

**GENERAL LIGHTING CATALOGUE
2024**



EDITION
48





COMPANY PROFILE



RISE Company Origination

Founded in 1987, RISE LIGHTING accumulates the rich experience and advantages in the area of traditional lighting. Focus at RISE LIGHTING is given to open, innovations and international cooperation while we continue to invest 5% of our revenue every year in R&D to ensure our products achieve high quality and can flexibly be used in thousands of different applications around the globe. We are proud of our powerful technology developments with the achievement of over 108 lighting-related patents. With our rich expertise in both traditional and LED lighting, a wide range of high-quality products, and dedicated service, we have gained a great reputation from clients in more than 60 countries worldwide as a leading role to support the ODM/OEM professional lighting solutions.

From a 4 people family factory to an international corporation, RISE LIGHTING has always upheld the Taiwanese spirit of hard-working and integrity. With "Reliability, Intelligence, Service, Excellence" as our brand value and management policy, the quality standards of "R.I.S.E" are strictly implemented from R&D and manufacturing to marketing services. We are even more proud to be your intimate supportive partner, dedicated to meeting your needs to help every lighting design show its unique beauty for a truly extraordinary experience. We believe that only when making our clients shine, we shine together.

After thirty years of development and accumulation, RISE LIGHTING is embarking on a new stage with a more forward-looking overall strategy, and to uphold the heart of craftsman and the art of innovation. We look forward to continuing working with you to illuminate the beauty and the hope of the world.



HEAD OFFICE
No.7, Wu Chuan 1 st rd., Hsin Chuang Dist.,
New Taipei City
TEL : 886-2-2299-0607 / 886-2-2299-0355
FAX : 886-2-2299-0615
<http://www.rise-lighting.com/>
E-mail : rise@rise-lighting.com.tw



GUANGDONG FACTORY
NO. 591, Jinhe Road, Hongqi Town, Jinwan District
Zhuhai City, Guangdong, China
Post Code : 519090
TEL : 86-756-3986688
FAX : 86-756-3997799



BEIJING OFFICE
15-6, East B district, Gaobeidian,
Chaoyang District, Beijing, China
Post Code : 100124
TEL : 86-10-5842-5511

Business Philosophy

「Customer is the basis of sustainable development of the enterprise」, this is our core philosophy. The customer, for us, is not just about direct customers, but also "customer's customers" and "all those who experience lighting". More attention, more meticulousness, and more flexible that have become our guidelines for planning projects, product designs, and marketing services. In addition to continuously improving the overall professional, innovative, diverse, and forward-looking standard; we always cherish every customer, to achieve the goal of sustainable business.



Business Commitment

Reliability
Intelligence
Service
Excellence

Corporation Values

From the founder's values: when the rice grows more mature, the more fruitful, the panicle more paddy down. We treat people and managing the company should be like rice: the more we grow; we must be more humble and honesty which are also reflected in our overall quality and service.



Milestone

1987 Founded in Taipei Taiwan
1992 Setup R&D department
1993 ISO9001 certified (Taiwan factory)
1994 Received Youth Entrepreneurship Award in Taiwan
1999 Setup lighting factory in Zhuhai and Zhejiang
2001 Won "Small Giant Award" from Ministry of Economic Affairs of Taiwan
2002 Zhuhai factory phase 2 begin & setup metal parts plant
2003 Setup Electronic factory in Zhuhai
2007 Zhuhai factory phase 3 begin & setup SMT anti-static workshop for LED products
2008 ISO9001 certified (Zhuhai factory)
2010 Established sales team in Beijing
Setup Optoelectronic department and introduce new brand SEICHE
2015 Production line fully upgraded to anti-static workshop
2016 Received "High-Tech Enterprises recognition" from People's Republic of China
2017 ISO9001-2015 certified (Zhuhai factory)



Scale

Total land: 48,000 square meter
Total employee: 500 people
Sales team: Taiwan (export and domestic), Beijing (domestic) and Zhuhai (export), member: 30
Design team: Taiwan, member: 15
R&D team: Zhuhai, member: 50



The Sales Team

Sales Team

RISE LIGHTING sales offices are located in both Taiwan & China; Zhuhai factory also has showrooms; we also launch new products through international lighting exhibitions in different regions. Through our strategic cooperation with professional raw material suppliers, we offer innovative design thinking and high standard products, which occupy a place in the rapidly changing lighting market. We have gained the support and trust from our clients and our products are sold in more than 60 countries worldwide.

Customize for you

In our vision, everything is possible; with over 30 years of accumulated research and development technology and production experience, we can create your OEM products according to your needs. Numerous successful experiences keep our team grow and strong.




R&D Team

Supporter of the wonderful moment
At RISE LIGHTING, every product is carefully developed to satisfy your needs. Our strong R&D team is delightful to explore the role of light in the life and is striving for amazing lighting experience. We have obtained more than 108 patents as we deeply understand each occasion requires different lighting solutions. We always stand by you for shining your creative values to the world.

The brainstorming from imagination and production ability, we also striving the balance between quality and beauty. We keep moving to create brilliant experience.

We can implement custom designs and meet unique customer requirements quickly and flexibly. In addition to the excitement of imagination and technology, we also pursue the balance of quality and aesthetics; and have an ever-increasing product portfolio that provides excellent performance and continuous product innovation. Creating an extraordinary lighting experience is the driving force behind our continuous progress.



Heat flow simulation



3D CAD



Laboratory

We have our own laboratory and test center, use safety regulations, material performance testing & product reliability as the core, so we can meet ENEC (Europe), UL / ETL / CSA (North America), CCC (China) And CNS (Taiwan) standards. We focused on 4 major areas: Light, Mechanical, Electrical, and Thermal. Our equipments include: Photometric, Integrating Sphere, Color Temperature Colorimeter, Glow-Wire testing, Needle-Flame testing, IK Impact testing, Vibration testing, IP testing, RoHS Spectrometer, Aging Durable Testing, Thermal Test Draft Shield, Programmable Constant Temperature and Humidity Testing, Thermal Shock Testing, etc., and other professional testing equipments to ensure that every aspect are in control.



Tension test and compression test



Photometric



Photometric



Integrating Sphere



Temp & humi chamber



Ip testing



Thermal test



Salt Spray

Optoelectronics Dept.

Optoelectronics Dept. provides all kinds of electronic products from the "SMT processing, DIP plug-in processing, assembly, testing, packaging" with semi-finished and finished products, providing in-house professional services.





Quality Control

Offering the best

In order to provide stable & reliable product, Zhuhai factory continued upgrading professional production equipments, production line are equipped with state of the art anti-static production workshop for LED productions. With our quality control procedures, cautious manufacturing process, consistency & timely supply ability is the cornerstone of RISE LIGHTING.

To be greatest

RISE LIGHTING is ISO9001 certified company, and was renewed to ISO9001-2015 in 2017. We have been sophisticated production capability and aiming to become the world's leading lighting manufacturer. We are confident and committed to provide the highest quality products to our client.



Environmental Friendly

We love light, hope, and love, as our slogan stands for "link a good life with light", we are committed to creating a comfortable working and living environment. We continue to be responsible for eco-friendly manufacturing, extensive research/development, energy-saving technology, design aesthetics, and altruism. Resources are used efficiently and recycled. Our employees have actively participated in environmental protection activities and related training programs.



Find The Right Luminaire Quickly

www.rise-lighting.com



Guide of catalogue

Photo



Model NO.

Article number 2118.125-LEA-14

Specification

LED Consumption	17W
Current	500 (mA)
Lumen	2004 (lm)
Beam Angle	30°/50°/60° (Lens)
CCT	3000K
CRI	90+



Bezel : ☒ Black ☐ White
Baffle : ☒ Black ☐ White



Dimmable



Dimension(mm)



Accessories



SG7-1
striped glass



H7-1
honeycomb louver




DS7-1
diffusion sheet

Finishing



Lighting Function

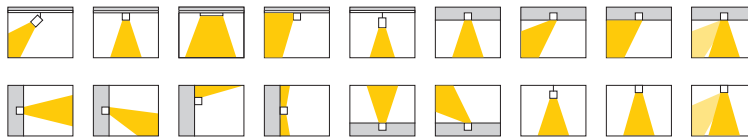


	Rotate Angle		Class I		CE Approved		DALI Dimming
	Downlight Tilt Angle		Class II		ETL Approved		TRIAC Dimming
	Spotlight Tilt Angle		Class III		RoHS Certified		1-10V Dimming
	IP Rating		Equipment fit for installation on normally inflammable surfaces.		Equipment fit for installation in and on furniture.		DIM TO WARM
	RF Control		UGR		UL Approved		T24 Approved

Cut out method & Dimension

	Round Cut out (mm)		Round Trim		Round Trimless
	Retangle Cut out (mm)		Square Trim		Square Trimless

IES

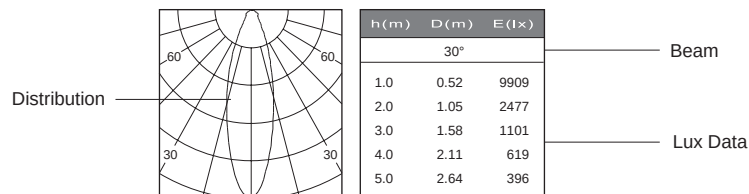


* Rise reserve the rights to improve & change the product spec.

Products index

TRACK LIGHTS

14

ASTER-A



24

ASTER-B



RECESSED DOWNLIGHTS

52

STAR-50



72

STARLUX



90

EPIC



138

BRANKO



184

STELLAR



202

FARFALLA



222

BRAVO



240

LOTUS



246

GAGA



256

NANIA



MULTIPLE LIGHTS

66

STAR



82

STARLUX



266

ESB



282

SHELL-S



290

SHELL-D



302


KANO



PENDANT LIGHTS

46

ASTER-B



318

SKYRIM



LINEAR LIGHTS

322

NAHHO



ASTER-A SERIES_(AM)



ASTER-A (AM)

ASTER-A is a high-efficiency lighting solution that offers energy savings and excellent color rendering. It is compact, efficient and provides a range of color temperature options, making it ideal for lighting retail environments. The product claims to improve performance by 4-5% under the same conditions.

Shape



Round
2.5"



Round
3.5"

Mountings



Track

Light distributions



Adjustable

ASTER-A



Standard



Long snout



Asymmetrical snout

- Distributions from narrow spot to wallwash
- Plug and play: change lens units without tools and with just one hand



Standard




Long snout



Asymmetrical snout





2319.xxx-**H3AM**-xxx

Adaptor(Halo)

3 wires single circuit track system




2319.xxx-**J2AM**-xxx

Adaptor(Juno)

2 wires single circuit track system



Lens



Striped glass



Honeycomb louver



Standard baffle



Long snout



Asymmetrical snout


ASTER-A round
Track spotlight



Specification

2700 K, 3000 K, 4000 K,
CRI $\geq$ 90
TRIAC

Types



Colours

Body :  
Black White


Baffle :    
Black White Mix Copper

Beam Angle





ASTER-A-64-RSP-H3AM

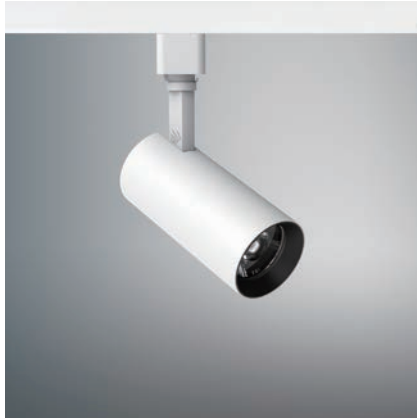


Article number	2319.200-H3AM-350
Fixture Consumption	15W
Current	350 (mA)
Voltage	AC 120V
Delivered Lumen	1342 (lm)
Beam Angle	20°/25°/38°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	TDI012NA035EF

Article number	2319.200-H3AM-500
Fixture Consumption	20W
Current	500 (mA)
Voltage	AC 120V
Delivered Lumen	1860 (lm)
Beam Angle	20°/25°/38°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	TDI018NA050EF



Dimmable



ASTER-A-64-RSP-J2AM




Article number	2319.200-J2AM-350
Fixture Consumption	15W
Current	350 (mA)
Voltage	AC 120V
Delivered Lumen	1342 (lm)
Beam Angle	20°/25°/38°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	TDI012NA035EF

Article number	2319.200-J2AM-500
Fixture Consumption	20W
Current	500 (mA)
Voltage	AC 120V
Delivered Lumen	1860 (lm)
Beam Angle	20°/25°/38°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	TDI018NA050EF



Dimmable



Accessories



S-001
Long snoot



S-002
Asymmetrical snoot




SG-001
Striped glass




H-001
Honeycomb louver

2319.200-H3AM-350
2319.200-J2AM-350




h(m)	D(m)	E(lx)
20°		
1.0	0.34	7449
2.0	0.69	1862
3.0	1.03	827
4.0	1.37	465
5.0	1.72	298

2319.200-H3AM-350
2319.200-J2AM-350




h(m)	D(m)	E(lx)
25°		
1.0	0.42	6371
2.0	0.84	1593
3.0	1.26	707
4.0	1.68	398
5.0	2.10	254

2319.200-H3AM-350
2319.200-J2AM-350




h(m)	D(m)	E(lx)
38°		
1.0	0.70	3175
2.0	1.39	793
3.0	2.09	352
4.0	2.78	198
5.0	3.48	127

2319.200-H3AM-350
2319.200-J2AM-350




h(m)	D(m)	E(lx)
50°		
1.0	0.93	1886
2.0	1.86	471
3.0	2.80	209
4.0	3.73	117
5.0	4.66	75

2319.200-H3AM-500
2319.200-J2AM-500




h(m)	D(m)	E(lx)
20°		
1.0	0.34	10148
2.0	0.68	2537
3.0	1.02	1128
4.0	1.36	634
5.0	1.70	405

2319.200-H3AM-500
2319.200-J2AM-500




h(m)	D(m)	E(lx)
25°		
1.0	0.42	8616
2.0	0.84	2154
3.0	1.25	957
4.0	1.67	538
5.0	2.09	344

2319.200-H3AM-500
2319.200-J2AM-500



h(m)	D(m)	E(lx)
38°		
1.0	0.69	4328
2.0	1.38	1082
3.0	2.07	480
4.0	2.75	270
5.0	3.44	173

2319.200-H3AM-500
2319.200-J2AM-500



h(m)	D(m)	E(lx)
50°		
1.0	0.94	2607
2.0	1.87	651
3.0	2.81	289
4.0	3.75	162
5.0	4.68	104

ASTER-A-90-RSP-H3AM



Article number	2319.221-H3AM-900
LED Consumption	31W
Current	900 (mA)
Voltage	AC 120V
Lumen	3770 (lm)
Beam Angle	18°/24°/36°/60° (Lens)
CCT	3000K
CRI	90+
Driver Model	TDI034NA090EF



Dimmable
TRIAC Driver Built-in



ASTER-A-90-RSP-J2AM



Article number	2319.221-J2AM-900
LED Consumption	31W
Current	900 (mA)
Voltage	AC 120V
Lumen	3770 (lm)
Beam Angle	18°/24°/36°/60° (Lens)
CCT	3000K
CRI	90+
Driver Model	TDI034NA090EF



Dimmable
TRIAC Driver Built-in



Accessories



S-012
Long snoot



S-013
Asymmetrical snoot



SG-007
Striped glass



H-002
Honeycomb louver



ASTER-B SERIES (AM)



ASTER-B (AM)

The ASTER-B series is designed for art enthusiasts seeking perfect gallery lighting. With impressive light quality, variable zoom, and framing capabilities, it offers diverse lighting effects. Its modular design allows easy component switching to adapt to different needs, reducing inventory pressure. Ideal for galleries, museums, and exhibitions, the ASTER-B series provides unparalleled precision even in temporary setups, ensuring an exceptional art-viewing experience.

Shape



Round
2.5"



Round
3.5"

Mountings



Track



Pendant

Light distributions



Adjustable

ASTER-B round



Round
2.5"



Round
3.5"

Track
Spotlight

(Halo) /
(Juno)



ASTER-B



ASTER-B

Track
Pendant

(Halo) /
(Juno)



Pendant Wire



Pendant Stem



Pendant Wire



Pendant Stem



Standard



Long snoot



Asymmetrical snoot



Oval Snoot



Framing



Zoomable



ASTER-B is a high-quality gallery lighting solution that can enhance the presentation of works of art and other exhibitions. With its precise lighting control and advanced optical components, it can provide clear and precise lighting that helps to create the ideal color impression for outstanding viewing experiences. Additionally, its versatility and adaptability make it ideal for use in a variety of settings, including museums, exhibition halls, and other special lighting needs. Whether you need to highlight a single artwork or create a dynamic lighting display for an entire exhibition, ASTER-B is an excellent choice for your lighting needs.

Selection adaptor



2319.xxx-**H3AM**-xxx

Adaptor(Halo)

3 wires single circuit track system




2319.xxx-**J2AM**-xxx

Adaptor(Juno)

2 wires single circuit track system

The Halo 3-wire system is suitable for situations requiring independent control of lighting brightness and color, such as special display areas. On the other hand, the Juno 2-wire system is suitable for general indoor lighting needs with simple and practical functionality. The choice should be based on specific requirements to ensure satisfaction with lighting effects and control demands.

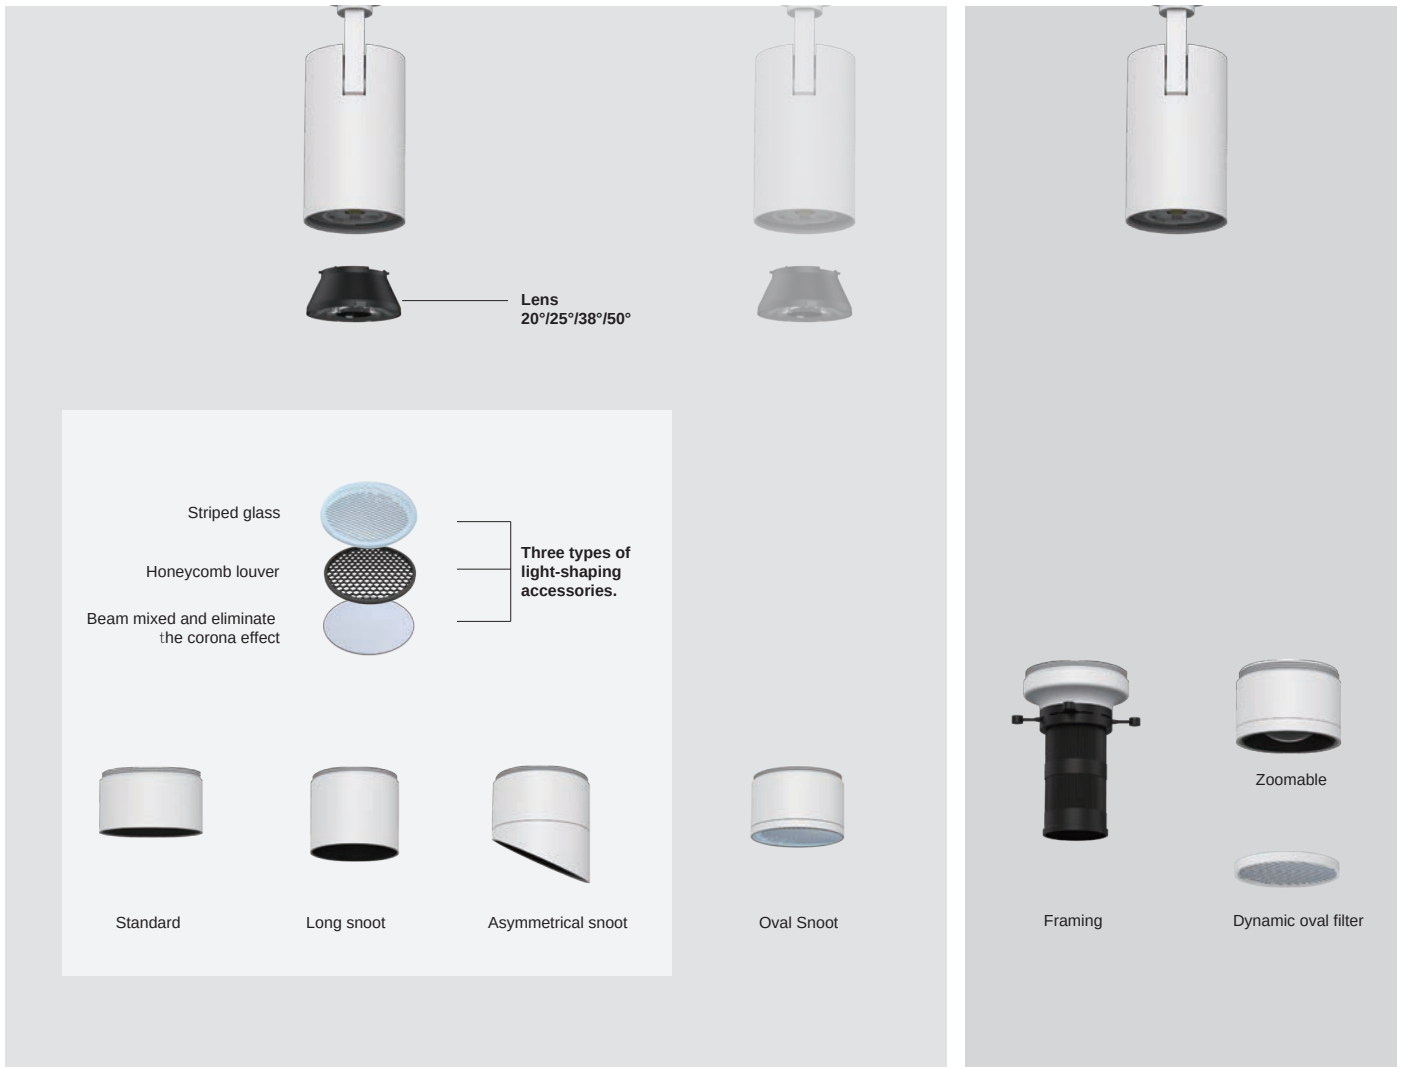

Multiple variations

The ASTER-B series features a modular design with separate components and a lightweight engine structure, allowing easy component switching to adapt to different settings and requirements. Particularly notable are its variable zoom and framing capabilities, setting the ASTER-B series apart in venues with specific lighting needs such as galleries, museums, and exhibitions. This unique feature enables the ASTER-B series to provide high-precision light guidance unmatched by other spotlights, even in temporary exhibitions, showcasing optimal results.

- Distributions from narrow spot to wallwash
- Adjustable contour and zoom spotlights available
- Plug and play: change lens units without tools and with just one hand




Standard



spot / medium / flood / wide flood




Long snoot




spot / medium / flood / wide flood




Asymmetrical snoot





spot / medium / flood / wide flood




Oval filter

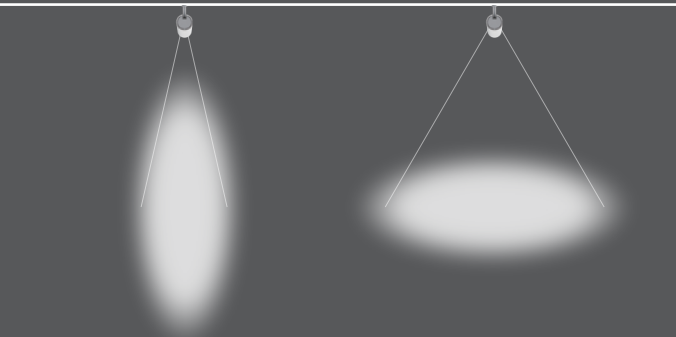

Framing

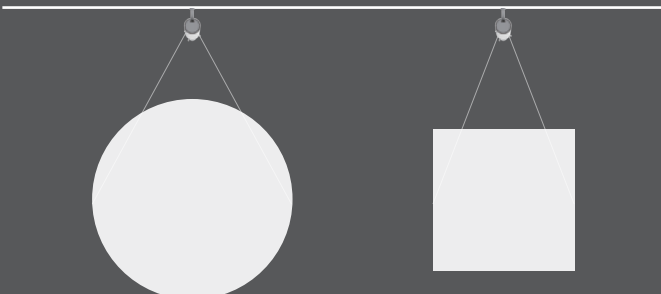

Zoomable

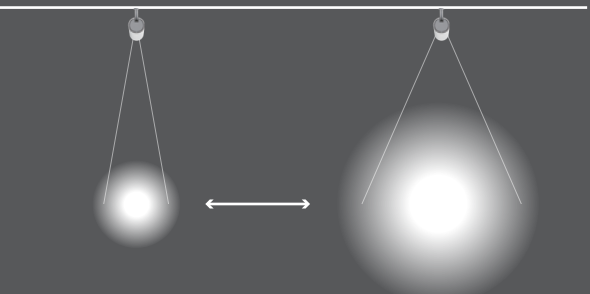


ASTER-B round
Track spotlight



Specification

2700 K, 3000 K, 4000 K,
CRI ≥ 95
TRIAC
Halo, Juno

Types



Colours

Body :  
Black White

Baffle :    
Black White Mix Copper

Beam Angle



spot / medium / flood / wide flood(Lens)



ASTER-B-64-RSP-H3AM




Article number	2319.201-H3AM-350
Fixture Consumption	15W
Current	350 (mA)
Voltage	AC 120V
Delivered Lumen	1185 (lm)
Beam Angle	20°/25°/38°/50° (Lens)
CCT	3000K
CRI	95+
Driver Model	TDI012NA035EF

Article number	2319.201-H3AM-500
Fixture Consumption	20W
Current	500 (mA)
Voltage	AC 120V
Delivered Lumen	1660 (lm)
Beam Angle	20°/25°/38°/50° (Lens)
CCT	3000K
CRI	95+
Driver Model	TDI018NA050EF



Dimmable

TRIAC Driver Built-in

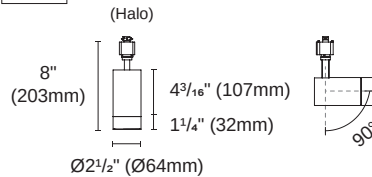

ASTER-B-64-RSP-J2AM




Article number	2319.201-J2AM-350
Fixture Consumption	15W
Current	350 (mA)
Voltage	AC 120V
Delivered Lumen	1185 (lm)
Beam Angle	20°/25°/38°/50° (Lens)
CCT	3000K
CRI	95+
Driver Model	TDI012NA035EF

Article number	2319.201-J2AM-500
Fixture Consumption	20W
Current	500 (mA)
Voltage	AC 120V
Delivered Lumen	1660 (lm)
Beam Angle	20°/25°/38°/50° (Lens)
CCT	3000K
CRI	95+
Driver Model	TDI018NA050EF




Dimmable

TRIAC Driver Built-in

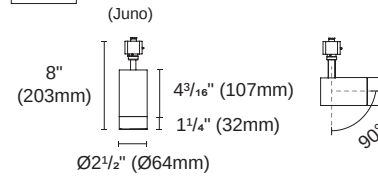


2319.201-H3AM-350




h(m)	D(m)	E(lx)
38°		
1.0	0.92	1719
2.0	1.84	429
3.0	2.77	190
4.0	3.69	107
5.0	4.61	68

2319.201-H3AM-500



h(m)	D(m)	E(lx)
38°		
1.0	0.69	4063
2.0	1.38	1016
3.0	2.07	451
4.0	2.76	253
5.0	3.45	162

Accessories



S-004
Long snoot



S-005
Asymmetrical snoot



SG-003
Oval snoot



H-001
Honeycomb louver



DS-001
Beam mixed and eliminate
the corona effect


ASTER-B-90-RSP-H3AM



Article number	2319.222-H3AM-900
LED Consumption	31W
Current	900 (mA)
Voltage	AC 120V
Lumen	3415 (lm)
Beam Angle	18°/24°/36°/60° (Lens)
CCT	3000K
CRI	95+
Driver Model	TDI034NA090EF



Dimmable

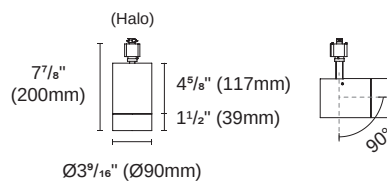


ASTER-B-90-RSP-J2AM




Article number	2319.222-J2AM-900
LED Consumption	31W
Current	900 (mA)
Voltage	AC 120V
Lumen	3415 (lm)
Beam Angle	18°/24°/36°/60° (Lens)
CCT	3000K
CRI	95+
Driver Model	TDI034NA090EF



Dimmable

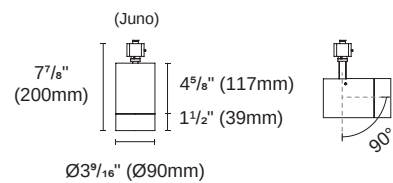

Accessories



S-009
Long snoot




S-010
Asymmetrical snoot



SG-005
Oval Snoot

ASTER-B Framing

Track spotlight

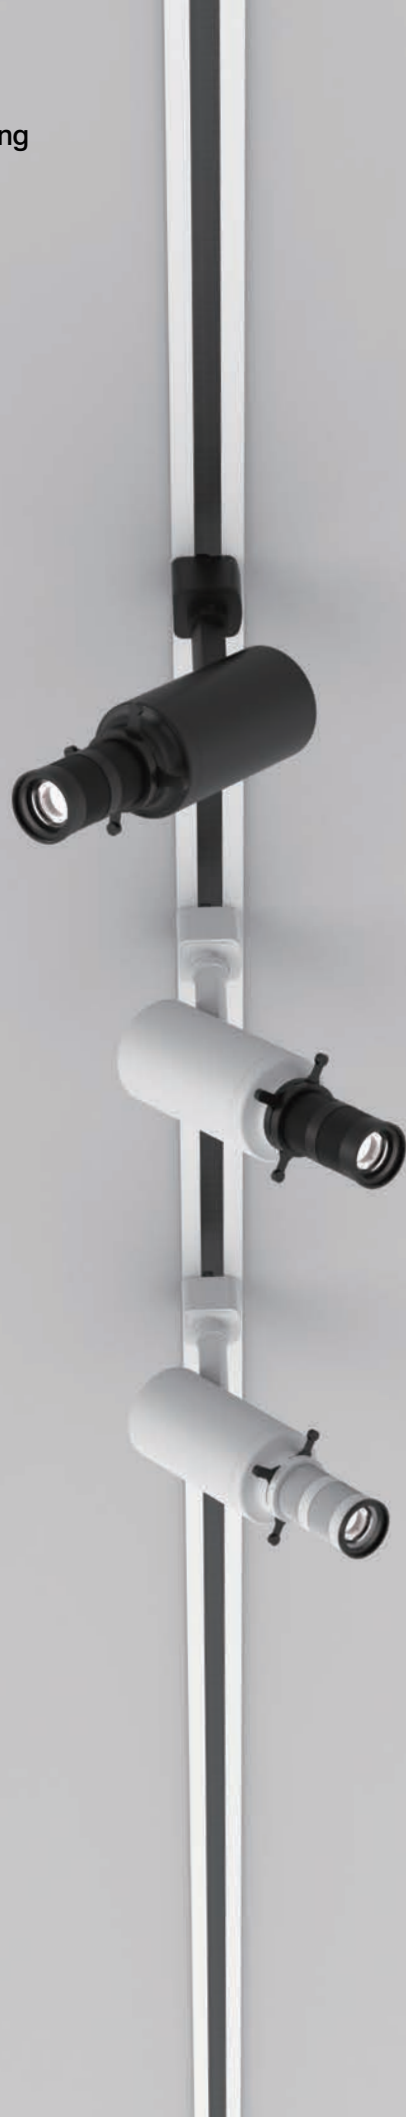


Specification

2700 K, 3000 K,

CRI ≥ 95

Halo, Juno

Types



Colours

Body :  
Black White

Framing:   
Black White Mix

Beam Angle



Ø2.5" : 20°~30°(Lens)

Ø3.5" : 25°~35°(Lens)



Framing



Professional-grade optical lens

Crafted with a combination of high-quality multi-layer lenses to enhance light transmission, providing high adjustability, uniform light output, and a wide zoom range.

1. Lamp Body Dimensions

Available in various diameters of 1.6"/2.5"/3.5", with color options of black or white.

2. Optical adjustable aperture plates

External wings for manual adjustment of shapes
The spot shape can be arbitrarily changed by adjusting the aperture plates.

3. Gobo

Customization gobo



4. Focus damping knob

Precision adjustment by rotating the body without having to open the product



5. Zoom damping knob

Rotate it can change the size of spot, zoom 20°-30°



6. High quality coated Optical lenses

Can attach various color filters.




Circle



Trapezoid



Irregular shape



Square




Triangle

Framing


Precisely custom-lighting

The framing function for the ASTER series can create a strong visual contrast to let viewers focus on the subject. On the other hand, the framing function light also can input the gobo slide to project words, logos, and photographs to let an area full of spirits and characteristics. This framing function light for the ASTER series is suited for museums, galleries, and business showrooms.

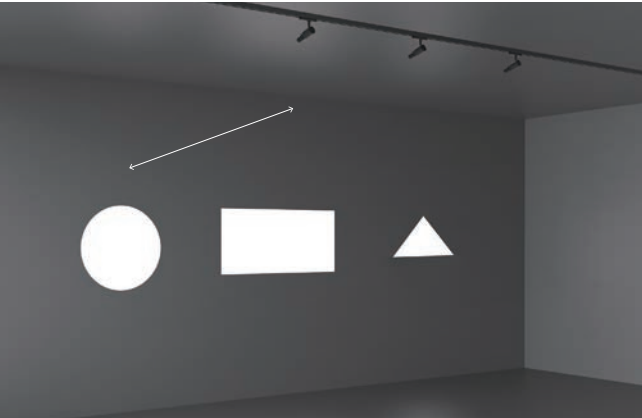


Framing-64		Installation advice		
Lamp to wall	1M	2M	3M	
	Min: Ø40cm Max: Ø60cm	Min: Ø80cm Max: Ø120cm	Min: Ø120cm Max: Ø180cm	
	Min: □28cm Max: □42cm	Min: □56cm Max: □84cm	Min: □84cm Max: □126cm	


Framing-90		Installation advice		
Lamp to wall	1M	2M	3M	
	Min: Ø48cm Max: Ø69cm	Min: Ø96cm Max: Ø138cm	Min: Ø144cm Max: Ø207cm	
	Min: □34cm Max: □49cm	Min: □68cm Max: □98cm	Min: □102cm Max: □147cm	

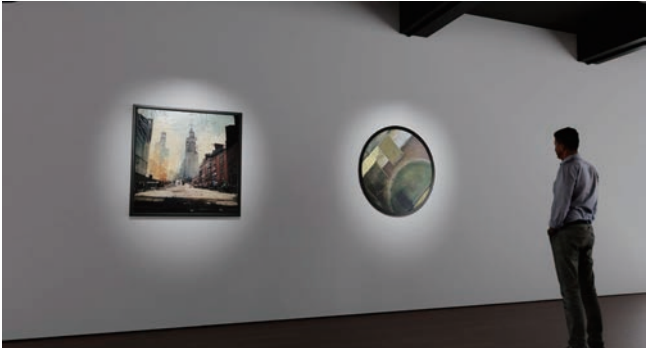

The general projection light effect

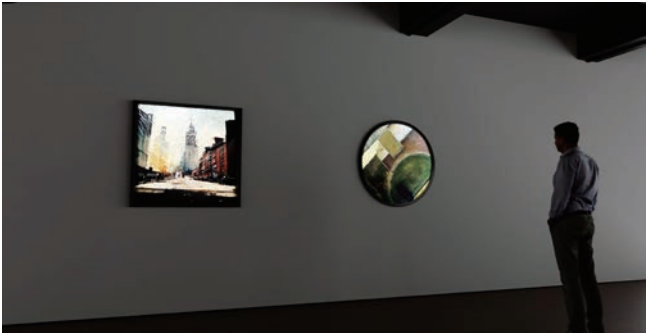


The cut-off light is used to create a specific lighting effect by cutting off the light at a certain point and directing it in a specific direction. This can be used to create a sharp boundary between lit and unlit areas, emphasizing the illuminated areas and creating contrast.

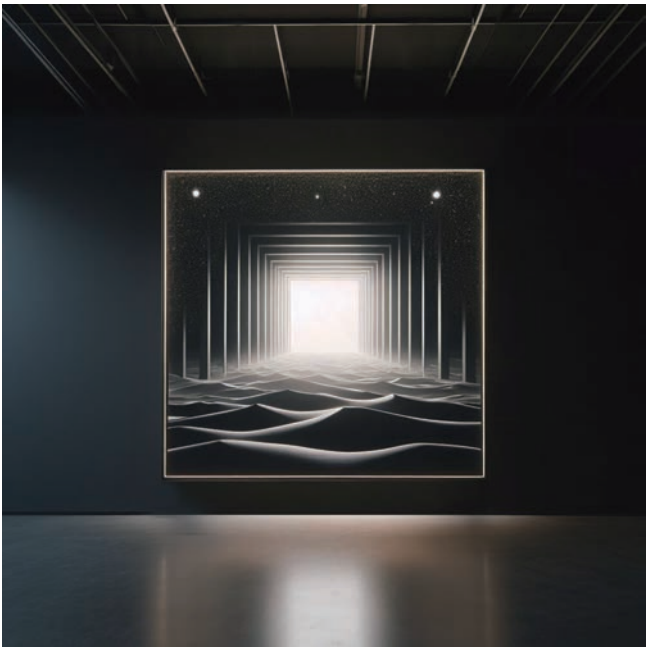

Available with color filter

Using colored light, you can design and transform environments with subtle or dramatic contrasts. LED enables you to produce colored light very efficiently and flexibly.

The focus lens can be installed in the light bar part of the logo piece to meet customer and site requirements. Additionally, different color change film can also be added to the logo piece to add variation.



There is a variety of color changing lenses available for selection.



Before



After



After

Customization gobo

We use premium materials to customize exclusive customization gobo for each customer, showcasing professional lighting effects.

You can effortlessly create the light art you desire, perfectly aligning with your theme and expressing the unique style you want to convey.




Logo icon projection



Marketing projection



Physical landscape projection



Product projection



ASTER-B-F-64-RSP-H3AM




Article number	2319.201F-H3AM-350
Fixture Consumption	15W
Current	350 (mA)
Voltage	AC 120V
Delivered Lumen	418 (lm)
Beam Angle	20°~30°(Lens)
CCT	3000K
CRI	95+
Driver Model	TDI012NA035EF

Article number	2319.201F-H3AM-500
Fixture Consumption	20W
Current	500 (mA)
Voltage	AC 120V
Delivered Lumen	598 (lm)
Beam Angle	20°~30°(Lens)
CCT	3000K
CRI	95+
Driver Model	TDI018NA050EF



Dimmable

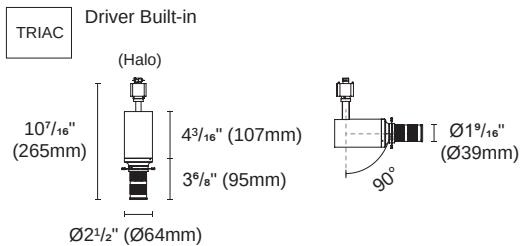

ASTER-B-F-64-RSP-J2AM




Article number	2319.201F-J2AM-350
Fixture Consumption	15W
Current	350 (mA)
Voltage	AC 120V
Delivered Lumen	418 (lm)
Beam Angle	20°~30°(Lens)
CCT	3000K
CRI	95+
Driver Model	TDI012NA035EF


Article number	2319.201F-J2AM-500
Fixture Consumption	20W
Current	500 (mA)
Voltage	AC 120V
Delivered Lumen	598 (lm)
Beam Angle	20°~30°(Lens)
CCT	3000K
CRI	95+
Driver Model	TDI018NA050EF



Dimmable

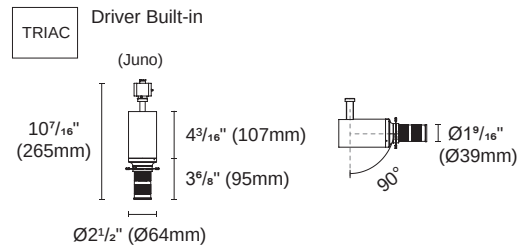


2319.201F-H3AM-350




h (m)	D (m)	E (lx)
	30°	
1.0	0.56	1961
2.0	1.13	490
3.0	1.70	217
4.0	2.26	122
5.0	2.83	78

2319.201F-H3AM-500



h (m)	D (m)	E (lx)
	30°	
1.0	0.56	2778
2.0	1.13	694
3.0	1.69	308
4.0	2.26	173
5.0	2.82	111

Accessories



CF-001-xxx
Color filter



GOBO-001-xxx...
OEM GOBO, please contact with our sales rep for more info


ASTER-B-F-90-RSP-H3AM



Article number	2319.222F-H3AM-850
LED Consumption	31W
Current	850 (mA)
Voltage	AC 120V
Lumen	3415 (lm)
Beam Angle	25°~ 35°(Lens)
CCT	3000K
CRI	95+
Driver Model	TDI032NA850EF



Dimmable

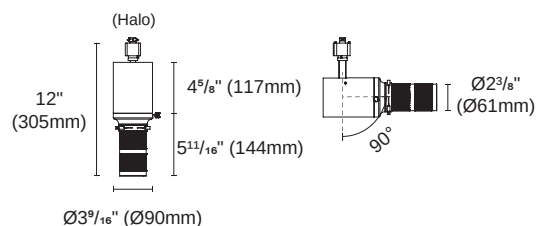


ASTER-B-F-90-RSP-J2AM




Article number	2319.222F-J2AM-850
LED Consumption	31W
Current	850 (mA)
Voltage	AC 120V
Lumen	3415 (lm)
Beam Angle	25°~ 35°(Lens)
CCT	3000K
CRI	95+
Driver Model	TDI032NA850EF




Dimmable

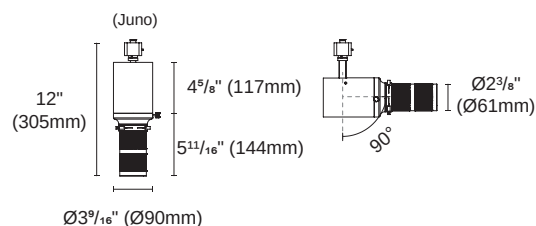

Accessories



CF-002-xxx
Color filter



GOBO-002-xxx...
OEM GOBO, please contact with our sales rep for more info


ASTER-B Zoomable
Track spotlight



Specification

2700 K, 3000 K, 4000 K,
CRI ≥ 95
Halo, Juno

Types




Colours

- Body : ☒ Black ☐ White
- Baffle : ☒ Black ☐ White

Beam Angle

-  
- Ø2.5" : 15°~55°(Lens)
- Ø3.5" : 16°~60°(Lens)




zoomable




Easily add dynamic oval filter accessories as desired, installation and adjustment are extremely simple and convenient. making it comfortable for the user to adapt the lighting according to meet the specific needs of the space.

Colours : black / white




ASTER-B-Z-64



	Lamp to wall	1M	2M	3M	Oval filter
Zoom in 55°		Max: Ø120cm	Max: Ø240cm	Max: Ø360cm	
Zoom out 15°		Max: Ø30mm	Max: Ø60mm	Max: Ø90mm	




ASTER-B-Z-90



	Lamp to wall	1M	2M	3M	Oval filter
Zoom in 55°		Max: Ø130cm	Max: Ø260cm	Max: Ø390cm	
Zoom out 15°		Max: Ø35mm	Max: Ø70mm	Max: Ø105mm	



ASTER-B-Z-64-RSP-H3AM

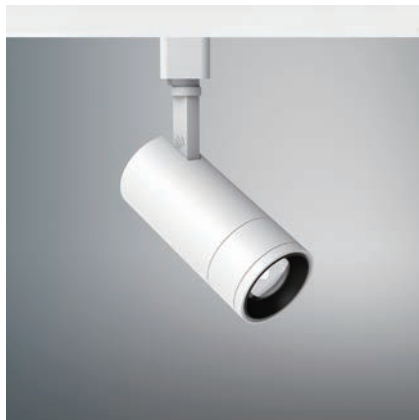


Article number	2319.201Z-H3AM-350
Fixture Consumption	15W
Current	350 (mA)
Voltage	AC 120V
Delivered Lumen	815 (lm)
Beam Angle	15°~55° (Lens)
CCT	3000K
CRI	95+
Driver Model	TDI012NA035EF

Article number	2319.201Z-H3AM-500
Fixture Consumption	20W
Current	500 (mA)
Voltage	AC 120V
Delivered Lumen	1141 (lm)
Beam Angle	15°~55° (Lens)
CCT	3000K
CRI	95+
Driver Model	TDI018NA050EF




Dimmable

TRIAC Driver Built-in

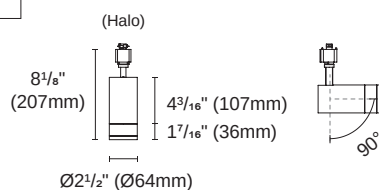

ASTER-B-Z-64-RSP-J2AM

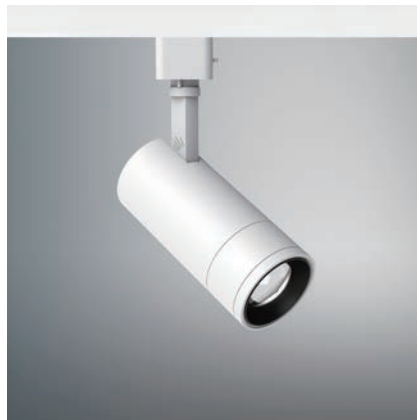


Article number	2319.201Z-J2AM-350
Fixture Consumption	15W
Current	350 (mA)
Voltage	AC 120V
Delivered Lumen	815 (lm)
Beam Angle	15°~55° (Lens)
CCT	3000K
CRI	95+
Driver Model	TDI012NA035EF

Article number	2319.201Z-J2AM-500
Fixture Consumption	20W
Current	500 (mA)
Voltage	AC 120V
Delivered Lumen	1141 (lm)
Beam Angle	15°~55° (Lens)
CCT	3000K
CRI	95+
Driver Model	TDI018NA050EF




Dimmable

TRIAC Driver Built-in

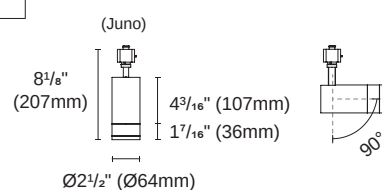


2319.201Z-H3AM-350



h (m)	D (m)	E (lx)
55°		
1.0	1.03	1173
2.0	2.05	293
3.0	3.08	130
4.0	4.11	73
5.0	5.14	46

2319.201Z-H3AM-500



h (m)	D (m)	E (lx)
55°		
1.0	1.03	1634
2.0	2.07	408
3.0	3.10	181
4.0	4.14	102
5.0	5.17	65

Accessories




SG-004
Dynamic oval filter


ASTER-B-Z-90-RSP-H3AM



Article number	2319.222Z-H3AM-900
LED Consumption	31W
Current	900 (mA)
Voltage	AC 120V
Lumen	3415 (lm)
Beam Angle	16°~60° (Lens)
CCT	3000K
CRI	95+
Driver Model	TDI034NA090EF




Dimmable

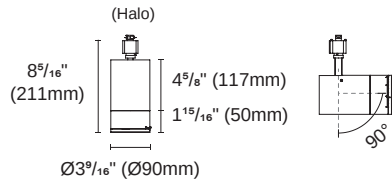



ASTER-B-Z-90-RSP-J2AM



Article number	2319.222Z-J2AM-900
ED Consumption	31W
Current	900 (mA)
Voltage	AC 120V
Lumen	3415 (lm)
Beam Angle	16°~60° (Lens)
CCT	3000K
CRI	95+
Driver Model	TDI034NA090EF



Dimmable

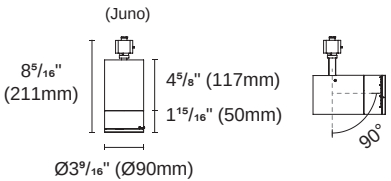

Accessories



SG-006
Dynamic oval filter


ASTER-B round
Track pendant



Specification

2700 K, 3000 K, 4000 K,
CRI ≥ 90
TRIAC

Types



Colours

Body : Black White Custom
Baffle : Black White Custom

(MOQ is required for custom colours)

Beam Angle

15°/24°/36°/60°(Lens)



ASTER-B-64-RPS-H3AM-C2



Article number 2319.204L-H3AM-C2-350

Fixture Consumption	15W
Current	350 (mA)
Voltage	AC 120V
Lumen	1454 (lm)
Beam Angle	15°/24°/36°/60°(Lens)
CCT	3000K
CRI	90+
Driver Model	TDI012NA035EF

Article number 2319.204L-H3AM-C2-500


Fixture Consumption	20W
Current	500 (mA)
Voltage	AC 120V
Lumen	2004 (lm)
Beam Angle	15°/24°/36°/60°(Lens)
CCT	3000K
CRI	90+
Driver Model	TDI018NA050EF



Dimmable



Driver Built-in



ASTER-B-64-RPS-H3AM-C4



Article number 2319.204L-H3AM-C4-350

Fixture Consumption	15W
Current	350 (mA)
Voltage	AC 120V
Lumen	1454 (lm)
Beam Angle	15°/24°/36°/60°(Lens)
CCT	3000K
CRI	90+
Driver Model	TDI012NA035EF

Article number 2319.204L-H3AM-C4-500


Fixture Consumption	20W
Current	500 (mA)
Voltage	AC 120V
Lumen	2004 (lm)
Beam Angle	15°/24°/36°/60°(Lens)
CCT	3000K
CRI	90+
Driver Model	TDI018NA050EF



Dimmable



Driver Built-in



Accessories



H-001
Honeycomb louver

ASTER-B-64-RPS-J2AM-C2



Article number	2319.204L-J2AM-C2-350
Fixture Consumption	15W
Current	350 (mA)
Voltage	AC 120V
Lumen	1454 (lm)
Beam Angle	15°/24°/36°/60°(Lens)
CCT	3000K
CRI	90+
Driver Model	TDI012NA035EF


Article number	2319.204L-J2AM-C2-500
Fixture Consumption	20W
Current	500 (mA)
Voltage	AC 120V
Lumen	2004 (lm)
Beam Angle	15°/24°/36°/60°(Lens)
CCT	3000K
CRI	90+
Driver Model	TDI018NA050EF



Dimmable



Driver Built-in




ASTER-B-64-RPS-J2AM-C4



Article number	2319.204L-J2AM-C4-350
Fixture Consumption	15W
Current	350 (mA)
Voltage	AC 120V
Lumen	1454 (lm)
Beam Angle	15°/24°/36°/60°(Lens)
CCT	3000K
CRI	90+
Driver Model	TDI012NA035EF


Article number	2319.204L-J2AM-C4-500
Fixture Consumption	20W
Current	500 (mA)
Voltage	AC 120V
Lumen	2004 (lm)
Beam Angle	15°/24°/36°/60°(Lens)
CCT	3000K
CRI	90+
Driver Model	TDI018NA050EF



Dimmable



Driver Built-in



Accessories



H-001
Honeycomb louver

ASTER-B-64-RPS-H3AM-P2



Article number	2319.204L-H3AM-P2-350
Fixture Consumption	15W
Current	350 (mA)
Voltage	AC 120V
Lumen	1454 (lm)
Beam Angle	15°/24°/36°/60°(Lens)
CCT	3000K
CRI	90+
Driver Model	TDI012NA035EF


Article number	2319.204L-H3AM-P2-500
Fixture Consumption	20W
Current	500 (mA)
Voltage	AC 120V
Lumen	2004 (lm)
Beam Angle	15°/24°/36°/60°(Lens)
CCT	3000K
CRI	90+
Driver Model	TDI018NA050EF



Dimmable



Driver Built-in



ASTER-B-64-RPS-H3AM-P4



Article number	2319.204L-H3AM-P4-350
Fixture Consumption	15W
Current	350 (mA)
Voltage	AC 120V
Lumen	1454 (lm)
Beam Angle	15°/24°/36°/60°(Lens)
CCT	3000K
CRI	90+
Driver Model	TDI012NA035EF


Article number	2319.204L-H3AM-P4-500
Fixture Consumption	20W
Current	500 (mA)
Voltage	AC 120V
Lumen	2004 (lm)
Beam Angle	15°/24°/36°/60°(Lens)
CCT	3000K
CRI	90+
Driver Model	TDI018NA050EF



Dimmable



Driver Built-in



Accessories



H-001
Honeycomb louver

ASTER-B-64-RPS-J2AM-P2



Article number	2319.204L-J2AM-P2-350
Fixture Consumption	15W
Current	350 (mA)
Voltage	AC 120V
Lumen	1454 (lm)
Beam Angle	15°/24°/36°/60°(Lens)
CCT	3000K
CRI	90+
Driver Model	TDI012NA035EF


Article number	2319.204L-J2AM-P2-500
Fixture Consumption	20W
Current	500 (mA)
Voltage	AC 120V
Lumen	2004 (lm)
Beam Angle	15°/24°/36°/60°(Lens)
CCT	3000K
CRI	90+
Driver Model	TDI018NA050EF



Dimmable



Driver Built-in



ASTER-B-64-RPS-J2AM-P4



Article number	2319.204L-J2AM-P4-350
Fixture Consumption	15W
Current	350 (mA)
Voltage	AC 120V
Lumen	1454 (lm)
Beam Angle	15°/24°/36°/60°(Lens)
CCT	3000K
CRI	90+
Driver Model	TDI012NA035EF


Article number	2319.204L-J2AM-P4-500
Fixture Consumption	20W
Current	500 (mA)
Voltage	AC 120V
Lumen	2004 (lm)
Beam Angle	15°/24°/36°/60°(Lens)
CCT	3000K
CRI	90+
Driver Model	TDI018NA050EF



Dimmable



Driver Built-in



Accessories



H-001
Honeycomb louver

STAR SERIES (AM-C.C.)



STAR (AM)

Small enough to be held by 2 fingers easily. Which is small and compact for blending into the ceiling perfectly, High Lumen and did not even notice the small lighting fixture in the ceiling. With a unique anti-glare feature to present soft and comfortable light emission providing UGR<19. It can apply to numerous situations, such as residential and commercial lighting.

Shape
(Baffle Size)




Round 1.5" Square 1.5" 2 lamp 1.5"

Mountings



Recessed Trim Recessed Trimless

Light distributions



Fixed Adjustable Wallwash

STAR-1.5"
recessed downlights



LEA-09B



LEA-09B-DW
Dim to warm



Fixed



Adjustable



Wallwash

Round

Trim



Trimless



Square

Trim



Trimless



Multiple lights

2 Lamp
Trim





STAR-1.5"


RISE's STAR-1.5" deliver high lumens to your spaces while remaining fully workable from below the ceiling plane.

FEATURES


- STAR-1.5" downlight offer a tiny new form element for a minutest downlight artistic.
- Micro trim style is well suited with sheetrock, ACT, wood/ millwork, and many other ceiling materials
- Industry leading luminescence and craftsmanship




Doubles combinations




Fixed

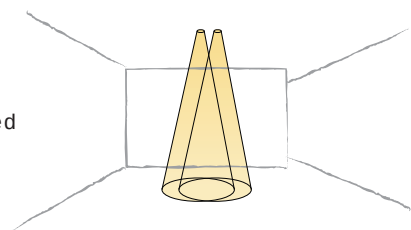

Adjustable



Wallwash





STAR-1.5"



Fixed



Adjustable

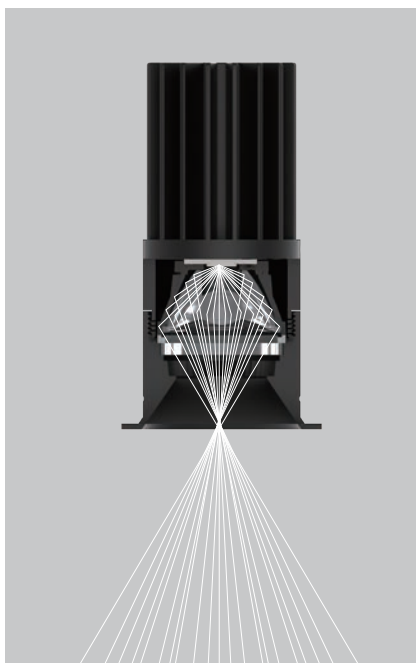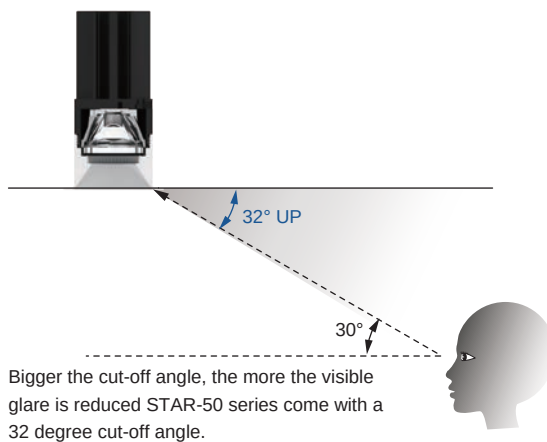

optics

Deep baffle design helps reduce glare, equipped with special selected lens, the light is evenly spread towards the centre to achieve the beam angles needed, making STAR a unique series.

Light Distribution



NARROW







MIDDLE



WIDE




SUPER WIDE



Constant current

1 to multiple fixtures

Rise's STAR-1.5" are compatible with all common lighting controls; choose from Traic, 0-10V dimming.

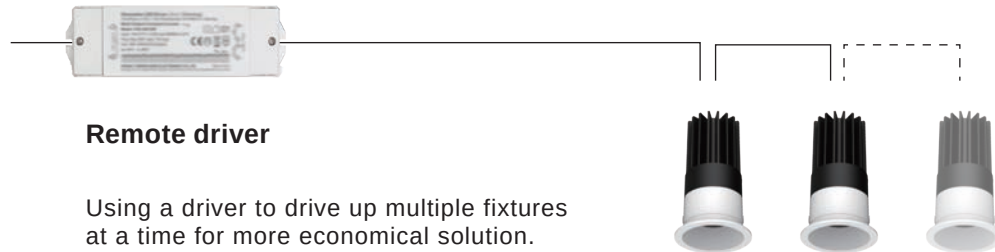

Remote driver


Using a driver to drive up multiple fixtures at a time for more economical solution.

Driver Storage

***Recommended Installation* :**
Drivers can be stored into maintenance hole of the enclosure for easy access.

Size : 20" x 16" x H:3.94"

Max circuit length 1181¹/₈"(30M) with wire gauge 12AWG.



Optional driver available



KIG-040-DW
Type: Driver

Triac / 0-10V/1-10V/Potentiometer/10V
PWM 5 in 1 Dimmable LED driver
Multi-current output series 40W
For 1~3T



PUP10A-1WMC-700
Type: Driver

0/1-10V
Output: 500mA/2-20V/10W
400mA/2-21V/8.4W
For 1T



PUP20A-1WMC
Type: Driver

0/1-10V
Output: 500mA/9-40V/20W
400mA/9-45V/18W
For 1~2T



PUP10T-1LMC-700
Type: Driver

Triac
Output: 500mA/2-20VDC/10W
400mA/2-21VDC/8.4W
For 1T



PUP20T-1LMC
Type: Driver

Triac
Output: 500mA/9-40V/20W
400mA/9-45V/18W
For 1~2T



PUP10D-1WMC-700
Type: Driver

Dali
Output: 500mA/2-20V/10W
400mA/2-21V/8.4W
For 1T




PUP20D-1WMC
Type: Driver

Dali
Output: 500mA/9-40V/20W
400mA/9-45V/18W
For 1~2T




ACOT-106
Type: Quick connector

NON-IC

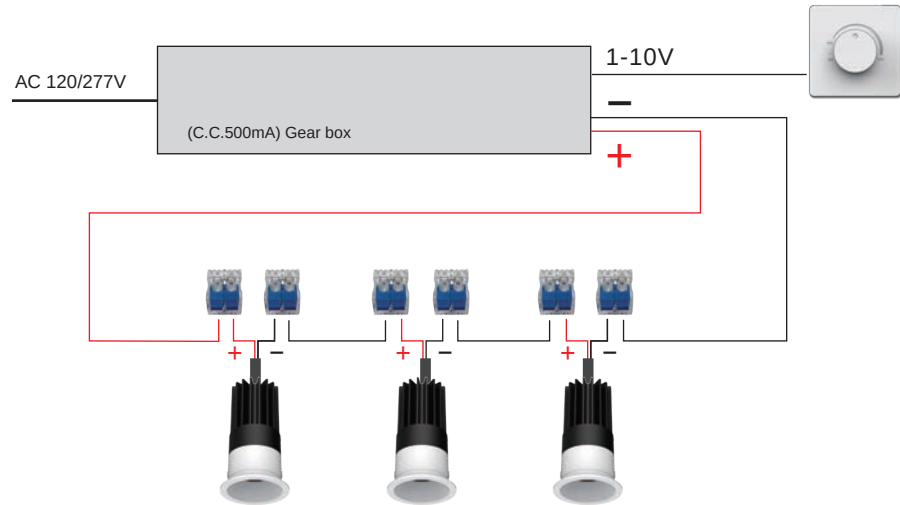

IC-BOX

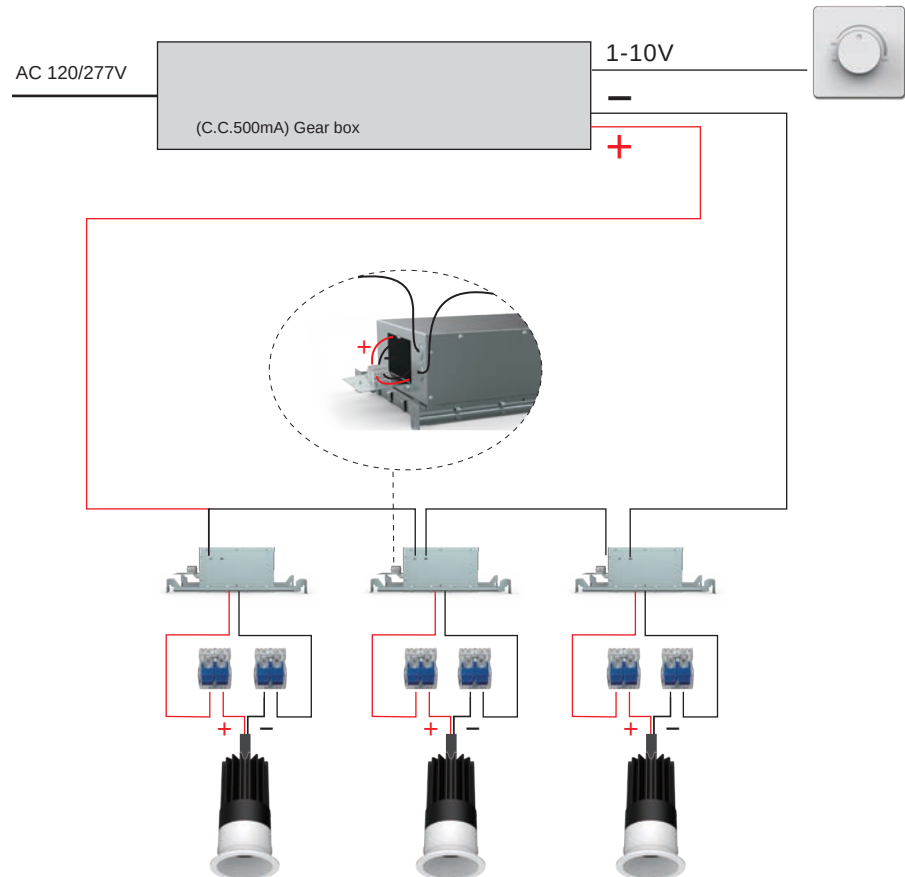

STAR-1.5" round / square
fixed / adjustable / wallwash




Specification

2700 K, 3000 K, 4000 K,
CRI ≥ 90

TRIAC, 1-10V

Types (round & square)



Colours

Collar :  Black  White

Beam Angle



20°/25°/35°/50° (Lens)




Wallwash (Lens)



STAR-50-RTF






Article number	2118.564-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	703 (lm)
Beam Angle	20°/25°/35°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable

TRIAC	1-10V
-------	-------

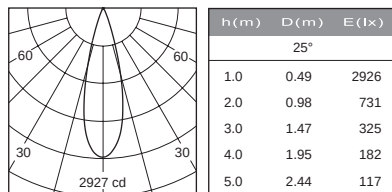
 Cut out : 1²⁶/₃₂" (46mm)



Accessories

ACHO-18
honeycomb louver
+PC sheetSG-002
Striped GlassS-015
Anti glare ring

STAR-50-RTA






Article number	2118.565-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	654 (lm)
Beam Angle	20°/25°/35°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable

TRIAC	1-10V
-------	-------

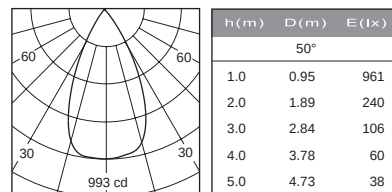
 Cut out : 1²⁶/₃₂" (46mm)



Accessories

ACHO-18
honeycomb louver
+PC sheetSG-002
Striped Glass

STAR-50-RTW






Article number	2318.100-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	398 (lm)
Beam Angle	Wallwash (Lens)
CCT	3000K
CRI	90+



Dimmable


TRIAC	1-10V
-------	-------

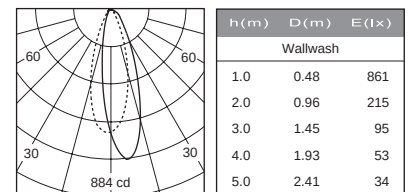
 Cut out : 1²⁶/₃₂" (46mm)


STAR-50-RTLF





Article number	2118.659F-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	703 (lm)
Beam Angle	20°/25°/35°/50° (Lens)
CCT	3000K
CRI	90+




Dimmable

TRIAC	1-10V
-------	-------



Cut out : 2 1/4" (54mm)

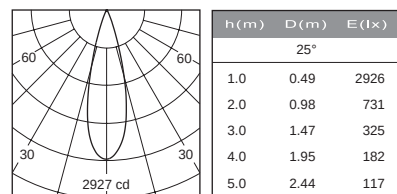

Accessories

ACHO-18
honeycomb louver
+PC sheetSG-002
Striped GlassS-015
Anti glare ring

STAR-50-RTLA





Article number	2118.660F-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	654 (lm)
Beam Angle	20°/25°/35°/50° (Lens)
CCT	3000K
CRI	90+




Dimmable

TRIAC	1-10V
-------	-------



Cut out : 2 1/4" (54mm)

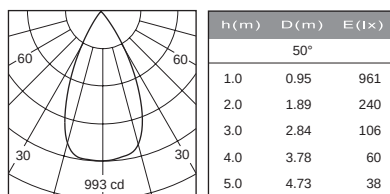


Accessories

ACHO-18
honeycomb louver
+PC sheetSG-002
Striped Glass

STAR-50-RTLW





Article number	2318.200F-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	398 (lm)
Beam Angle	Wallwash (Lens)
CCT	3000K
CRI	90+




Dimmable

TRIAC	1-10V
-------	-------




Cut out : 2 1/4" (54mm)

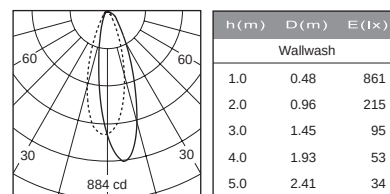





STAR-50-STF



Article number	2218.117-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	676 (lm)
Beam Angle	20°/25°/35°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable

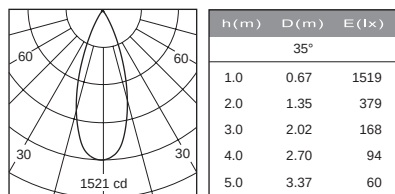
 Cut out : 1²⁶/₃₂"X1²⁶/₃₂" (46X46mm)





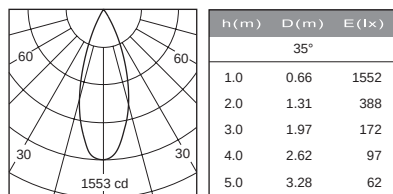
STAR-50-STA



Article number	2218.118-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	632 (lm)
Beam Angle	20°/25°/35°/50° (Lens)
CCT	3000K
CRI	90+




Dimmable


 Cut out : 1²⁶/₃₂"X1²⁶/₃₂" (46X46mm)




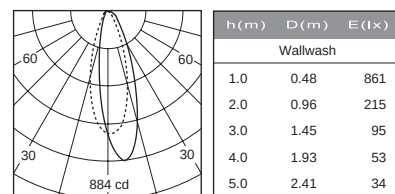
STAR-50-STW



Article number	2318.104-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	398 (lm)
Beam Angle	Wallwash (Lens)
CCT	3000K
CRI	90+



Dimmable


 Cut out : 1²⁶/₃₂"X1²⁶/₃₂" (46X46mm)


Accessories


ACHO-18
honeycomb louver
+PC sheetSG-002
Striped Glass

Accessories are not suitable for wallwash fixtures

STAR-50-STLF





Article number	2218.208A-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	676 (lm)
Beam Angle	20°/25°/35°/50° (Lens)
CCT	3000K
CRI	90+




Dimmable

TRIAC	1-10V
-------	-------



□ 1 5/8" (□ 42mm)
3 3/4" (96mm)

△ Cut out : 1 31/32" X 1 31/32" (50X50mm)

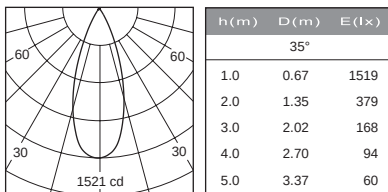

STAR-50-STLA





Article number	2218.209A-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	632 (lm)
Beam Angle	20°/25°/35°/50° (Lens)
CCT	3000K
CRI	90+




Dimmable

TRIAC	1-10V
-------	-------



□ 1 5/8" (□ 42mm)
3 3/4" (96mm)

△ Cut out : 1 31/32" X 1 31/32" (50X50mm)

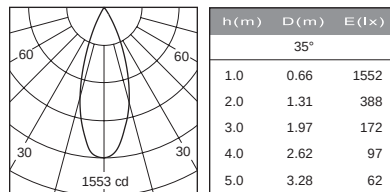

STAR-50-STLW





Article number	2318.204A-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	398 (lm)
Beam Angle	Wallwash (Lens)
CCT	3000K
CRI	90+




Dimmable

TRIAC	1-10V
-------	-------



□ 1 5/8" (□ 42mm)
3 3/4" (96mm)

△ Cut out : 1 31/32" X 1 31/32" (50X50mm)

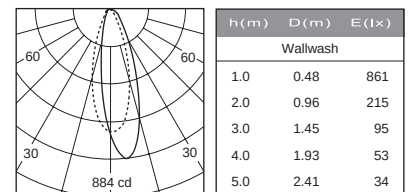

Accessories



ACHO-18
honeycomb louver
+PC sheet



SG-002
Striped Glass

Accessories are not suitable for wallwash fixtures

STAR-1.5" Multiple lights
fixed / adjustable / wallwash




Specification

2700 K, 3000 K, 4000 K,
CRI ≥ 90

TRIAC, 1-10V

Types



Colours

- Bezel : ☒ Black ☐ White
- Baffle : ☒ Black ☐ White

Beam Angle



20°/25°/35°/50° (Lens)



Wallwash (Lens)



STAR-50-2-STF





Article number	2214.413-2-LEA-09B	
	NON-IC	IC
Fixture Consumption	20W	-
Current	500 (mA)	400 (mA)
Delivered Lumen	1441 (lm)	1206 (lm)
Beam Angle	20°/25°/35°/50° (Lens)	
CCT	3000K	
CRI	90+	



Dimmable

TRIAC	1-10V
-------	-------

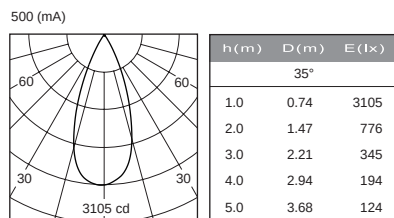
 Cut out : 2¹³/₃₂"x4²⁴/₃₂" (61x121mm)



Accessories

ACHO-18
honeycomb louver
+PC sheetSG-002
Striped GlassS-015
Anti glare ring

STAR-50-2-STA





Article number	2214.410-2-LEA-09B	
	NON-IC	IC
Fixture Consumption	20W	-
Current	500 (mA)	400 (mA)
Delivered Lumen	1369 (lm)	1137 (lm)
Beam Angle	20°/25°/35°/50° (Lens)	
CCT	3000K	
CRI	90+	




Dimmable

TRIAC	1-10V
-------	-------

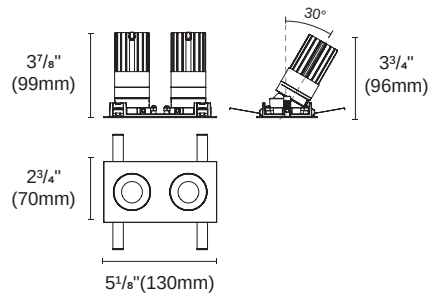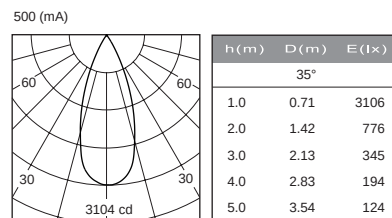
 Cut out : 2¹³/₃₂"x4²⁴/₃₂" (61x121mm)


Accessories

ACHO-18
honeycomb louver
+PC sheetSG-002
Striped Glass

STAR-50-2-STW




Article number	2314.402-2-LEA-09B	
	NON-IC	IC
Fixture Consumption	20W	-
Current	500 (mA)	400 (mA)
Delivered Lumen	398 (lm)X2	- (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	



Dimmable

TRIAC	1-10V
-------	-------




 Cut out : 2¹³/₃₂"x4²⁴/₃₂" (61x121mm)



INSTALLATION OPTIONS



KIG-040-DWJ
Triac/Phase, 0-10V, 1-10V, Potentiometer,
10V PWM 5 in 1 dimming
40W 1~3T
Type: Gear box

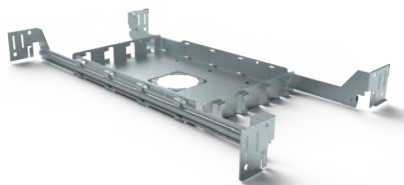
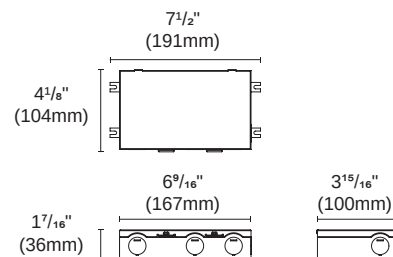


ACCH-13-R45-S46
for STAR50 round / square trim
Type: New construction plate

Cut out:

Round : $\varnothing 1^{26/32}$ " ($\varnothing 46$ mm)

Square : $\square 1^{26/32}$ " ($\square 46$ mm)

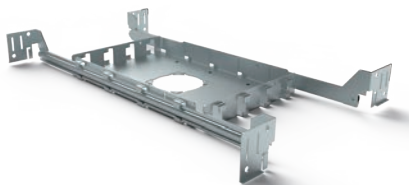



ACCH-13-R54-S50
for STAR50 round / square trimless
Type: New construction plate

Cut out:

Round : $\varnothing 2^{4/32}$ " ($\varnothing 54$ mm)


Square : $\square 1^{31/32}$ " ($\square 50$ mm)



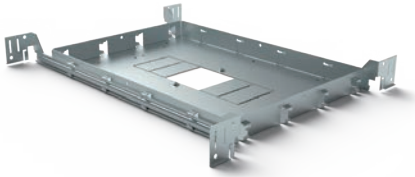

ACCH-12-61X181
for STAR50 Multiple
Type: New construction plate

Cut out:
2 T/TL : $2\frac{13}{32}$ "x $4\frac{24}{32}$ " (61x121mm)




* Cutout accessories are available for
different cutout dimensions




ACCH-12G-61X181
for STAR50 Multiple both trim & trimless
Type: IC Box

Cut out:
2 T/TL : $2\frac{13}{32}$ "x $4\frac{24}{32}$ " (61x121mm)

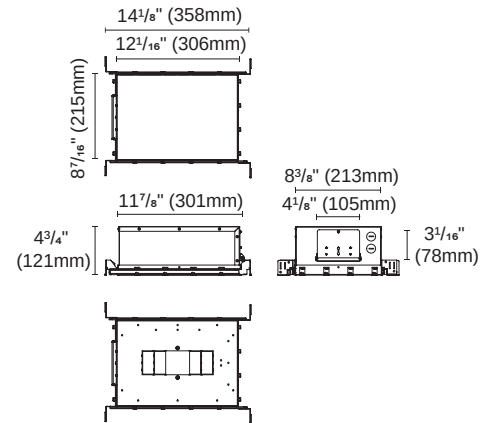

* Cutout accessories are available for
different cutout dimensions

Cutout accessories



ACCI-10-R45-S46
for STAR50 Trim
Cut out:
Round : $\varnothing 1\frac{26}{32}$ " ($\varnothing 46$ mm)
Square : $\square 1\frac{26}{32}$ " ($\square 46$ mm)



ACCI-10-R54-S50
for STAR50 Trimless
Cut out:
Round : $\varnothing 2\frac{4}{32}$ " ($\varnothing 54$ mm)
Square : $\square 1\frac{31}{32}$ " ($\square 50$ mm)



ACCI-10A-R45-S46
for STAR50 Double Trim
Cut out:
Round : $\varnothing 1\frac{26}{32}$ " ($\varnothing 46$ mm)
Square : $\square 1\frac{26}{32}$ " ($\square 46$ mm)



ACCI-10A-R54-S50
for STAR50 Double Trimless
Cut out:
Round : $\varnothing 2\frac{4}{32}$ " ($\varnothing 54$ mm)
Square : $\square 1\frac{31}{32}$ " ($\square 50$ mm)

STARLUX SERIES (AM-C.C.)



STARLUX (AM)

Discover the "Starlux" - The Ultimate Lighting Solution!

- Versatile design
- Easy installation
- Modular and customizable
- Non-glare technology
- Low maintenance
- Transform any space

Upgrade your lighting game with the STARLUX. Experience its versatility, easy installation, and customizable features. Say goodbye to glare and enjoy a low-maintenance lighting solution. Transform your space into a well-lit haven today!
Illuminate your world with the STARLUX.

Shape
(Baffle Size)



Round
1.5"



Square
1.5"



2 lamp
1.5"



3 lamp
1.5"

Mountings



Recessed
Trim



Recessed
Trimless

Light distributions



Adjustable

STARLUX-1.5"


recessed downlights




LEA-09B
10W



LEA-09B-DW
Dim to warm



Flat
Adjustable



Eye
Adjustable

Round

Trim



Trimless



Square

Trim



Trimless



Multiple lights

2 Lamp
Trim



2 Lamp
Trimless



3 Lamp
Trim



3 Lamp
Trimless





STARLUX-1.5"

RISE's STARLUX-1.5" deliver high lumens to your spaces while remaining fully workable from below the ceiling plane.

FEATURES


- STARLUX-1.5" downlight offer a tiny new form element for a minutest downlight artistic.
- Micro trim style is well suited with sheetrock, ACT, wood/ millwork, and many other ceiling materials
- Industry leading luminescence and craftsmanship



Constant current

1 to multiple fixtures

Rise's STARLUX 1.5" are compatible with all common lighting controls; choose from Traic, 0-10V dimming.

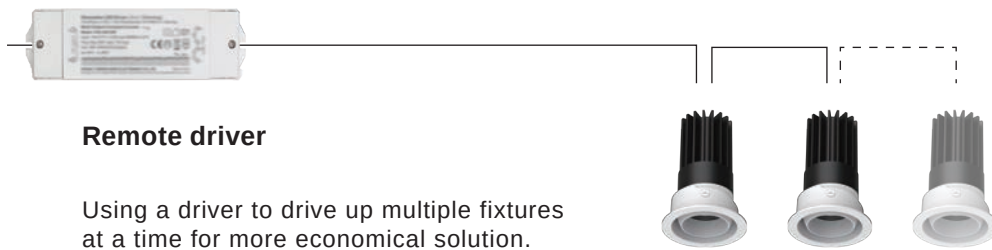


Driver Storage

***Recommended Installation* :**
Drivers can be stored into maintenance hole of the enclosure for easy access.


Size : 20" x 16" x H:3.94"

Max circuit length 1181 $\frac{1}{8}$ "(30M) with wire gauge 12AWG.


Please refer to the last page of the Starlux series catalog to purchase drivers.



NON-IC

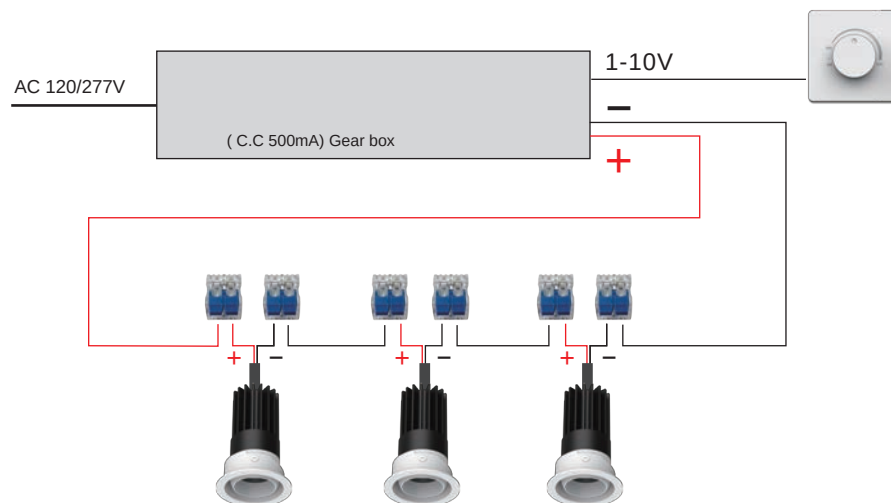

IC-BOX

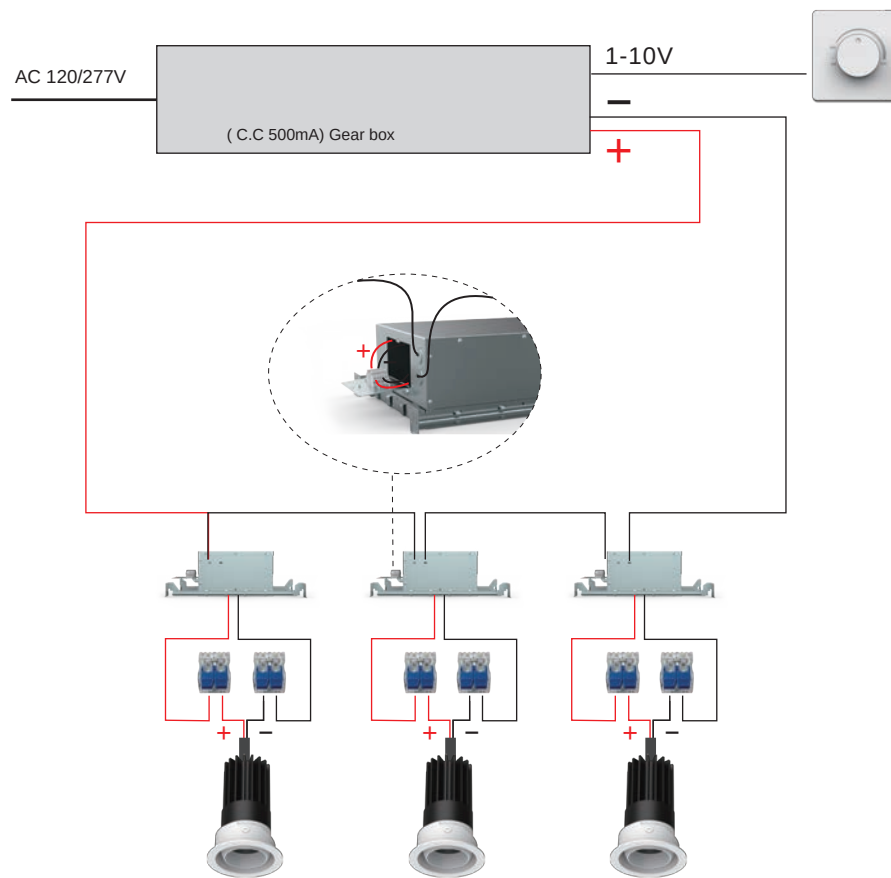

STARLUX-1.5" round
adjustable




Specification

2700 K, 3000 K, 4000 K,
CRI ≥ 90

DALI, TRIAC, 1-10V

Types



Colours

- Bezel :  
Black White
- Baffle :  
Black White

Beam Angle



AT VOI
WE ARE ON A MISSION
TO MAKE OTHER PEOPLE AS PASSIONATE
ABOUT GREAT ARTISAN COFFEE
AS WE ARE

IONATE




STARLUX-FLAT-RTA




Article number	2218.510-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	774 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable



Cut out : 2 1/32" (54mm)

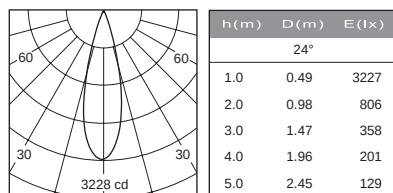


STARLUX-EYE-RTA




Article number	2218.511-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable



Cut out : 2 1/32" (54mm)

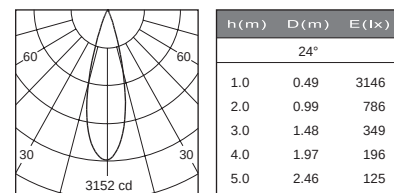

Accessories

ACHO-18
honeycomb louver
+PC sheetSG-002
Striped Glass


STARLUX-FLAT-RTLA




Article number	2218.240F-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	774 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable

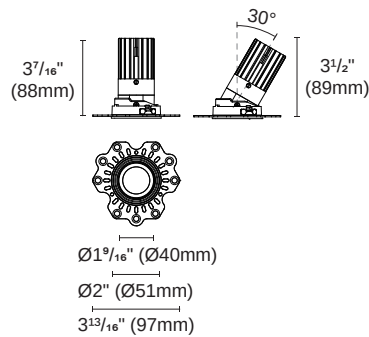

Ⓢ Cut out : 2 12/32" (60mm)

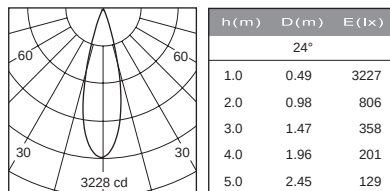


STARLUX-EYE-RTLA




Article number	2218.241F-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable

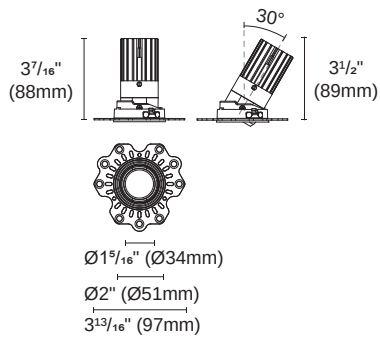

Ⓢ Cut out : 2 12/32" (60mm)

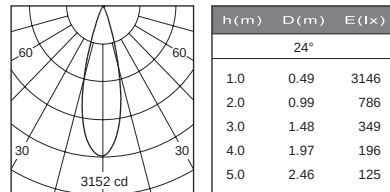

Accessories

ACHO-18
honeycomb louver
+PC sheetSG-002
Striped Glass

STARLUX-1.5" Multiple lights
adjustable



Specification

2700 K, 3000 K, 4000 K,
CRI ≥ 90

DALI, TRIAC, 1-10V

Types

	1 lamp	2 lamp	3 lamp
Trim			
	□2.76" (□70mm)	5.28" (134mm)	7.6" (193mm)

Colours

Bezel :		
	Black	White
Baffle :		
	Black	White

Beam Angle




15°/24°/36°/50° (Lens)



Ближе к
Пуща. Речу



STARLUX-FLAT-STA

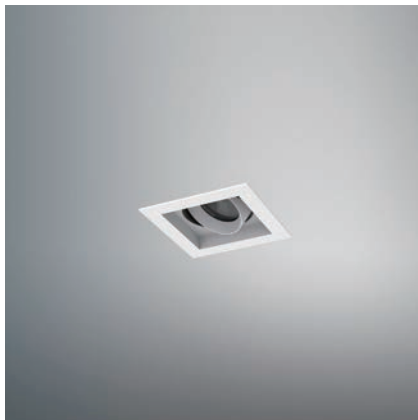

Article number	2214.411-1-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	711 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable

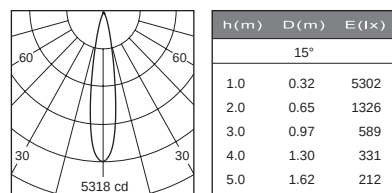
 Cut out : 2¹³/₃₂"x2¹³/₃₂" (61x61mm)


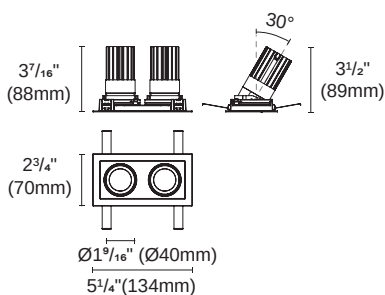
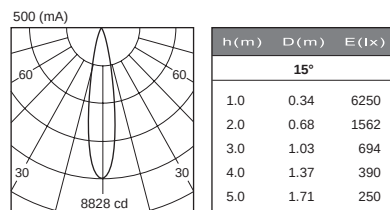
STARLUX-FLAT-2-STA



Article number	2214.411-2-LEA-09B
	NON-IC IC
Fixture Consumption	20W -
Current	500 (mA) 400 (mA)
Delivered Lumen	711 (lm) X2 623 (lm)X2
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+




Dimmable


 Cut out : 2¹³/₃₂"x4³/₄" (61x121mm)


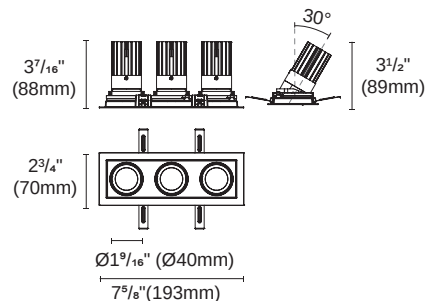
STARLUX-FLAT-3-STA



Article number	2214.411-3-LEA-09B
	NON-IC IC
Fixture Consumption	30W 22W
Current	500 (mA) 400 (mA)
Delivered Lumen	711 (lm) X3 623 (lm)X3
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable


 Cut out : 2¹³/₃₂"x7¹/₈" (61x181mm)


Accessories

ACHO-18
honeycomb louver
+PC sheetSG-002
Striped Glass



STARLUX-EYE-STA



Article number	2214.412-1-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	757 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+




Dimmable

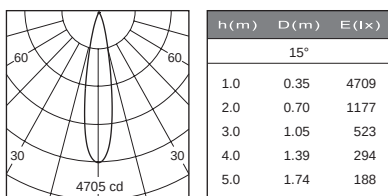
 Cut out : 2¹³/₃₂"x2¹³/₃₂" (61x61mm)


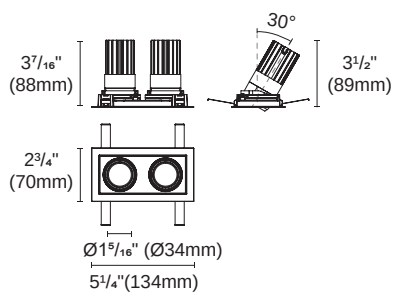
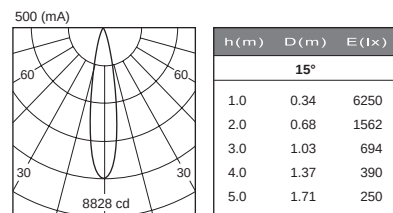
STARLUX-EYE-2-STA



Article number	2214.412-2-LEA-09B
	NON-IC IC
Fixture Consumption	20W -
Current	500 (mA) 400 (mA)
Delivered Lumen	757 (lm)X2 603 (lm)X2
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+




Dimmable


 Cut out : 2¹³/₃₂"x4³/₄" (61x121mm)


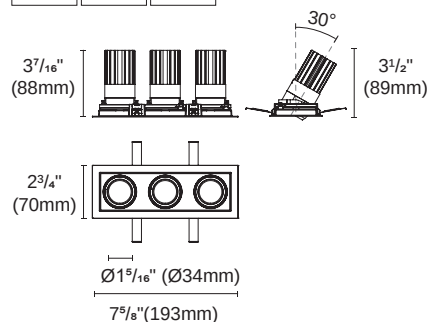
STARLUX-EYE-3-STA



Article number	2214.412-3-LEA-09B
	NON-IC IC
Fixture Consumption	30W 22W
Current	500 (mA) 400 (mA)
Delivered Lumen	757 (lm)X3 603 (lm)X3
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable


 Cut out : 2¹³/₃₂"x7¹/₈" (61x181mm)

Accessories

ACHO-18
honeycomb louver
+PC sheetSG-002
Striped Glass



STARLUX-FLAT-STLA



Article number	2314.400-1-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	711 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable

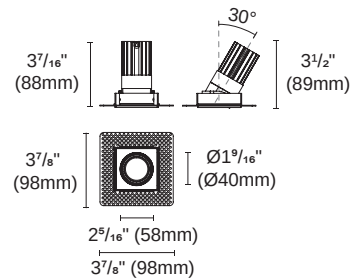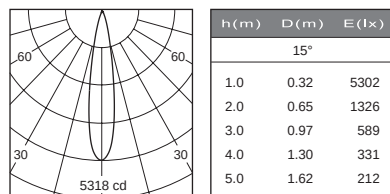
 Cut out : 2¹³/₃₂"x2¹³/₃₂" (61x61mm)


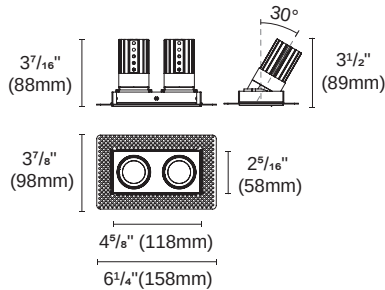
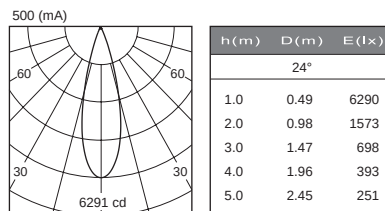
STARLUX-FLAT-2-STLA



Article number	2314.400-2-LEA-09B
	NON-IC IC
Fixture Consumption	20W -
Current	500 (mA) 400 (mA)
Delivered Lumen	711 (lm) X2 623 (lm)X2
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+




Dimmable


 Cut out : 2¹³/₃₂"x4²⁴/₃₂" (61x121mm)


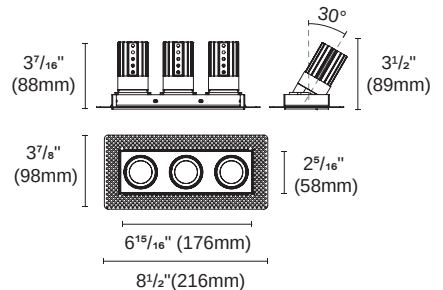
STARLUX-FLAT-3-STLA



Article number	2314.400-3-LEA-09B
	NON-IC IC
Fixture Consumption	30W 22W
Current	500 (mA) 400 (mA)
Delivered Lumen	711 (lm) X3 623 (lm)X3
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable


 Cut out : 2¹³/₃₂"x7⁴/₃₂" (61x181mm)


Accessories

ACHO-18
honeycomb louver
+PC sheetSG-002
Striped Glass


STARLUX-EYE-STLA




Article number	2314.401-1-LEA-09B
Fixture Consumption	10W
Current	500 (mA)
Delivered Lumen	757 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable




Cut out : 2¹³/₃₂"x2¹³/₃₂" (61x61mm)

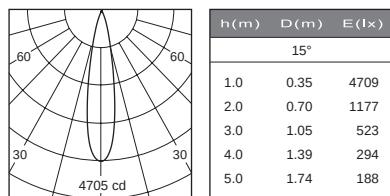


STARLUX-EYE-2-STLA




Article number	2314.401-2-LEA-09B
	NON-IC IC
Fixture Consumption	20W -
Current	500 (mA) 400 (mA)
Delivered Lumen	757 (lm)X2 603 (lm)X2
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable

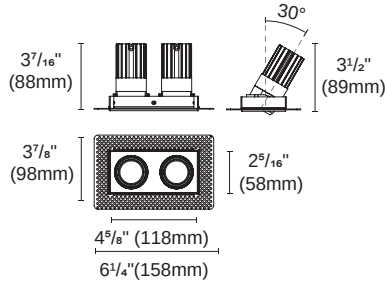


Cut out : 2¹³/₃₂"x4²⁴/₃₂" (61x121mm)

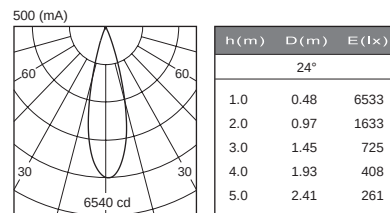



STARLUX-EYE-3-STLA



Article number	2314.401-3-LEA-09B
	NON-IC IC
Fixture Consumption	30W 22W
Current	500 (mA) 400 (mA)
Delivered Lumen	757 (lm)X3 603 (lm)X3
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable

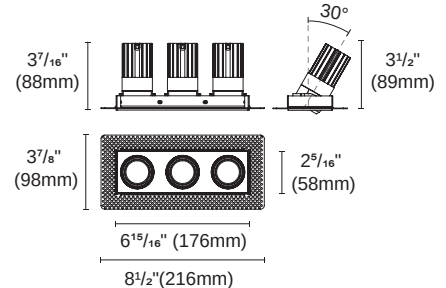

Cut out : 2¹³/₃₂"x7⁴/₃₂" (61x181mm)

Accessories



ACHO-18
honeycomb louver
+PC sheet





SG-002
Striped Glass

INSTALLATION OPTIONS




KIG-040-DWJ
Triac/Phase , 0-10V , 1-10V , Potentiometer ,
10V PWM 5 in 1 dimming
40W , 1-3T
Type: Gear box

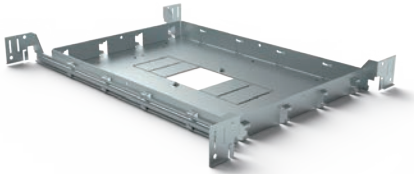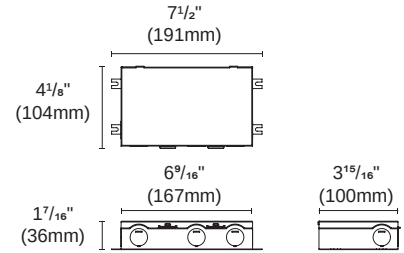

ACCH-12-61X181
for STARLUX Multiple both trim & trimless
Type: New construction plate

Cut out:

- 1 T/TL : 2¹³/₃₂"x2¹³/₃₂" (61x61mm)
- 2 T/TL : 2¹³/₃₂"x4²⁴/₃₂"(61x121mm)
- 3 T/TL : 2¹³/₃₂"x7⁴/₃₂" (61x181mm)




* Cutout accessories are available for different cutout dimensions



ACCH-12G-61X181
for STARLUX Multiple both trim & trimless
Type: IC Box


Cut out:

- 1 T/TL : 2¹³/₃₂"x2¹³/₃₂" (61x61mm)
- 2 T/TL : 2¹³/₃₂"x4²⁴/₃₂" (61x121mm)

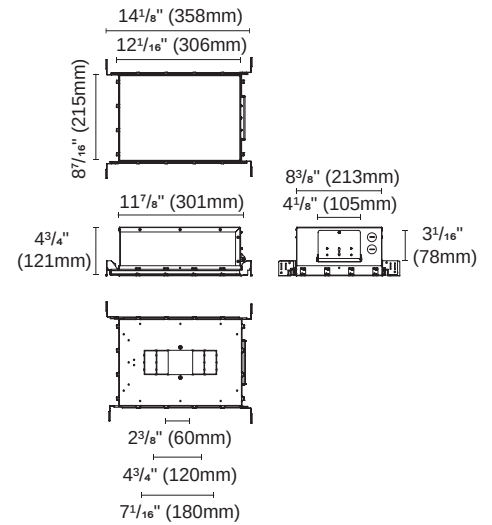

* Cutout accessories are available for different cutout dimensions

Cutout accessories



ACCI-10-R54-R60 for STARLUX round


Cut out:

- Trim : 2⁴/₃₂" (54mm)
- Trimless : 2¹²/₃₂" (60mm)



ACCH-3B-61X181
for STARLUX Multiple both trim & trimless
Type: IC Box

Cut out:
3 T/TL : $2\frac{13}{32}$ "x $7\frac{1}{8}$ " (61x181mm)

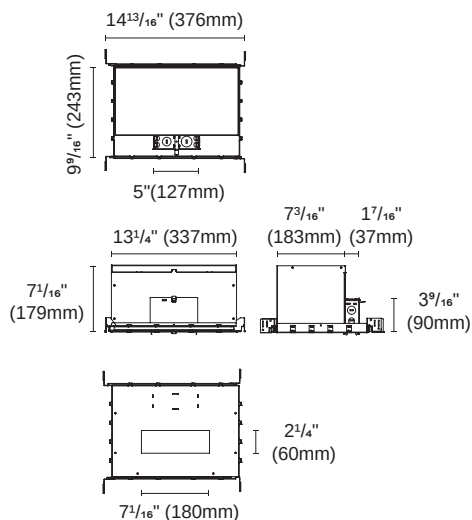

Optional driver available



KIG-040-DW
Type: Driver

Triac / 0-10V/1-10V/Potentiometer/10V
PWM 5 in 1 Dimmable LED driver
Multi-current output series 40W
For 1~3T



PUP10A-1WMC-700
Type: Driver

0/1-10V
Output: 500mA/2-20V/10W
400mA/2-21V/8.4W
For 1T



PUP20A-1WMC
Type: Driver

0/1-10V
Output: 500mA/9-40V/20W
400mA/9-45V/18W
For 1~2T



PUP10T-1LMC-700
Type: Driver

Triac
Output: 500mA/2-20VDC/10W
400mA/2-21VDC/8.4W
For 1T



PUP20T-1LMC
Type: Driver

Triac
Output: 500mA/9-40V/20W
400mA/9-45V/18W
For 1~2T



PUP10D-1WMC-700
Type: Driver

Dali
Output: 500mA/2-20V/10W
400mA/2-21V/8.4W
For 1T



PUP20D-1WMC
Type: Driver

Dali
Output: 500mA/9-40V/20W
400mA/9-45V/18W
For 1~2T



ACOT-106
Type: Quick connector

EPIC SERIES (AM)



EPIC (AM)

Designed base on the concept of "light engine modularization", making EPIC series possible to be more flexible, more practical and expandable.

The features are as follows:

- * Modularized design—easy maintenance & replacement
- * Maximize common components to reduce stock cost
- * Speed up the progress of new series development in the future
- * Interchangeable design to increase product flexibility
- * Set up design norms by modularization, minimize possible faults

Shape
(Baffle size)



Round
2"



Round
2.8"



Round
3.5"



Round
4.5"



Square
2"



Square
2.8"



Square
3.5"



Square
4.5"

Mountings



Recessed
Trim



Recessed
Trimless



Millwork

Light distributions



Fixed



Adjustable



Wallwash

EPIC
recessed downlights



LEA-13



LEA-14



LEA-14-DW
Dim To Warm
(ETL pending)

	65 Fixed	65 Adjustable	85 Fixed	85 Adjustable	85 Wallwash
Round					
Trim					
Trimless					
Millwork					
Square					
Trim					
Trimless					
Millwork					



LEA-15



LEA-15-DW
Dim To Warm



ACOT-84-AM



ACOT-73-AM

	110 Fixed	110 Adjustable	110 Wallwash	135 Fixed	135 Adjustable	135 Wallwash
Round						
Trim						
Trimless						
Millwork						
Square						
Trim						
Trimless						
Millwork						


EPIC (AM)





Light distributions

Three light patterns to meet all the essential functions of your lighting concept Vertical lighting is provided by downlights with different beam angles; wall-wash and floor-mounted optics provide a wide range of wall and floor lighting; adjustable spotlight settings . If the functional area changes, the optics in the luminaire housing can be easily replaced without tools.

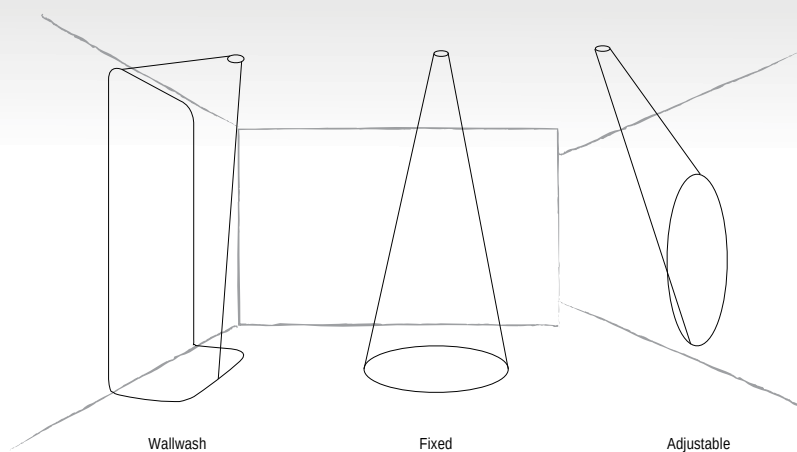

Easy installation

Easy to replace, quick to assemble and completely tool-free.





Colorful



Baffle :




Bezel :





Low glare baffle

Design with 30° cut-off angle, this series ensures the low glare function that able to create a soft visual effect.

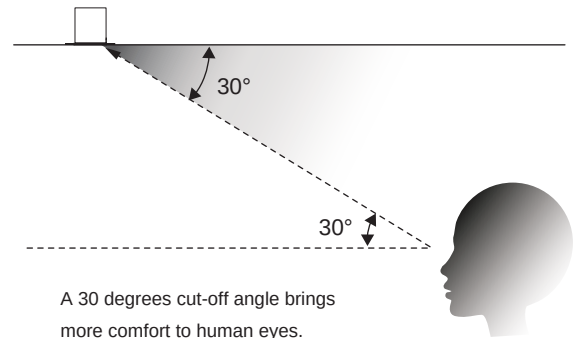


Adding an extra component to the fixture prevent people seeing through the fixture a very tender thought from our designer

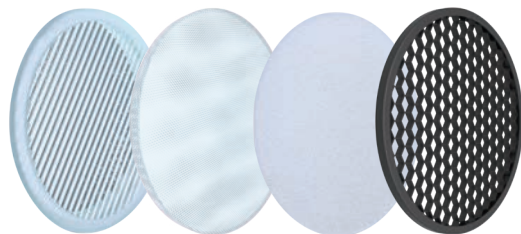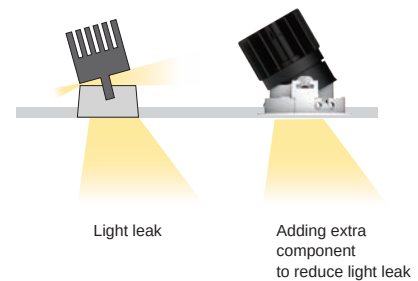

Striped glass Woven glass Diffusion sheet Honeycomb louver

With more options to the accessories, EPIC adds more flexibility and freedom for the lighting designer. Honeycomb reduces glare; strip glass creates oval distribution; diffusion sheet & woven glass soften and even spread the light.


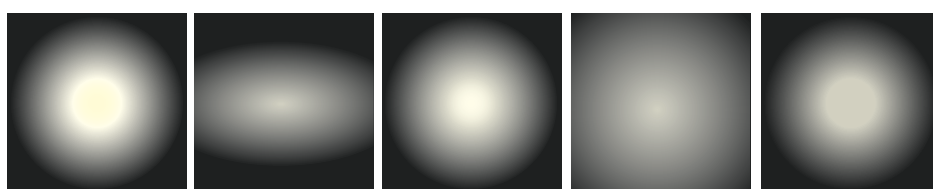


Lens (no accessory) Striped glass Woven glass Diffusion sheet Honeycomb louver



Wallwash

EPIC a wallwash enables even illumination on the target wall without shadows. It supplies an overall effect that is clean and elegant. Generally speaking, the distance between the lighting fixture and the height of the illuminated wall ranges from 1/3 to 1/5. This wallwash function; not only broadens the illumination effect with smooth lights performance but also makes the entire area feels brighter. When combining with other function fixtures together, it can form a fusion of beauty.

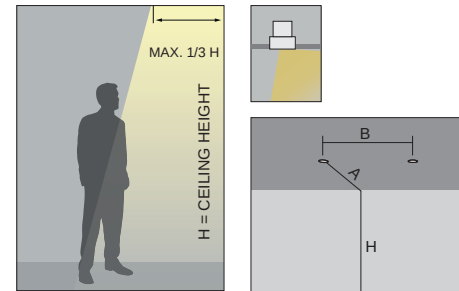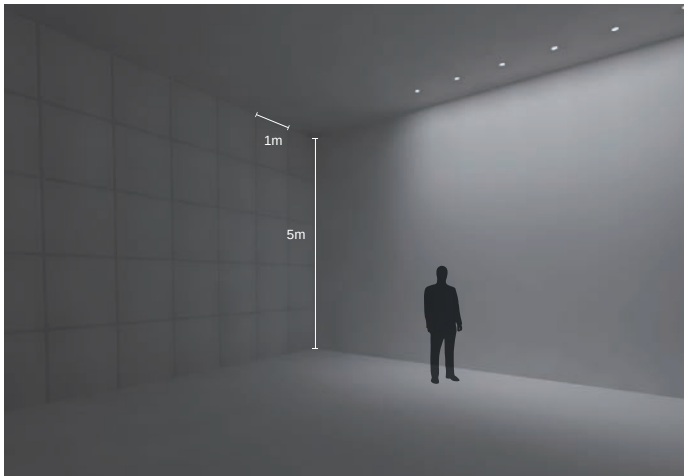

RECOMMENDED DISTANCES (Meter)	EPIC 2.8"	A : H : B	0.75 : 3 : 0.75 (m)
	EPIC 3.5"	A : H : B	0.75 : 5 : 0.75 (m)
	EPIC 4.5"	A : H : B	0.75 : 5 : 0.75 (m)




Dim to Warm 1800-3000K (for EPIC 110)

This light engine features Dim to Warm, the ultimate in dimming comfort, where the light changes its colour temperature according to the dimming curve; the darker the light, the warmer the light. Like a sunset effect, the gradual change replicates the transition from a comfortable ambience to a relaxing and soothing environment.

Dim to Warm is the term used to describe the function of LEDs to reduce the colour temperature (CCT) of the light as it dims, from 3000K at 100% to 1800K at nearly 0%.

The light provides a relaxing ambience for a typical evening dining experience, reading in bed, a moody hotel lobby or bar environment. By moving from dim to warm, we provide a light source that is alert and bright when cooking or working, then dimmed to provide a warm ambience for hosting and relaxing in the evening.

EPIC 65/85/110/135
recessed downlights

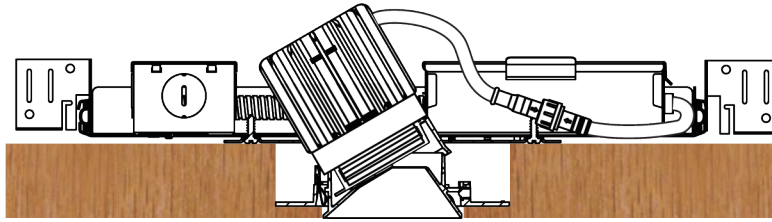

Wood Ceiling Style












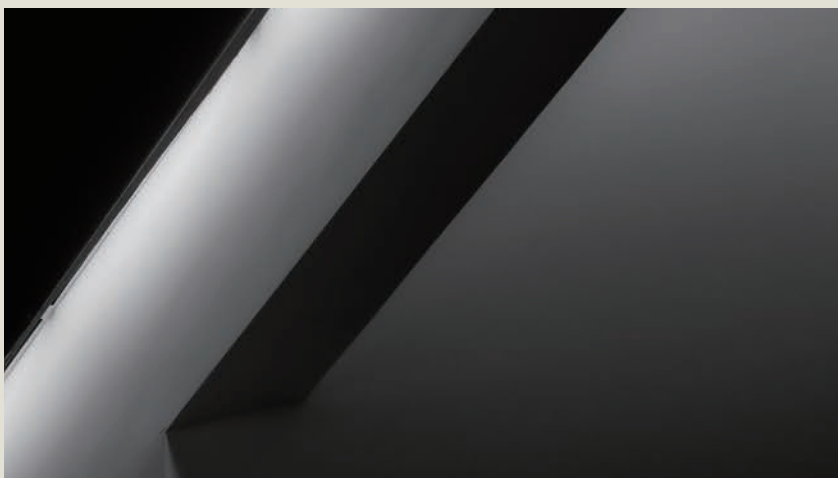

EPIC-65

2"

Round / Square

Fixed
Adjustable



EPIC-65-RTF



Article number	2118.137-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	766 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable

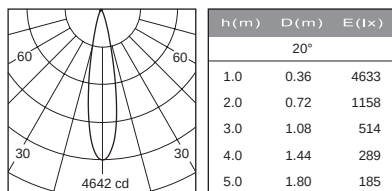
 Cut out : 2¹²/₃₂" (60mm)



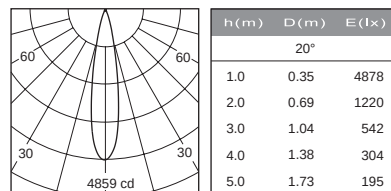
EPIC-65-RTA




Article number	2118.138-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	767 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable


 Cut out : 2¹²/₃₂" (60mm)


Accessories

ACSG-5
Striped glassACHO-6
Honeycomb louverACDS-3
Diffusion sheetACWG-6
Woven glassACOT-107
Suction cup


EPIC-65-RTL




Article number	2118.237F-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	766 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable



Cut out : 2 12/32" (60mm)

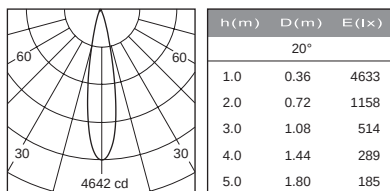



EPIC-65-RTLA




Article number	2118.238F-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	767 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable



Cut out : 2 12/32" (60mm)

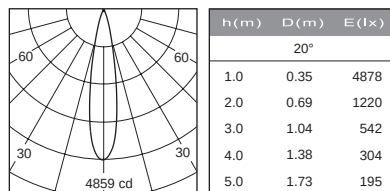

Accessories

ACSG-5
Striped glassACHO-6
Honeycomb louverACDS-3
Diffusion sheetACWG-6
Woven glassACOT-107
Suction cup



EPIC-65-STF




Article number	2118.140-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	796 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable




Cut out : 2 12/32"X2 12/32" (60X60mm)



h (m)	D (m)	E (lx)
20°		
1.0	0.35	4705
2.0	0.70	1176
3.0	1.05	522
4.0	1.39	294
5.0	1.74	188



EPIC-65-STA

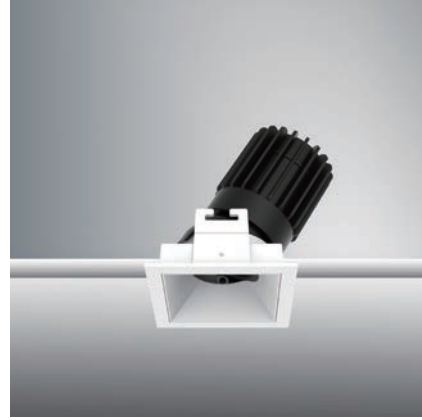


Article number	2118.141-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	755 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable




Cut out : 2 12/32"X2 12/32" (60X60mm)




h (m)	D (m)	E (lx)
20°		
1.0	0.35	4619
2.0	0.69	1155
3.0	1.04	513
4.0	1.38	288
5.0	1.73	184

Accessories

ACSG-5
Striped glassACHO-6
Honeycomb louverACDS-3
Diffusion sheetACWG-6
Woven glassACOT-107
Suction cup



EPIC-65-STLF

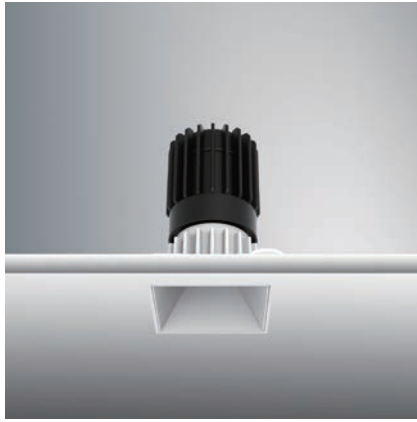

Article number	2118.240A-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	796 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable

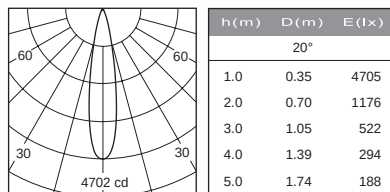
 Cut out : 2¹²/₃₂"X2¹²/₃₂" (60X60mm)


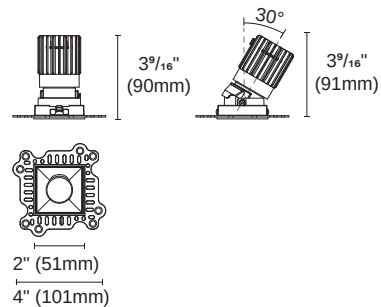
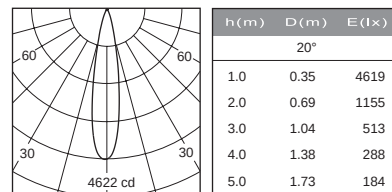
EPIC-65-STLA




Article number	2118.241A-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	755 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable


 Cut out : 2¹²/₃₂"X2¹²/₃₂" (60X60mm)


Accessories

ACSG-5
Striped glassACHO-6
Honeycomb louverACDS-3
Diffusion sheetACWG-6
Woven glassACOT-107
Suction cup



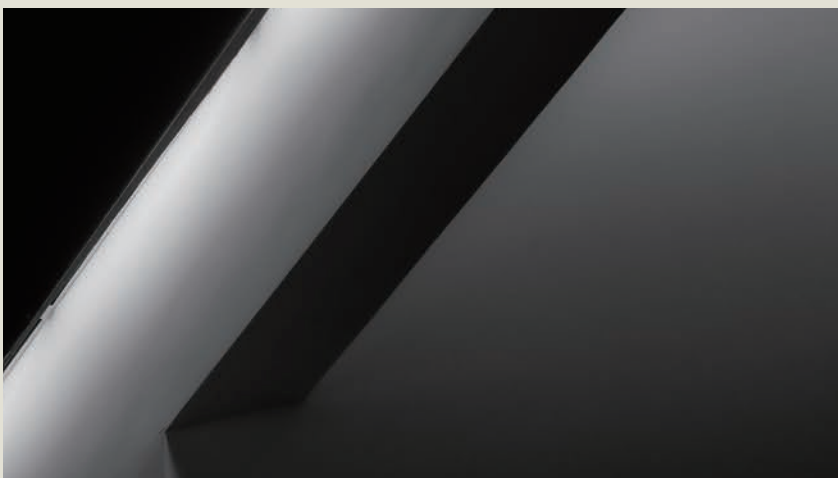

EPIC-85

2.8"


Round / Square

Fixed
Adjustable
Wallwash


EPIC-85-RTF




Article number	2118.125-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1362 (lm)	1231 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable



Cut out : 3 5/32" (80mm)

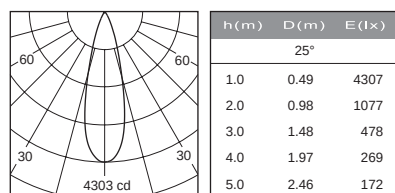


EPIC-85-RTA




Article number	2118.126-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1350 (lm)	1196 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable




Cut out : 3 5/32" (80mm)

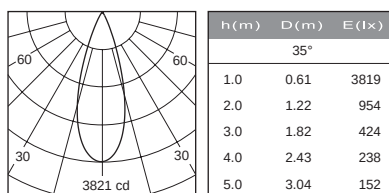


EPIC-85-RTW




Article number	2118.127-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	853 (lm)	850 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable



Cut out : 3 5/32" (80mm)

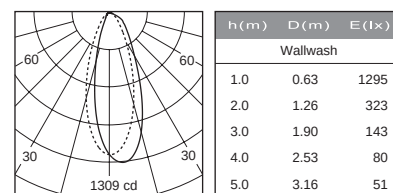


Accessories


ACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glassACOT-108
Suction cup

Accessories are not suitable for wallwash fixtures



EPIC-85-RTLFL

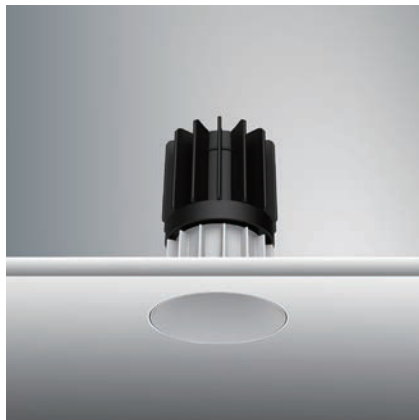


Article number	2118.225F-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1362 (lm)	1231 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable



Cut out : 3 5/32" (80mm)

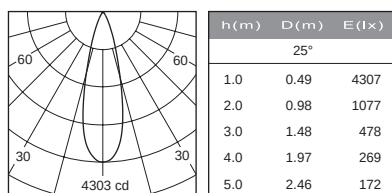



EPIC-85-RTLA




Article number	2118.226F-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1350 (lm)	1196 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	




Dimmable




Cut out : 3 5/32" (80mm)

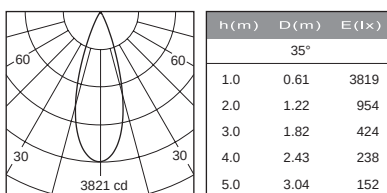


EPIC-85-RTLW

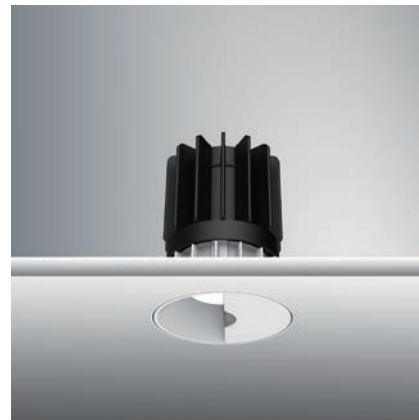


Article number	2118.227F-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	853 (lm)	850 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable



Cut out : 3 5/32" (80mm)

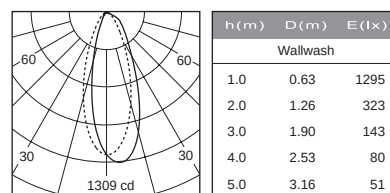

Accessories

ACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glassACOT-108
Suction cupEP85-TL-WD
Millwork

Accessories are not suitable for wallwash fixtures




EPIC-85-STF



Article number	2118.128-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1374 (lm)	1235 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable

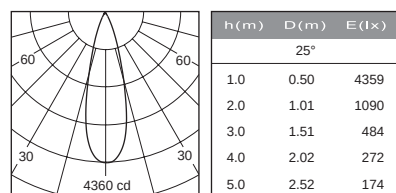
 Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)




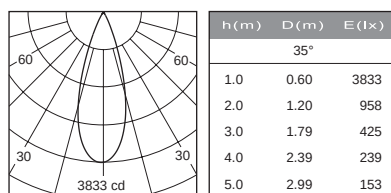
EPIC-85-STA



Article number	2118.129-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1357 (lm)	1216 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	




Dimmable


 Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)




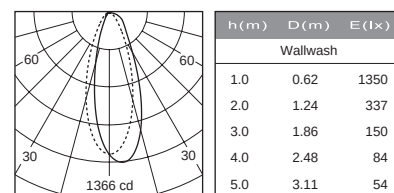
EPIC-85-STW



Article number	2118.130-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	867 (lm)	839 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable


 Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)


Accessories

ACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glassACOT-108
Suction cup

Accessories are not suitable for wallwash fixtures



EPIC-85-STLF



Article number	2118.228A-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1374 (lm)	1235 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable

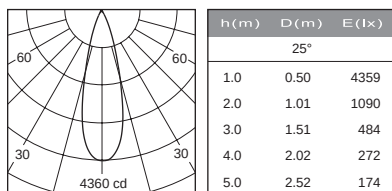Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)



EPIC-85-STLA



Article number	2118.229A-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1357 (lm)	1216 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	




Dimmable

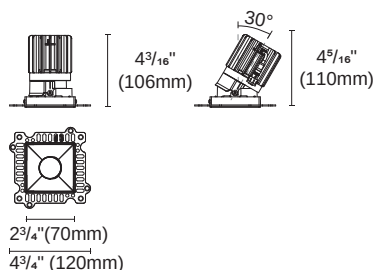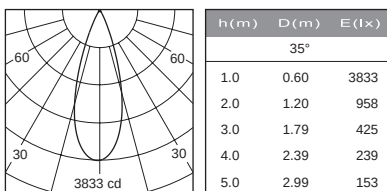Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)



EPIC-85-STLW



Article number	2118.230A-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	867 (lm)	839 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable

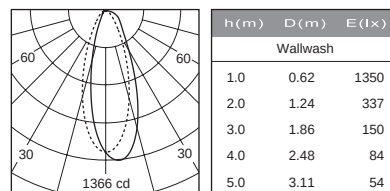
Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)

Accessories

ACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glassACOT-108
Suction cupEP85-TL-WD
Millwork

Accessories are not suitable for wallwash fixtures



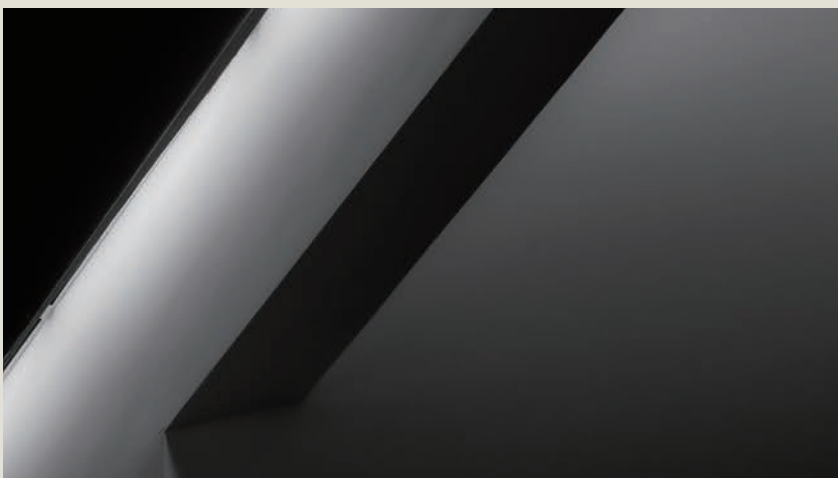

EPIC-110 ▶

3.5"


Round / Square

Fixed
Adjustable
Wallwash


EPIC-110-RTF1



Article number	2018.481-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1697 (lm)
Beam Angle	20°/30°/45°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2018.481-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1200 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable


 Cut out : 3³⁰/₃₂" (100mm)



EPIC-110-RTA1



Article number	2018.494-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1702 (lm)
Beam Angle	20°/30°/45°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2018.494-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1190 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC




Dimmable


 Cut out : 3³⁰/₃₂" (100mm)


EPIC-110-RTW1



Article number	2018.482-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1100 (lm)
Beam Angle	Wallwash (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2018.482-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	713 (lm)
Beam Angle	Wallwash (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable



 Cut out : 3³⁰/₃₂" (100mm)

Accessories


SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cup

Accessories are not suitable for wallwash fixtures


EPIC-110-RTL1

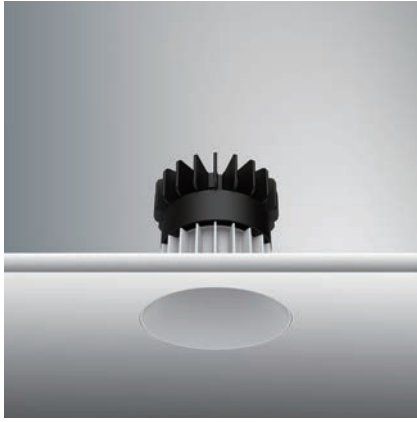

Article number	2018.275F-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1697 (lm)
Beam Angle	20°/30°/45°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2018.275F-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1200 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable



Ⓢ Cut out : 3³⁰/₃₂" (100mm)



EPIC-110-RTLA1



Article number	2018.294F-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1702 (lm)
Beam Angle	20°/30°/45°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2018.294F-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1190 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable




Ⓢ Cut out : 3³⁰/₃₂" (100mm)


EPIC-110-RTLW1



Article number	2018.276F-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1100 (lm)
Beam Angle	Wallwash (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2018.276F-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	713 (lm)
Beam Angle	Wallwash (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable



Ⓢ Cut out : 3³⁰/₃₂" (100mm)

Accessories


SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cupEP110-TL-WD
Millwork

Accessories are not suitable for wallwash fixtures


EPIC-110-STF1



Article number	2018.483-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1639 (lm)
Beam Angle	20°/30°/45°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2018.483-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1212 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable


 Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)



EPIC-110-STA1



Article number	2018.495-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1616 (lm)
Beam Angle	20°/30°/45°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2018.495-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1227 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable


 Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)


EPIC-110-STW1



Article number	2018.484-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1062 (lm)
Beam Angle	Wallwash (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2018.484-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	740 (lm)
Beam Angle	Wallwash (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable



 Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cup


Accessories are not suitable for wallwash fixtures

EPIC-110-STLF1

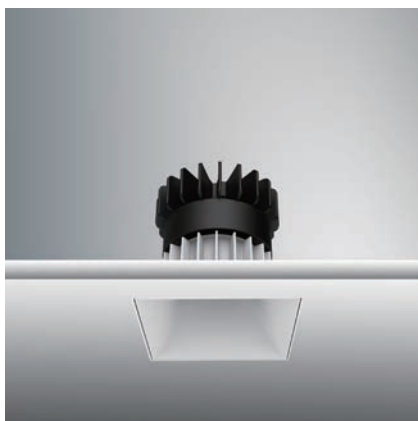


Article number	2018.277A-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1639 (lm)
Beam Angle	20°/30°/45°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.277A-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1212 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable


 Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

EPIC-110-STLA1





Article number	2018.295A-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1616 (lm)
Beam Angle	20°/30°/45°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.295A-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1227 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable


 Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

EPIC-110-STLW1




Article number	2018.278A-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1062 (lm)
Beam Angle	Wallwash (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.278A-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	740 (lm)
Beam Angle	Wallwash (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable


 Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cupEP110-TL-WD
Millwork

Accessories are not suitable for wallwash fixtures



EPIC-110-RTF



Article number	2018.481-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2263 (lm)	1846 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable

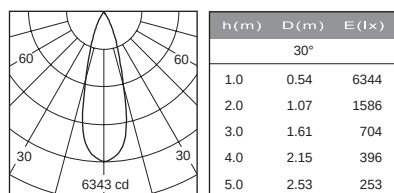Cut out : 3³⁰/₃₂" (100mm)



EPIC-110-RTA



Article number	2018.494-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2235 (lm)	1871 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	




Dimmable

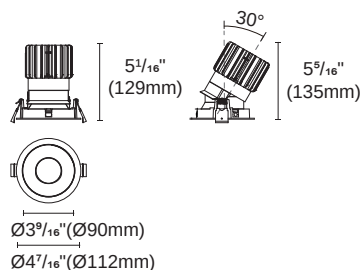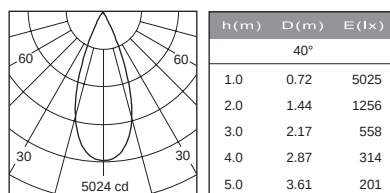Cut out : 3³⁰/₃₂" (100mm)



EPIC-110-RTW



Article number	2018.482-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1497 (lm)	1184 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable

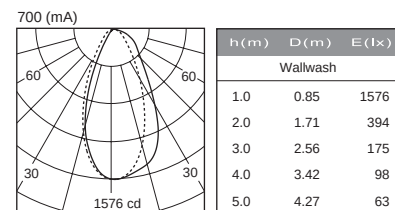Cut out : 3³⁰/₃₂" (100mm)

Accessories


SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cup

Accessories are not suitable for wallwash fixtures



EPIC-110-RTL F



Article number	2018.275F-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2263 (lm)	1846 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable

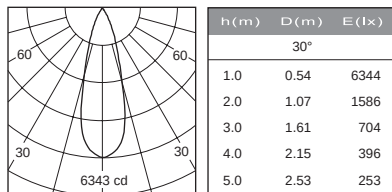Cut out : 3³⁰/₃₂" (100mm)



EPIC-110-RTL A




Article number	2018.294F-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2235 (lm)	1871 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable

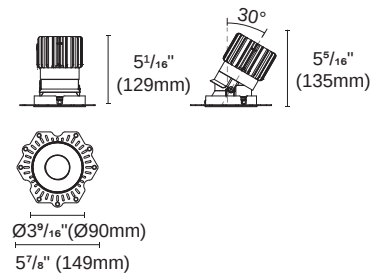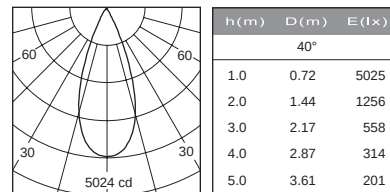Cut out : 3³⁰/₃₂" (100mm)



EPIC-110-RTL W

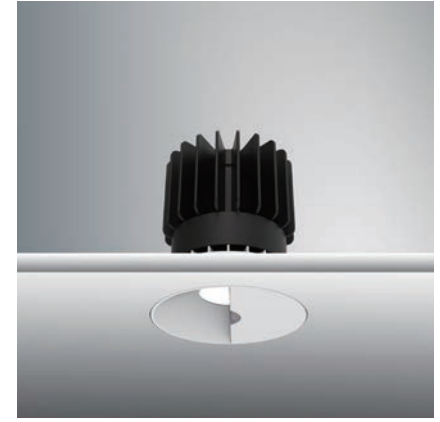

Article number	2018.276F-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1497 (lm)	1184 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable

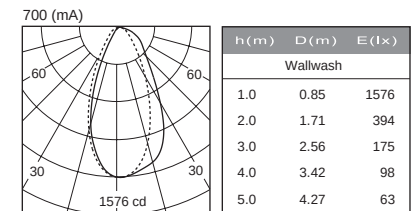Cut out : 3³⁰/₃₂" (100mm)

Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cupEP110-TL-WD
Millwork

Accessories are not suitable for wallwash fixtures



EPIC-110-STF



Article number	2018.483-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2307 (lm)	1852 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable

Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

	30°		
	h(m)	D(m)	E(lx)
1.0	0.54	6481	
2.0	1.08	1620	
3.0	1.62	720	
4.0	2.16	405	
5.0	2.70	259	



EPIC-110-STA



Article number	2018.495-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2250 (lm)	1877 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable

Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

	40°		
	h(m)	D(m)	E(lx)
1.0	0.72	5017	
2.0	1.45	1254	
3.0	2.17	557	
4.0	2.89	313	
5.0	3.62	200	



EPIC-110-STW



Article number	2018.484-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1500 (lm)	1172 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable

Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)


	Wallwash		
	h(m)	D(m)	E(lx)
1.0	0.85	1600	
2.0	1.70	400	
3.0	2.55	177	
4.0	3.40	99	
5.0	4.25	63	

Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cup

Accessories are not suitable for wallwash fixtures


EPIC-110-STLF

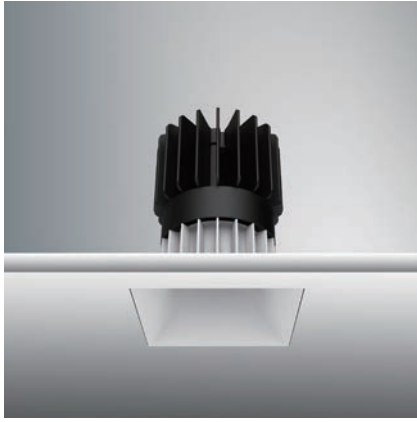


Article number	2018.277A-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2307 (lm)	1852 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable



Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

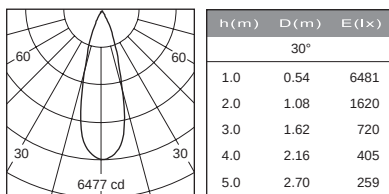



EPIC-110-STLA




Article number	2018.295A-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2250 (lm)	1877 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable




Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

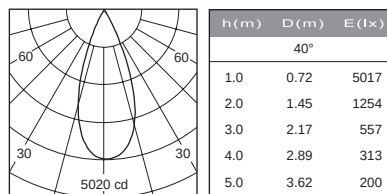


EPIC-110-STLW




Article number	2018.278A-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1500 (lm)	1172 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable



Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)




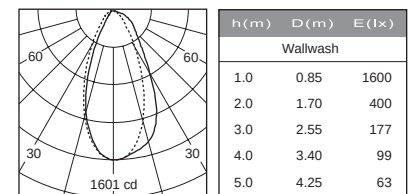


Accessories





SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cupEP110-TL-WD
Millwork

Accessories are not suitable for wallwash fixtures





2018.481-LEA-15
2018.275F-LEA-15

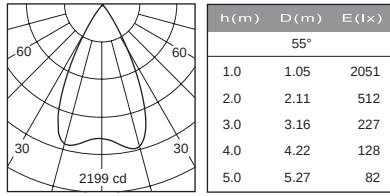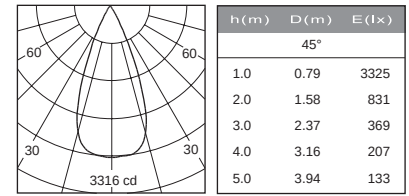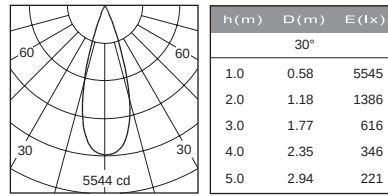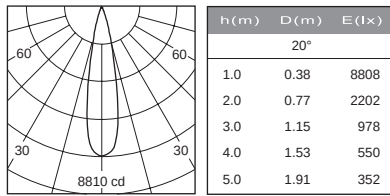





2018.481-LEA15DW
2018.275F-LEA15DW

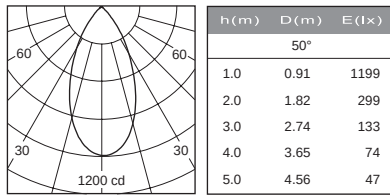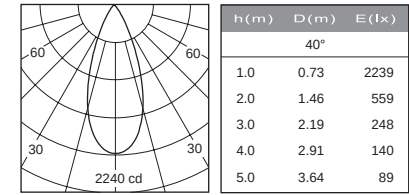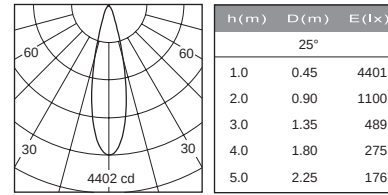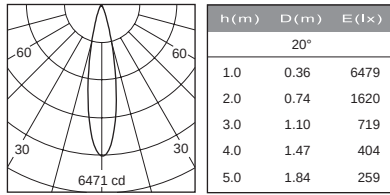


2018.494-LEA-15
2018.294F-LEA-15

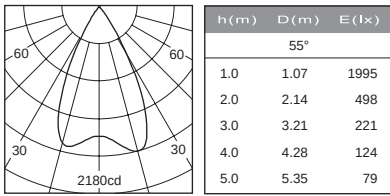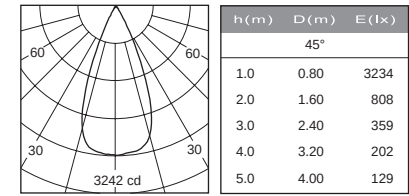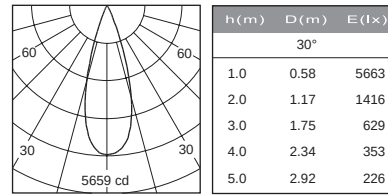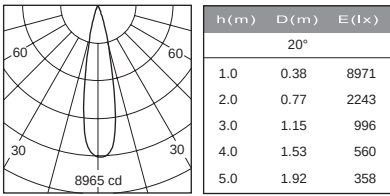

2018.494-LEA15DW
2018.294F-LEA15DW

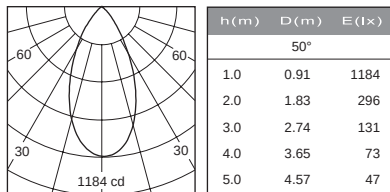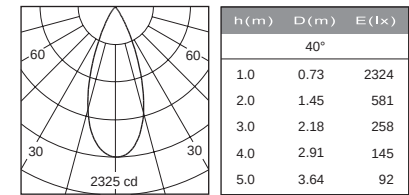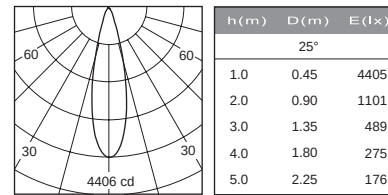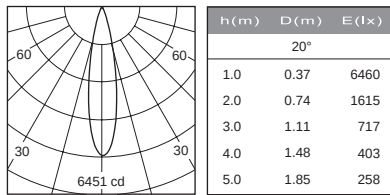


2018.482-LEA-15
2018.276F-LEA-15




h (m)	D (m)	E (lx)
Wallwash		
1.0	0.77	1360
2.0	1.54	340
3.0	2.32	151
4.0	3.09	85
5.0	3.86	54

2018.482-LEA15DW
2018.276F-LEA15DW




h (m)	D (m)	E (lx)
Wallwash		
1.0	0.80	811
2.0	1.60	202
3.0	2.40	90
4.0	3.21	50
5.0	4.01	32


2018.483-LEA-15
2018.277A-LEA-15




h (m)	D (m)	E (lx)
20°		
1.0	0.38	8437
2.0	0.77	2109
3.0	1.15	937
4.0	1.54	527
5.0	1.92	337



h (m)	D (m)	E (lx)
30°		
1.0	0.59	5246
2.0	1.17	1312
3.0	1.76	582
4.0	2.34	327
5.0	2.93	209




h (m)	D (m)	E (lx)
45°		
1.0	0.82	2999
2.0	1.63	749
3.0	2.45	333
4.0	3.26	187
5.0	4.08	120




h (m)	D (m)	E (lx)
55°		
1.0	1.06	2014
2.0	2.12	503
3.0	3.18	223
4.0	4.25	125
5.0	5.31	80


2018.483-LEA15DW
2018.277A-LEA15DW




h (m)	D (m)	E (lx)
20°		
1.0	0.37	6596
2.0	0.74	1649
3.0	1.10	732
4.0	1.47	412
5.0	1.84	263



h (m)	D (m)	E (lx)
25°		
1.0	0.45	4486
2.0	0.90	1121
3.0	1.35	498
4.0	1.80	280
5.0	2.25	179




h (m)	D (m)	E (lx)
40°		
1.0	0.72	2359
2.0	1.44	589
3.0	2.15	262
4.0	2.87	147
5.0	3.59	94




h (m)	D (m)	E (lx)
50°		
1.0	0.89	1273
2.0	1.77	318
3.0	2.66	141
4.0	3.55	79
5.0	4.44	50


2018.495-LEA-15
2018.295A-LEA-15




h(m)	D(m)	E(lx)
20°		
1.0	0.38	8345
2.0	0.77	2086
3.0	1.15	927
4.0	1.53	521
5.0	1.91	333



h(m)	D(m)	E(lx)
30°		
1.0	0.59	5262
2.0	1.18	1316
3.0	1.77	584
4.0	2.36	328
5.0	2.95	210




h(m)	D(m)	E(lx)
45°		
1.0	0.80	3244
2.0	1.60	761
3.0	2.40	338
4.0	3.20	190
5.0	4.01	121




h(m)	D(m)	E(lx)
55°		
1.0	1.05	2042
2.0	2.10	510
3.0	3.15	226
4.0	4.20	127
5.0	5.25	81


2018.495-LEA15DW
2018.295A-LEA15DW




h(m)	D(m)	E(lx)
20°		
1.0	0.37	6941
2.0	0.74	1735
3.0	1.11	771
4.0	1.48	433
5.0	1.85	277



h(m)	D(m)	E(lx)
25°		
1.0	0.45	4437
2.0	0.90	1109
3.0	1.34	493
4.0	1.79	277
5.0	2.24	177




h(m)	D(m)	E(lx)
40°		
1.0	0.70	2420
2.0	1.41	605
3.0	2.11	268
4.0	2.82	151
5.0	3.52	96




h(m)	D(m)	E(lx)
50°		
1.0	0.89	1239
2.0	1.78	309
3.0	2.67	137
4.0	3.57	77
5.0	4.46	49

2018.484-LEA-15
2018.278A-LEA-15



h(m)	D(m)	E(lx)
Wallwash		
1.0	0.78	1264
2.0	1.56	316
3.0	2.34	140
4.0	3.12	79
5.0	3.90	57


2018.484-LEA15DW
2018.278A-LEA15DW



h(m)	D(m)	E(lx)
Wallwash		
1.0	0.76	859
2.0	1.58	214
3.0	2.38	95
4.0	3.17	53
5.0	3.96	34





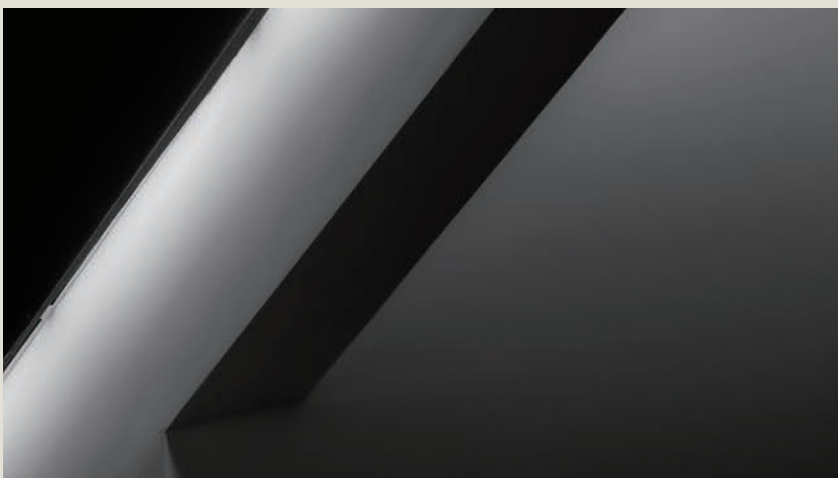

EPIC-135 ▶

4.5"

Round / Square

Fixed
Adjustable
Wallwash


EPIC-135-RTF




Article number	2018.464-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3305 (lm)	2775 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	



Dimmable



Cut out : 5 1/32" (128mm)

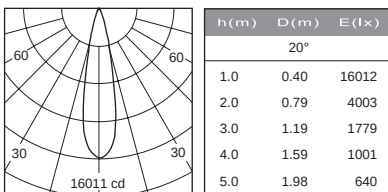


EPIC-135-RTA




Article number	2018.463-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3190 (lm)	2721 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	



Dimmable

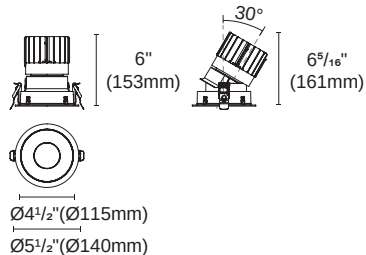


Cut out : 5 1/32" (128mm)

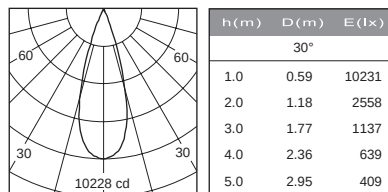



EPIC-135-RTW




Article number	2218.146-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	1961 (lm)	1667 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	



Dimmable



Cut out : 5 1/32" (128mm)

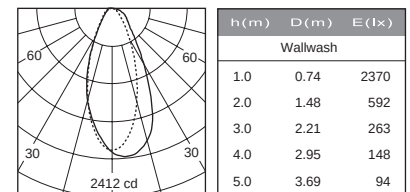

Accessories

ACSG-1
Striped glassACHO-2
Honeycomb louverACDS-6
Diffusion sheetACWG-1
Woven glassACOT-109
Suction cup

Accessories are not suitable for wallwash fixtures


EPIC-135-RTL F




Article number	2018.256F-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3305 (lm)	2775 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	



Dimmable



Cut out : 5 1/32" (128mm)

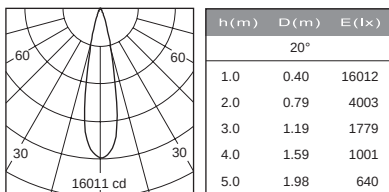


EPIC-135-RTL A




Article number	2018.255F-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3190 (lm)	2721 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	



Dimmable

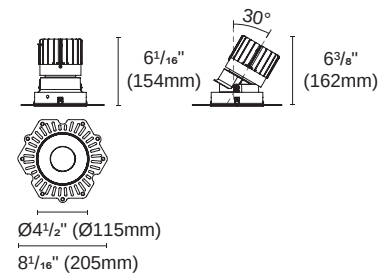

Cut out : 5 1/32" (128mm)

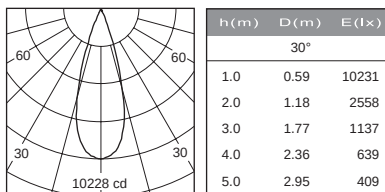


EPIC-135-RTL W




Article number	2218.218F-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	1961 (lm)	1667 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	



Dimmable



Cut out : 5 1/32" (128mm)

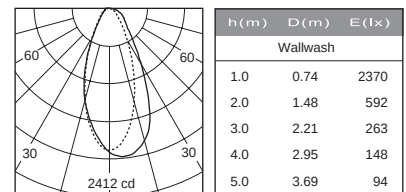


Accessories

ACSG-1
Striped glassACHO-2
Honeycomb louverACDS-6
Diffusion sheetACWG-1
Woven glassACOT-109
Suction cup

Accessories are not suitable for wallwash fixtures



EPIC-135-STF

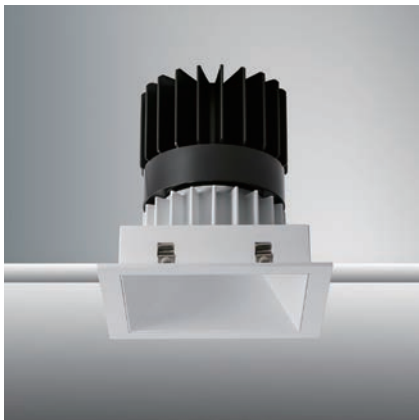

Article number	2018.466-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3258 (lm)	2810 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	



Dimmable

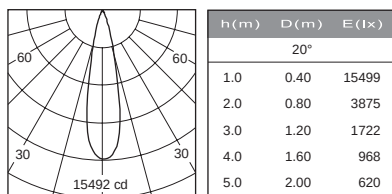
 Cut out : 5¹/₃₂"X5¹/₃₂" (128X128mm)


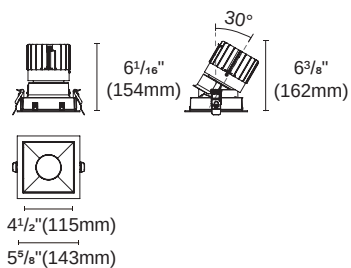
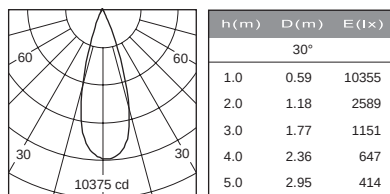
EPIC-135-STA



Article number	2018.465-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3242 (lm)	2765 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	




Dimmable


 Cut out : 5¹/₃₂"X5¹/₃₂" (128X128mm)



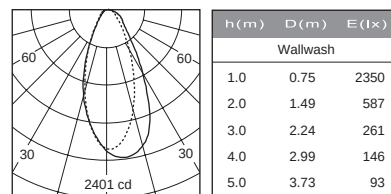
EPIC-135-STW



Article number	2218.147-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	2017 (lm)	1674 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	



Dimmable



 Cut out : 5¹/₃₂"X5¹/₃₂" (128X128mm)


Accessories

ACSG-1
Striped glassACHO-2
Honeycomb louverACDS-6
Diffusion sheetACWG-1
Woven glassACOT-109
Suction cup

Accessories are not suitable for wallwash fixtures


EPIC-135-STLF

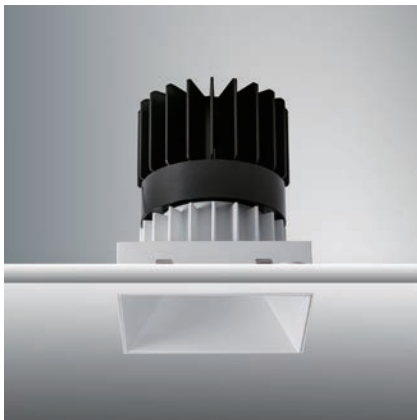


Article number	2018.258A-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3258 (lm)	2810 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	



Dimmable



Cut out : 5 1/32"X5 1/32" (128X128mm)

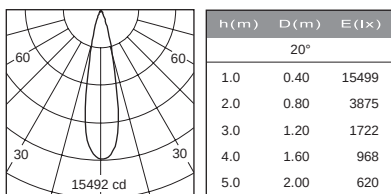


EPIC-135-STLA




Article number	2018.257A-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3242 (lm)	2765 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	



Dimmable

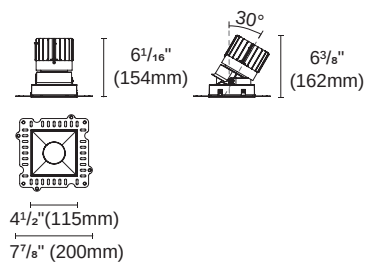


Cut out : 5 1/32"X5 1/32" (128X128mm)

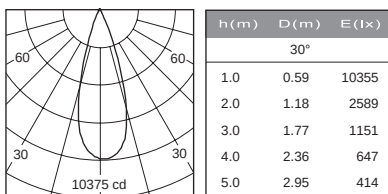


EPIC-135-STLW




Article number	2218.219A-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	2017 (lm)	1674 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	



Dimmable



Cut out : 5 1/32"X5 1/32" (128X128mm)

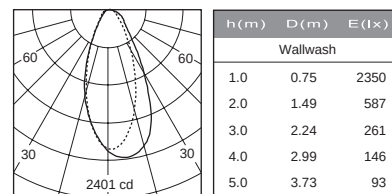


Accessories


ACSG-1
Striped glassACHO-2
Honeycomb louverACDS-6
Diffusion sheetACWG-1
Woven glassACOT-109
Suction cup

Accessories are not suitable for wallwash fixtures


INSTALLATION OPTIONS




ACCG-28B-PUP10A-1WMC-350 0/1-10V
 ACCG-28B-PUP10D-1WMC-350 DALI
 ACCG-28B-PUP10T-1LMC-350 TRIAC
 for EPIC65-2"
 Type: Gear box

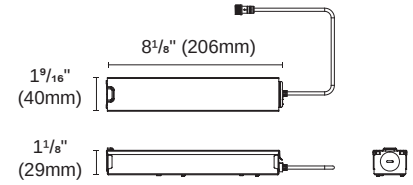

Internal space dimension:
 L 4 3/4" (108mm) X W 1 3/8" (35mm) X H 1" (26mm)




ACCG-22B-PUP20A-1WMC 0/1-10V
 ACCG-22B-PUP20D-1WMC DALI
 ACCG-22B-PUP20T-1LMC TRIAC
 for EPIC85-2.8"
 EPIC110-3.5" (18-21W)
 Type: Gear box

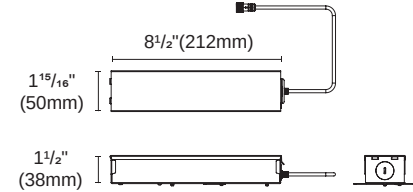

Internal space dimension:
 L 8 3/4" (209mm) X W 1 7/8" (48mm) X H 1 5/16" (33mm)




ACCG-35B-PUP20A-1WMC 0/1-10V
 ACCG-35B-PUP20D-1WMC DALI
 ACCG-35B-PUP20T-1LMC TRIAC
 for EPIC85-2.8"
 EPIC110-3.5" (18-21W)
 Type: Gear box

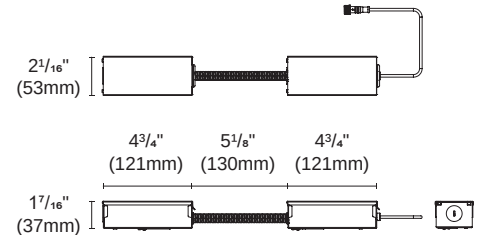

* Use with low ceilings




ACCG-16B-PUP40A-1WMC-850 0/1-10V
 ACCG-16B-PUP40D-1WMC-850 DALI
 ACCG-16B-PUP40T-1LMC-850 TRIAC
 for EPIC110-3.5" (30W)
 Type: Gear box

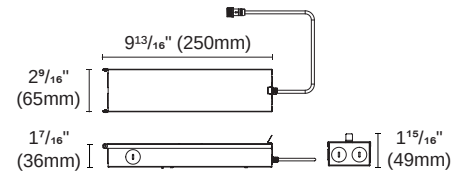

Internal space dimension:
 L 9 13/16" (250mm) X W 2 1/2" (64mm) X H 1 5/16" (34mm)

* For single fixture connection only, not available for parallel multiple connection

ACCG-16B-PUP40A-1WMC-1200 0/1-10V
 ACCG-16B-PUP40D-1WMC-1200 DALI
 ACCG-16B-PUP40T-1LMC-1200 TRIAC
 for EPIC135-4.5"
 Type: Gear box





ACCH-12-60 for EPIC65-2"
Type: New construction plate

Cut out:

Round : $\varnothing 2\frac{12}{32}$ " ($\varnothing 60$ mm)

Square : $\square 2\frac{12}{32}$ " ($\square 60$ mm)

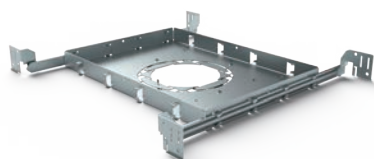



ACCH-12-80 for EPIC85-2.8"
Type: New construction plate

Cut out:

Round : $\varnothing 3\frac{5}{32}$ " ($\varnothing 80$ mm)

Square : $\square 3\frac{5}{32}$ " ($\square 80$ mm)

Also for Millwork

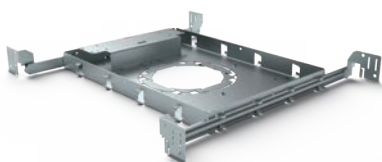



ACCH-12H-100 for EPIC110-3.5"
Type: New construction plate

Cut out:

Round : $\varnothing 3\frac{30}{32}$ " ($\varnothing 100$ mm)

Square : $\square 3\frac{30}{32}$ " ($\square 100$ mm)

Also for Millwork

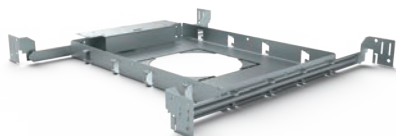


ACCH-12H-125
for EPIC135-4.5"
Type: New construction plate


Cut out:

Round : $\varnothing 5\frac{1}{32}$ " ($\varnothing 128$ mm)

Square : $\square 5\frac{1}{32}$ " ($\square 128$ mm)



INSTALLATION OPTIONS

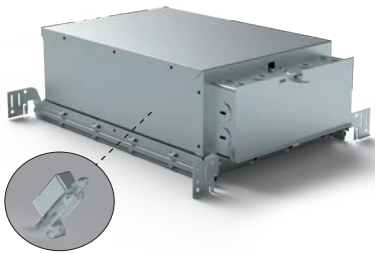

Driver is secured on patent designed bracket


ACCH-12D-60-PUP10A-1WMC-350 0/1-10V
 ACCH-12D-60-PUP10D-1WMC-350 DALI
 ACCH-12D-60-PUP10T-1LMC-350 TRIAC
 for EPIC65-2"

Type: IC Box

Cut out:

Round : $\varnothing 2^{12}/_{32}$ " ($\varnothing 60$ mm)

Square : $\square 2^{12}/_{32}$ " ($\square 60$ mm)

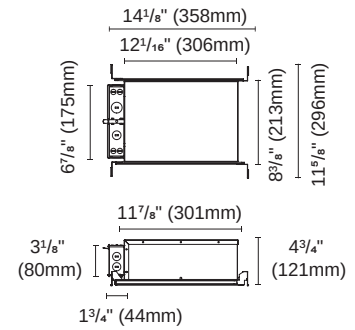

ACCH-12D-80-PUP20A-1WMC 0/1-10V
 ACCH-12D-80-PUP20D-1WMC DALI
 ACCH-12D-80-PUP20T-1LMC TRIAC
 for EPIC85-2.8"

Type: IC Box

Cut out:

Round : $\varnothing 3^{5}/_{32}$ " ($\varnothing 80$ mm)

Square : $\square 3^{5}/_{32}$ " ($\square 80$ mm)

Also for Millwork



ACCH-12B-100-PUP20A-1WMC 0/1-10V
 ACCH-12B-100-PUP20D-1WMC DALI
 ACCH-12B-100-PUP20T-1LMC TRIAC
 for EPIC110-3.5" (18-21W)


Type: IC Box

Cut out:

Round : $\varnothing 3^{30}/_{32}$ " ($\varnothing 100$ mm)

Square : $\square 3^{30}/_{32}$ " ($\square 100$ mm)

Also for Millwork

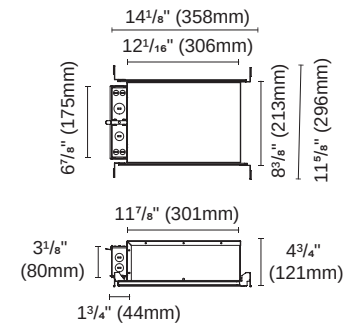

ACCH-7B-100-PUP40A-1WMC-850 0/1-10V
 ACCH-7B-100-PUP40D-1WMC-850 DALI
 ACCH-7B-100-PUP40T-1LMC-850 TRIAC
 for EPIC110-3.5" (25W)


Type: IC Box

Cut out:

Round : $\varnothing 3^{30}/_{32}$ " ($\varnothing 100$ mm)

Square : $\square 3^{30}/_{32}$ " ($\square 100$ mm)

Also for Millwork

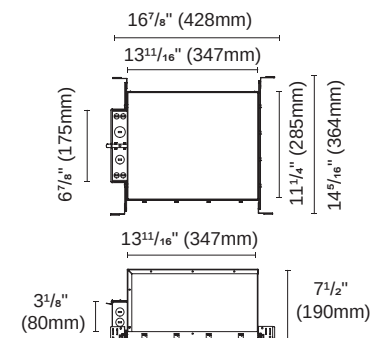

ACCH-7B-125-PUP40A-1WMC-1200 0/1-10V
 ACCH-7B-125-PUP40D-1WMC-1200 DALI
 ACCH-7B-125-PUP40T-1LMC-1200 TRIAC
 for EPIC135-4.5"

Type: IC Box


Cut out:

Round : $\varnothing 5^{1}/_{32}$ " ($\varnothing 128$ mm)

Square : $\square 5^{1}/_{32}$ " ($\square 128$ mm)



ACCI-3
 Type: Emergency battery holder
 For BillDa emergency led driver-
 Model NO. BLD-HM08D-YYY
 BLD-HM15D-YYY
 BLD-HM20D-YYY
 BLD-HM25D-YYY

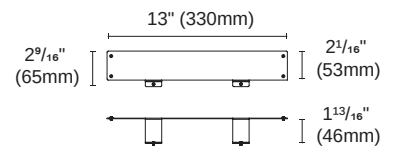

ACCI-5
 Type: Remodel stand



BRANKO SERIES (AM)



BRANKO (AM)

BRANKO is a modern, sleek, efficient indoor lighting solution with convenient installation and versatility. It is designed to provide even and soft illumination, avoiding harsh glare. They are commonly used for indoor lighting in spaces like living rooms, bedrooms, providing comfortable illumination.

Shape
(Baffle Size)



Round
2"



Round
2.8"



Round
3.5"



Square
2.8"



Square
3.5"

Mountings



Recessed
Trim



Recessed
Trimless



Millwork

Light distributions



Fixed



Adjustable

BRANKO
recessed downlights



LEA-13



LEA-14



LEA-14-DW
Dim To Warm
(ETL pending)

	2" Fixed	2" Adjustable	2.8" Fixed	2.8" Adjustable
Round				
Cone baffle				
Trim-A				
Trim-B				
Trimless				
Mill work				
Pinhole baffle				
Trim-A				
Trim-B				
Trimless				
Millwork				
Square				
Cone baffle				
Trim-A				
Trim-B				
Trimless				
Millwork				
Pinhole baffle				
Trim-A				
Trim-B				
Trimless				
Millwork				



LEA-15



LEA-15-DW
Dim to warm



ACOT-84-AM

	3.5" Fixed	3.5" Adjustable
Round		
Cone baffle		
Trim-A		
Trim-B		
Trimless		
Millwork		
Pinhole baffle		
Trim-A		
Trim-B		
Trimless		
Millwork		
Square		
Cone baffle		
Trim-A		
Trim-B		
Trimless		
Millwork		
Pinhole baffle		
Trim-A		
Trim-B		
Trimless		
Millwork		



Cone baffle

It is a multifunctional accent light that can highlight a single object or architectural element.

Available in fixed and adjustable versions, while the adjustable version can be precisely set to tilt at an angle of up to 30 degrees, so the light will be emitted exactly where you want it.

There are also different accessories to choose from, adding more flexibility and freedom for lighting designers. Suitable for hotels and residences.







Pinhole baffle

It is a multifunctional accent light that can highlight a single object or architectural element. To further reduce the visual impact on the ceiling, the pin hole baffle is used to bring the luminaire flush with the ceiling for added glare protection and a 40 degree cut-off angle.

Fixed and adjustable functions are available, while the adjustable version can be precisely set to a tilt angle of up to 30 degrees, so the light will be emitted exactly where you want it.

There are also different accessories to choose from, adding more flexibility and freedom for lighting designers. Suitable for hotels and residences.

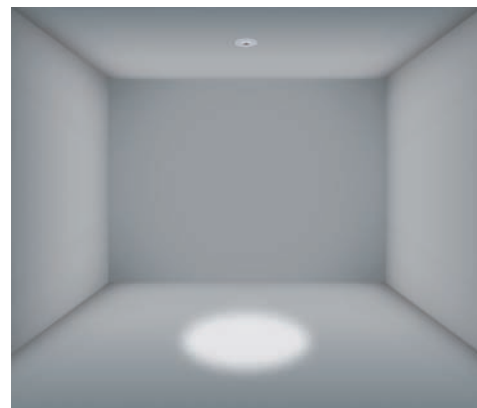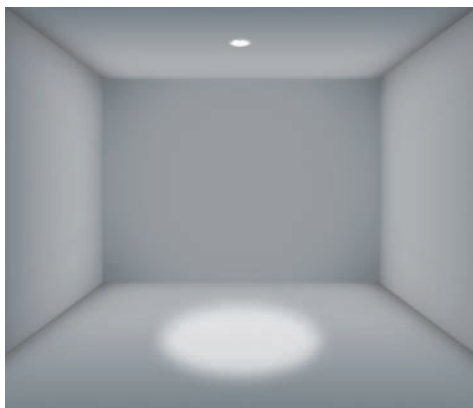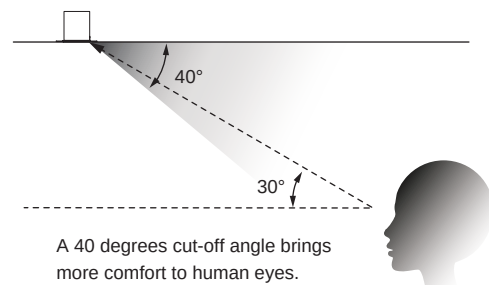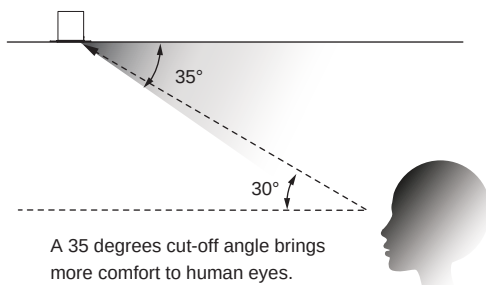





BRANKO-65

2"


Round

Fixed
Adjustable


BRANKO-A-65C-RTF



Article number	2318.157-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	622 (lm)
Beam Angle	17°/24°/36°/41° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable



Cut out : 2 12/32" (60mm)

Accessories




ACHO-6
Honeycomb louver


BRANKO-B-65C-RTF



Article number	2318.116-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	622 (lm)
Beam Angle	17°/24°/36°/41° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable



Cut out : 2 12/32" (60mm)

Accessories




ACHO-6
Honeycomb louver


BRANKO-B-65C-RTLF



Article number	2318.210F-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	622 (lm)
Beam Angle	17°/24°/36°/41° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable



Cut out : 2 12/32" (60mm)

Accessories



ACHO-6
Honeycomb louver



ACOT-107
Suction cup


BRANKO-A-65C-RTA



Article number	2318.159-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	603 (lm)
Beam Angle	15°/23°/34°/39° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable

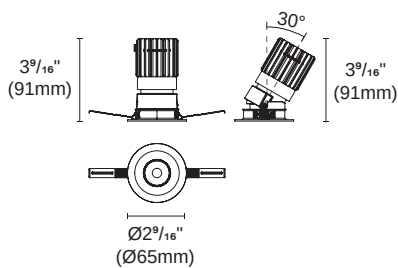

⌀ Cut out : 2 12/32" (60mm)

Accessories



ACHO-6
Honeycomb louver


BRANKO-B-65C-RTA



Article number	2318.117-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	603 (lm)
Beam Angle	15°/23°/34°/39° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable



⌀ Cut out : 2 12/32" (60mm)

Accessories



ACHO-6
Honeycomb louver


BRANKO-B-65C-RTLA



Article number	2318.211F-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	603 (lm)
Beam Angle	15°/23°/34°/39° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable

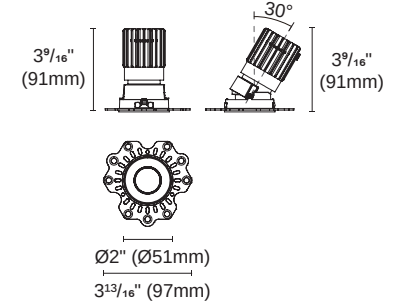

⌀ Cut out : 2 12/32" (60mm)

Accessories




ACHO-6
Honeycomb louver


BRANKO-A-65P-RTF



Article number	2318.158-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	525 (lm)
Beam Angle	16°/22°/32°/37° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable



Cut out : 2 12/32" (60mm)


Accessories

ACHO-6
Honeycomb louver


BRANKO-B-65-RTF



Article number	2318.120-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	525 (lm)
Beam Angle	16°/22°/32°/37° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable



Cut out : 2 12/32" (60mm)


Accessories

ACHO-6
Honeycomb louver


BRANKO-B-65-RTL



Article number	2318.212F-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	525 (lm)
Beam Angle	16°/22°/32°/37° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable



Cut out : 2 12/32" (60mm)


Accessories

ACHO-6
Honeycomb louver


BRANKO-A-65P-RTA



Article number	2318.160-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	578 (lm)
Beam Angle	16°/22°/32°/40° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable

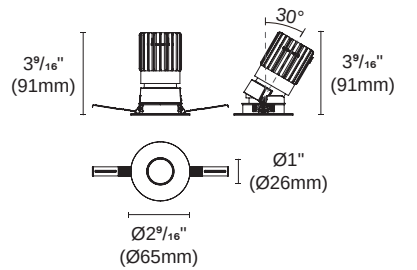

Cut out : 2 12/32" (60mm)

Accessories




ACHO-6
Honeycomb louver


BRANKO-B-65-RTA



Article number	2318.121-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	578 (lm)
Beam Angle	16°/22°/32°/40° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable

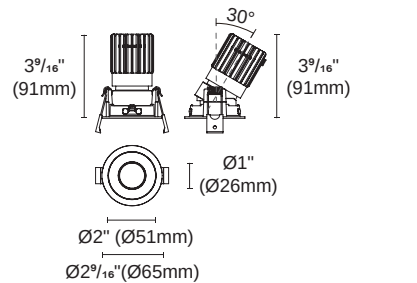

Cut out : 2 12/32" (60mm)

Accessories



ACHO-6
Honeycomb louver


BRANKO-B-65-RTL



Article number	2318.213F-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	578 (lm)
Beam Angle	16°/22°/32°/40° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable

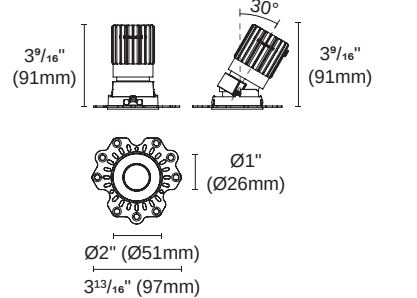

Cut out : 2 12/32" (60mm)

Accessories





ACHO-6
Honeycomb louver

**15°**

Fixed UGR<9

2318.157-LEA-13
2318.116-LEA-13
2318.210F-LEA-13





H(m)	D(m)	E(lx)
15°		
1.0	0.30	2480
2.0	0.60	620
3.0	0.90	275
4.0	1.20	155
5.0	1.50	99

**24°**

Fixed UGR<7

2318.157-LEA-13
2318.116-LEA-13
2318.210F-LEA-13





H(m)	D(m)	E(lx)
24°		
1.0	0.43	1938
2.0	0.86	484
3.0	1.29	215
4.0	1.73	121
5.0	2.16	77

**36°**

Fixed UGR<12

2318.157-LEA-13
2318.116-LEA-13
2318.210F-LEA-13





H(m)	D(m)	E(lx)
36°		
1.0	0.65	1077
2.0	1.30	269
3.0	1.94	119
4.0	2.59	67
5.0	3.24	43

**41°**

Fixed UGR<17

2318.157-LEA-13
2318.116-LEA-13
2318.210F-LEA-13





H(m)	D(m)	E(lx)
41°		
1.0	0.75	800
2.0	1.51	200
3.0	2.26	88
4.0	3.02	50
5.0	3.77	32

**15°**

Adjustable

2318.159-LEA-13
2318.117-LEA-13
2318.211F-LEA-13





H(m)	D(m)	E(lx)
15°		
1.0	0.28	2163
2.0	0.56	540
3.0	0.84	240
4.0	1.12	135
5.0	1.40	86

**24°**

Adjustable

2318.159-LEA-13
2318.117-LEA-13
2318.211F-LEA-13





H(m)	D(m)	E(lx)
24°		
1.0	0.41	1812
2.0	0.82	453
3.0	1.23	201
4.0	1.64	113
5.0	2.05	72

**34°**

Adjustable

2318.159-LEA-13
2318.117-LEA-13
2318.211F-LEA-13





H(m)	D(m)	E(lx)
34°		
1.0	0.61	1003
2.0	1.22	250
3.0	1.82	111
4.0	2.43	62
5.0	3.04	40

**40°**

Adjustable

2318.159-LEA-13
2318.117-LEA-13
2318.211F-LEA-13





H(m)	D(m)	E(lx)
40°		
1.0	0.71	800
2.0	1.43	210
3.0	2.14	93
4.0	2.85	52
5.0	3.56	33

**16°**

Fixed UGR<6

2318.158-LEA-13
2318.120-LEA-13
2318.212F-LEA-13





H(m)	D(m)	E(lx)
16°		
1.0	0.28	2469
2.0	0.56	617
3.0	0.84	274
4.0	1.12	154
5.0	1.40	98

**22°**

Fixed UGR<7

2318.158-LEA-13
2318.120-LEA-13
2318.212F-LEA-13





H(m)	D(m)	E(lx)
22°		
1.0	0.39	1811
2.0	0.79	452
3.0	1.18	201
4.0	1.57	113
5.0	1.96	72

**32°**

Fixed UGR<13

2318.158-LEA-13
2318.120-LEA-13
2318.212F-LEA-13





H(m)	D(m)	E(lx)
32°		
1.0	0.58	975
2.0	1.15	243
3.0	1.73	108
4.0	2.30	60
5.0	2.88	39

**37°**

Fixed UGR<19

2318.158-LEA-13
2318.120-LEA-13
2318.212F-LEA-13





H(m)	D(m)	E(lx)
37°		
1.0	0.67	776
2.0	1.35	194
3.0	2.02	86
4.0	2.70	48
5.0	3.37	31

**16°**

Adjustable

2318.160-LEA-13
2318.121-LEA-13
2318.213F-LEA-13





H(m)	D(m)	E(lx)
16°		
1.0	0.29	2176
2.0	0.57	544
3.0	0.86	241
4.0	1.14	136
5.0	1.43	87

**22°**

Adjustable

2318.160-LEA-13
2318.121-LEA-13
2318.213F-LEA-13





H(m)	D(m)	E(lx)
22°		
1.0	0.39	2637
2.0	0.78	659
3.0	1.17	293
4.0	1.56	164
5.0	1.95	105

**32°**

Adjustable

2318.160-LEA-13
2318.121-LEA-13
2318.213F-LEA-13





H(m)	D(m)	E(lx)
32°		
1.0	0.59	1047
2.0	1.18	261
3.0	1.77	116
4.0	2.36	65
5.0	2.95	41

**40°**

Adjustable

2318.160-LEA-13
2318.121-LEA-13
2318.213F-LEA-13



H(m)	D(m)	E(lx)
40°		
1.0	0.73	785
2.0	1.46	196
3.0	2.19	87
4.0	2.93	49
5.0	3.66	31



BRANKO-85

2.8"


Round / Square

Fixed
Adjustable


BRANKO-A-85C-RTF



Article number	2318.161-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1231 (lm)	1027 (lm)
Beam Angle	26°/32°/44°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable



Cut out : 3 5/32" (80mm)


Accessories

ACHO-5
Honeycomb louver


BRANKO-B-85C-RTF



Article number	2318.110-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1231 (lm)	1027 (lm)
Beam Angle	26°/32°/44°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable



Cut out : 3 5/32" (80mm)


Accessories

ACHO-5
Honeycomb louver


BRANKO-B-85C-RTL



Article number	2318.206F-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1231 (lm)	1027 (lm)
Beam Angle	26°/32°/44°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable



Cut out : 3 5/32" (80mm)

Accessories

ACHO-5
Honeycomb louverACOT-108
Suction cupEP85-TL-WD
Millwork


BRANKO-A-85C-RTA



Article number	2318.163-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1222 (lm)	1020 (lm)
Beam Angle	26°/32°/44°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	




Dimmable

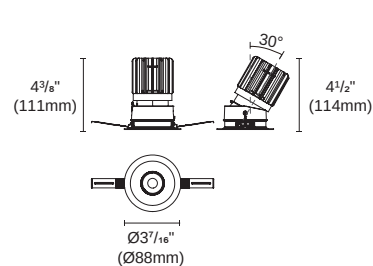

⌀ Cut out : 3 5/32" (80mm)

Accessories

ACHO-5
Honeycomb louverS-007
Snoot


BRANKO-B-85C-RTA



Article number	2318.111-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1222 (lm)	1020 (lm)
Beam Angle	26°/32°/44°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	




Dimmable

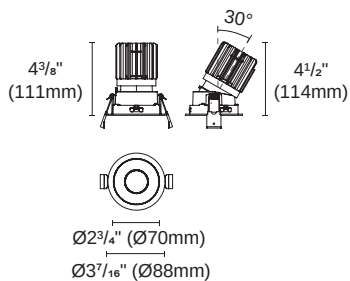

⌀ Cut out : 3 5/32" (80mm)


Accessories

ACHO-5
Honeycomb louverS-007
Snoot


BRANKO-B-85C-RTLA



Article number	2318.207F-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1222 (lm)	1020 (lm)
Beam Angle	26°/32°/44°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable

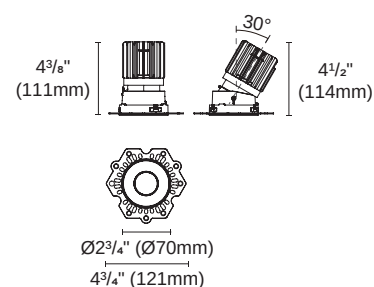

⌀ Cut out : 3 5/32" (80mm)


Accessories

ACHO-5
Honeycomb louverS-007
SnootEP85-TL-WD
Millwork


BRANKO-A-85P-RTF



Article number	2318.162-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1213 (lm)	977 (lm)
Beam Angle	25°/31°/46°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable



⌀ Cut out : 3 5/32" (80mm)


Accessories

ACHO-5
Honeycomb louver


BRANKO-B-85P-RTF



Article number	2318.114-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1213 (lm)	977 (lm)
Beam Angle	25°/31°/46°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable



⌀ Cut out : 3 5/32" (80mm)


Accessories

ACHO-5
Honeycomb louver


BRANKO-B-85P-RTL



Article number	2318.208F-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1213 (lm)	977 (lm)
Beam Angle	25°/31°/46°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable



⌀ Cut out : 3 5/32" (80mm)


Accessories

ACHO-5
Honeycomb louverEP85-TL-WD
Millwork


BRANKO-A-85P-RTA



Article number	2318.164-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1213 (lm)	977 (lm)
Beam Angle	25°/31°/46°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	




Dimmable

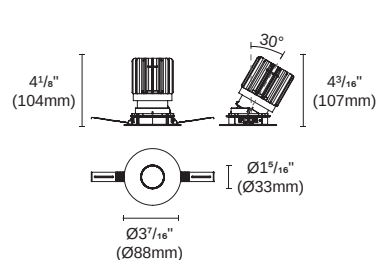

⌀ Cut out : 3 5/32" (80mm)


Accessories

ACHO-5
Honeycomb louverS-007
Snoot


BRANKO-B-85P-RTA



Article number	2318.115-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1213 (lm)	977 (lm)
Beam Angle	25°/31°/46°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	




Dimmable

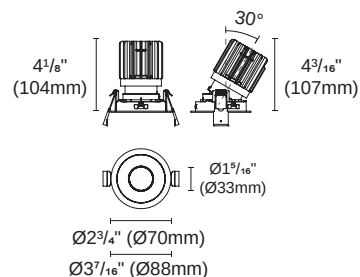

⌀ Cut out : 3 5/32" (80mm)


Accessories

ACHO-5
Honeycomb louverS-007
Snoot


BRANKO-B-85P-RTL



Article number	2318.209F-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1213 (lm)	977 (lm)
Beam Angle	25°/31°/46°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable

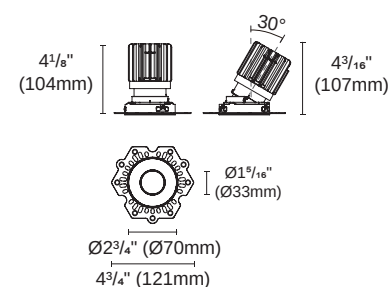

⌀ Cut out : 3 5/32" (80mm)


Accessories

ACHO-5
Honeycomb louverS-007
SnootEP85-TL-WD
Millwork


BRANKO-A-85C-STF



Article number	2418.103-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1181 (lm)	950 (lm)
Beam Angle	25°/32°/45°/53° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable



Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)


Accessories

ACHO-5
Honeycomb louver


BRANKO-B-85C-STF



Article number	2418.109-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1181 (lm)	950 (lm)
Beam Angle	25°/32°/45°/53° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable



Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)


Accessories

ACHO-5
Honeycomb louver


BRANKO-B-85C-STLF



Article number	2418.200A-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1181 (lm)	950 (lm)
Beam Angle	25°/32°/45°/53° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable



Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)

Accessories

ACHO-5
Honeycomb louverEP85-TL-WD
Millwork


BRANKO-A-85C-STA



Article number	2418.107-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1177 (lm)	948 (lm)
Beam Angle	25°/32°/45°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	




Dimmable

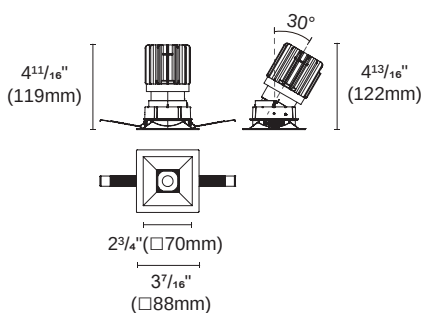

Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)


Accessories

ACHO-5
Honeycomb louverS-007
Snoot


BRANKO-B-85C-STA



Article number	2418.111-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1177 (lm)	948 (lm)
Beam Angle	25°/32°/45°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	




Dimmable

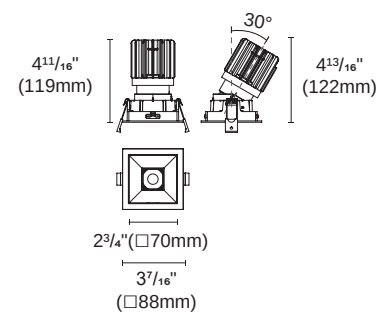

Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)


Accessories

ACHO-5
Honeycomb louverS-007
Snoot


BRANKO-B-85C-STLA



Article number	2418.202A-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1177 (lm)	948 (lm)
Beam Angle	25°/32°/45°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable

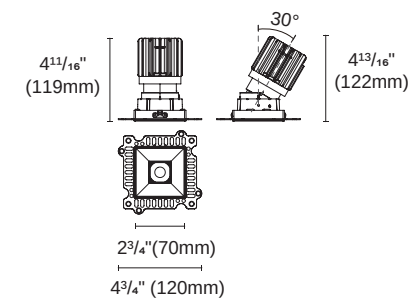

Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)


Accessories

ACHO-5
Honeycomb louverS-007
SnootEP85-TL-WD
Millwork


BRANKO-A-85P-STF



Article number	2418.104-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1173 (lm)	945 (lm)
Beam Angle	25°/32°/45°/53° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable



Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)

Accessories

ACHO-5
Honeycomb louver


BRANKO-B-85P-STF



Article number	2418.110-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1173 (lm)	945 (lm)
Beam Angle	25°/32°/45°/53° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable



Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)


Accessories

ACHO-5
Honeycomb louver


BRANKO-B-85P-STLF



Article number	2418.201A-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1173 (lm)	945 (lm)
Beam Angle	25°/32°/45°/53° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable



Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)

Accessories

ACHO-5
Honeycomb louverEP85-TL-WD
Millwork


BRANKO-A-85P-STA



Article number	2418.108-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1170 (lm)	932 (lm)
Beam Angle	24°/32°/45°/53° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	




Dimmable

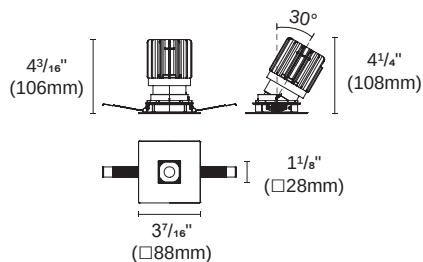

Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)

Accessories

ACHO-5
Honeycomb louverS-007
Snoot


BRANKO-B-85P-STA



Article number	2418.112-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1170 (lm)	932 (lm)
Beam Angle	24°/32°/45°/53° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	




Dimmable

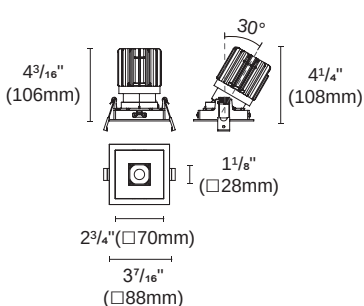

Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)

Accessories

ACHO-5
Honeycomb louverS-007
Snoot


BRANKO-B-85P-STLA



Article number	2418.203A-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	15W
Current	450 (mA)	350 (mA)
Delivered Lumen	1170 (lm)	932 (lm)
Beam Angle	24°/32°/45°/53° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable

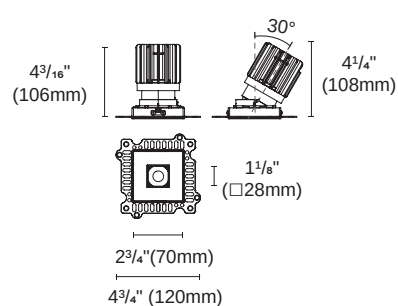

Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)

Accessories

ACHO-5
Honeycomb louverS-007
SnootEP85-TL-WD
Millwork



BRANKO-110 ▶

3.5"

Round / Square

Fixed
Adjustable


BRANKO-A-110C-RTF



Article number	2318.131-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1559 (lm)
Beam Angle	21°/32°/42°/52° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2318.131-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	34-1003 (lm)
Beam Angle	20°/25°/40°/46° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable



⌀ Cut out : 3³⁰/₃₂" (100mm)

Accessories

H7-1
Honeycomb louver


BRANKO-B-110C-RTF



Article number	2318.133-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1559 (lm)
Beam Angle	21°/32°/42°/52° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2318.133-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	34-1003 (lm)
Beam Angle	20°/25°/40°/46° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable



⌀ Cut out : 3³⁰/₃₂" (100mm)

Accessories

H7-1
Honeycomb louver


BRANKO-B-110C-RTL



Article number	2318.214F-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1559 (lm)
Beam Angle	21°/32°/42°/52° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2318.214F-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	34-1003 (lm)
Beam Angle	20°/25°/40°/46° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable



⌀ Cut out : 3³⁰/₃₂" (100mm)


Accessories

H7-1
Honeycomb louverACOT-109
Suction cupEP110-TL-WD
Millwork


BRANKO-A-110C-RTA




Article number	2318.135-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1528 (lm)
Beam Angle	21°/32°/42°/52° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2318.135-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	34-977 (lm)
Beam Angle	20°/25°/40°/46° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable

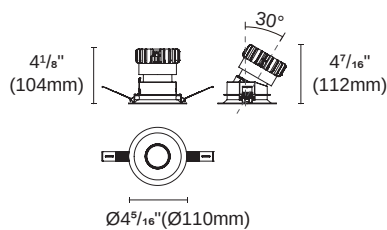
 Cut out : 3³⁰/₃₂" (100mm)

Accessories

H7-1
Honeycomb louverACSN-17
Snoot


BRANKO-B-110C-RTA




Article number	2318.137-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1528 (lm)
Beam Angle	21°/32°/42°/52° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2318.137-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	34-977 (lm)
Beam Angle	20°/25°/40°/46° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable

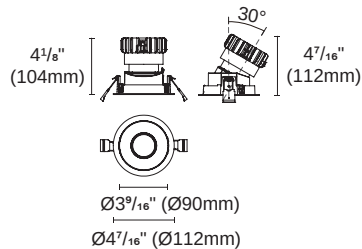
 Cut out : 3³⁰/₃₂" (100mm)

Accessories

H7-1
Honeycomb louverACSN-17
Snoot


BRANKO-B-110C-RTLA



Article number	2318.216F-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1528 (lm)
Beam Angle	21°/32°/42°/52° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2318.216F-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	34-977 (lm)
Beam Angle	20°/25°/40°/46° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable

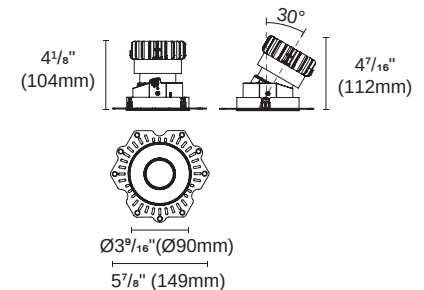
 Cut out : 3³⁰/₃₂" (100mm)

Accessories

H7-1
Honeycomb louverACSN-17
SnootEP110-TL-WD
Millwork


BRANKO-A-110P-RTF



Article number	2318.166-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1487 (lm)
Beam Angle	20°/32°/42°/53° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2318.166-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Lumen	34-1507 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable



⌀ Cut out : 3³⁰/₃₂" (100mm)

Accessories

H7-1
Honeycomb louver


BRANKO-B-110P-RTF



Article number	2318.134-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1487 (lm)
Beam Angle	20°/32°/42°/53° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2318.134-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Lumen	34-1507 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable



⌀ Cut out : 3³⁰/₃₂" (100mm)

Accessories

H7-1
Honeycomb louver


BRANKO-B-110P-RTL



Article number	2318.215F-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1487 (lm)
Beam Angle	20°/32°/42°/53° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2318.215F-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Lumen	34-1507 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable



⌀ Cut out : 3³⁰/₃₂" (100mm)

Accessories


H7-1
Honeycomb louverEP110-TL-WD
Millwork

BRANKO-A-110P-RTA




Article number	2318.136-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1463 (lm)
Beam Angle	20°/31°/41°/51° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2318.136-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	34-876(lm)
Beam Angle	20°/24°/38°/42° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC




Dimmable

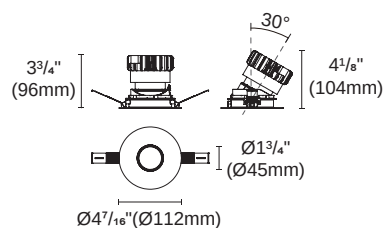

⌀ Cut out : 3^{30/32}" (100mm)

Accessories

H7-1
Honeycomb louverACSN-17
Snoot

BRANKO-B-110P-RTA




Article number	2318.138-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1463 (lm)
Beam Angle	20°/31°/41°/51° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2318.138-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	34-876(lm)
Beam Angle	20°/24°/38°/42° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC




Dimmable

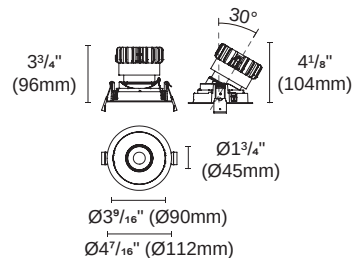

⌀ Cut out : 3^{30/32}" (100mm)

Accessories


H7-1
Honeycomb louverACSN-17
Snoot

BRANKO-B-110P-RTLA




Article number	2318.217F-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1463 (lm)
Beam Angle	20°/31°/41°/51° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2318.217F-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	34-876(lm)
Beam Angle	20°/24°/38°/42° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable

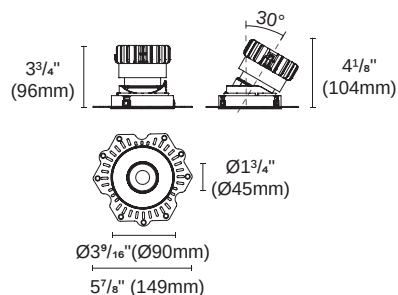

⌀ Cut out : 3^{30/32}" (100mm)

Accessories

H7-1
Honeycomb louverACSN-17
SnootEP110-TL-WD
Millwork

BRANKO-A-110C-STF




Article number	2418.119-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1486 (lm)
Beam Angle	20°/32°/43°/53° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2418.119-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Lumen	34-1507 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable


 Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

Accessories

H7-1
Honeycomb louver

BRANKO-B-110C-STF




Article number	2418.113-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1486 (lm)
Beam Angle	20°/32°/43°/53° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2418.113-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Lumen	34-1507 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable


 Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

Accessories

H7-1
Honeycomb louver

BRANKO-B-110C-STLF




Article number	2418.204A-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1486 (lm)
Beam Angle	20°/32°/43°/53° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2418.204A-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Lumen	34-1507 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable


 Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

Accessories

H7-1
Honeycomb louverEP110-TL-WD
Millwork


BRANKO-A-110C-STA



Article number	2418.121-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1485 (lm)
Beam Angle	20°/32°/43°/53° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2418.121-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Lumen	34-1507 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC




Dimmable

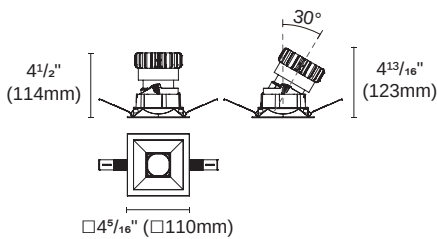

⚠ Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

Accessories

H7-1
Honeycomb louverACSN-17
Snoot


BRANKO-B-110C-STA



Article number	2418.115-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1485 (lm)
Beam Angle	20°/32°/43°/53° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2418.115-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Lumen	34-1507 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC




Dimmable

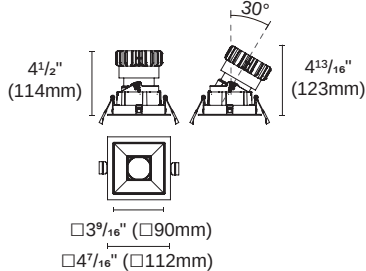

⚠ Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)


Accessories

H7-1
Honeycomb louverACSN-17
Snoot


BRANKO-B-110C-STLA



Article number	2418.206A-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1485 (lm)
Beam Angle	20°/32°/43°/53° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2418.206A-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Lumen	34-1507 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable

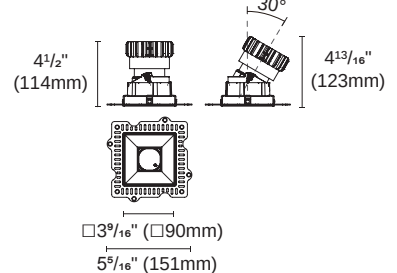

⚠ Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

Accessories

H7-1
Honeycomb louverACSN-17
SnootEP110-TL-WD
Millwork

BRANKO-A-110P-STF




Article number	2418.120-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1489 (lm)
Beam Angle	20°/32°/42°/54° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2418.120-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Lumen	34-1507 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable



Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

Accessories

H7-1
Honeycomb louver

BRANKO-B-110P-STF




Article number	2418.114-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1489 (lm)
Beam Angle	20°/32°/42°/54° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2418.114-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Lumen	34-1507 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable



Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

Accessories


H7-1
Honeycomb louver

BRANKO-B-110P-STLF




Article number	2418.205A-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1489 (lm)
Beam Angle	20°/32°/42°/54° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2418.205A-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Lumen	34-1507 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable



Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

Accessories

H7-1
Honeycomb louverEP110-TL-WD
Millwork

BRANKO-A-110P-STA




Article number	2318.153-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1435 (lm)
Beam Angle	20°/31°/41°/51° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC


Article number	2318.153-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	34-916 (lm)
Beam Angle	20°/25°/37°/41° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable

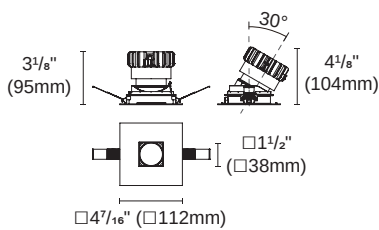
 Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

Accessories

H7-1
Honeycomb louverACSN-17
Snoot

BRANKO-B-110P-STA




Article number	2318.154-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1435 (lm)
Beam Angle	20°/31°/41°/51° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC


Article number	2318.154-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	34-916 (lm)
Beam Angle	20°/25°/37°/41° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable

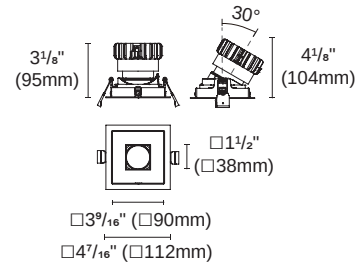
 Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

Accessories

H7-1
Honeycomb louverACSN-17
Snoot

BRANKO-B-110P-STLA




Article number	2318.218A-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1435 (lm)
Beam Angle	20°/31°/41°/51° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2318.218A-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	34-916 (lm)
Beam Angle	20°/25°/37°/41° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable

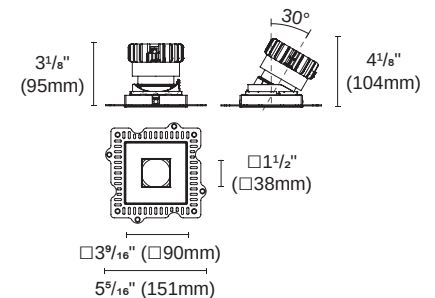
 Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)


Accessories

H7-1
Honeycomb louverACSN-17
SnootEP110-TL-WD
Millwork


BRANKO-A-110C-RTF



Article number	2318.131-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1932 (lm)	1695 (lm)
Beam Angle	27°/38°/46°/56° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable



⌀ Cut out : 3³⁰/₃₂" (100mm)

Accessories




H7-1
Honeycomb louver


BRANKO-B-110C-RTF



Article number	2318.133-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1932 (lm)	1695 (lm)
Beam Angle	27°/38°/46°/56° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable



⌀ Cut out : 3³⁰/₃₂" (100mm)

Accessories




H7-1
Honeycomb louver


BRANKO-B-110C-RTLF



Article number	2318.214F-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1932 (lm)	1695 (lm)
Beam Angle	27°/38°/46°/56° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable



⌀ Cut out : 3³⁰/₃₂" (100mm)

Accessories



H7-1
Honeycomb louver



ACOT-109
Suction cup



EP110-TL-WD
Millwork


BRANKO-A-110C-RTA



Article number	2318.135-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1885 (lm)	1658 (lm)
Beam Angle	27°/37°/46°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	




Dimmable

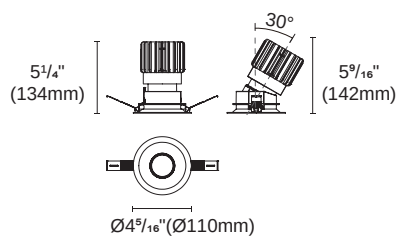

⌀ Cut out : 3³⁰/₃₂" (100mm)

Accessories

H7-1
Honeycomb louverACSN-17
Snoot


BRANKO-B-110C-RTA



Article number	2318.137-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1885 (lm)	1658 (lm)
Beam Angle	27°/37°/46°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	




Dimmable

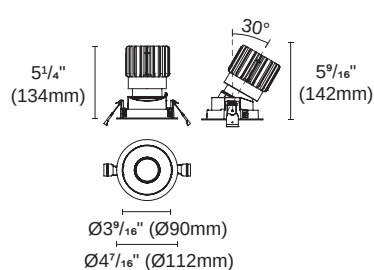

⌀ Cut out : 3³⁰/₃₂" (100mm)

Accessories

H7-1
Honeycomb louverACSN-17
Snoot


BRANKO-B-110C-RTLA



Article number	2318.216F-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1885 (lm)	1658 (lm)
Beam Angle	27°/37°/46°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable

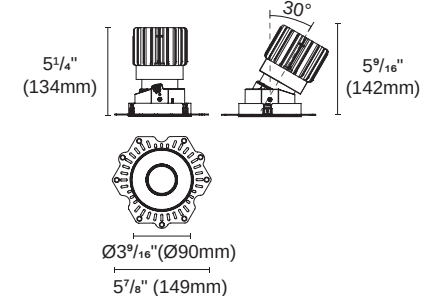

⌀ Cut out : 3³⁰/₃₂" (100mm)


Accessories

H7-1
Honeycomb louverACSN-17
SnootEP110-TL-WD
Millwork


BRANKO-A-110P-RTF



Article number	2318.166-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1803 (lm)	1600 (lm)
Beam Angle	25°/36°/45°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable



⌀ Cut out : 3^{30/32}" (100mm)


Accessories

H7-1
Honeycomb louver


BRANKO-B-110P-RTF



Article number	2318.134-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1803 (lm)	1600 (lm)
Beam Angle	25°/36°/45°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable



⌀ Cut out : 3^{30/32}" (100mm)

Accessories

H7-1
Honeycomb louver


BRANKO-B-110P-RTL



Article number	2318.215F-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1803 (lm)	1600 (lm)
Beam Angle	25°/36°/45°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable



⌀ Cut out : 3^{30/32}" (100mm)

Accessories

H7-1
Honeycomb louverEP110-TL-WD
Millwork


BRANKO-A-110P-RTA



Article number	2318.136-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1704 (lm)	1497 (lm)
Beam Angle	25°/36°/45°/52° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	




Dimmable

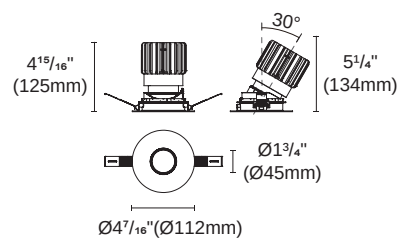

⌀ Cut out : 3³⁰/₃₂" (100mm)

Accessories

H7-1
Honeycomb louverACSN-17
Snoot


BRANKO-B-110P-RTA



Article number	2318.138-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1704 (lm)	1497 (lm)
Beam Angle	25°/36°/45°/52° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	




Dimmable

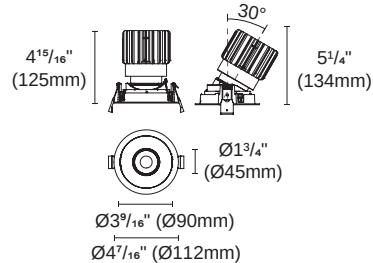

⌀ Cut out : 3³⁰/₃₂" (100mm)

Accessories

H7-1
Honeycomb louverACSN-17
Snoot


BRANKO-B-110P-RTLA



Article number	2318.217F-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1704 (lm)	1497 (lm)
Beam Angle	25°/36°/45°/52° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable

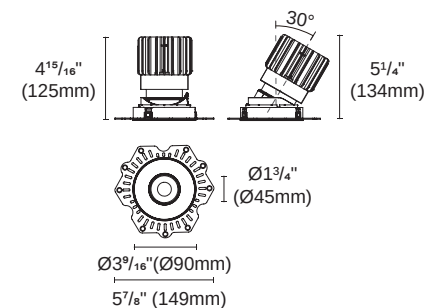

⌀ Cut out : 3³⁰/₃₂" (100mm)


Accessories

H7-1
Honeycomb louverACSN-17
SnootEP110-TL-WD
Millwork


BRANKO-A-110C-STF



Article number	2418.119-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1824 (lm)	1623 (lm)
Beam Angle	27°/37°/46°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable



Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

Accessories




H7-1
Honeycomb louver


BRANKO-B-110C-STF



Article number	2418.113-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1824 (lm)	1623 (lm)
Beam Angle	27°/37°/46°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable



Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

Accessories




H7-1
Honeycomb louver


BRANKO-B-110C-STLF



Article number	2418.204A-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1824 (lm)	1623 (lm)
Beam Angle	27°/37°/46°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable



Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

Accessories



H7-1
Honeycomb louver



EP110-TL-WD
Millwork


BRANKO-A-110C-STA



Article number	2418.121-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1804 (lm)	1600 (lm)
Beam Angle	27°/37°/45°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	




Dimmable

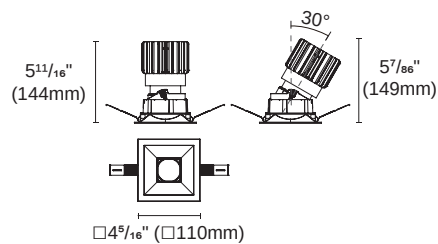

Cut out : 3^{30/32}"X3^{30/32}" (100X100mm)

Accessories

H7-1
Honeycomb louverACSN-17
Snoot


BRANKO-B-110C-STA



Article number	2418.115-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1804 (lm)	1600 (lm)
Beam Angle	27°/37°/45°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	




Dimmable

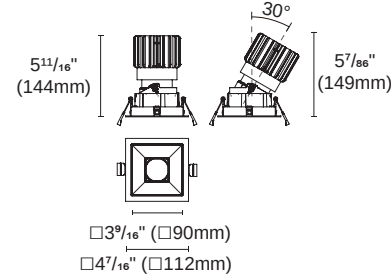

Cut out : 3^{30/32}"X3^{30/32}" (100X100mm)

Accessories

H7-1
Honeycomb louverACSN-17
Snoot


BRANKO-B-110C-STLA



Article number	2418.206A-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1804 (lm)	1600 (lm)
Beam Angle	27°/37°/45°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable

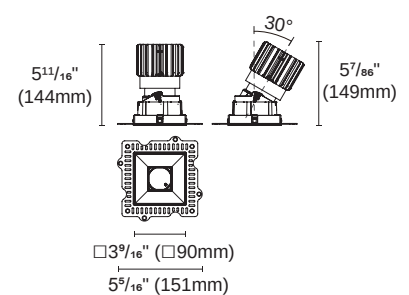

Cut out : 3^{30/32}"X3^{30/32}" (100X100mm)


Accessories

H7-1
Honeycomb louverACSN-17
SnootEP110-TL-WD
Millwork


BRANKO-A-110P-STF



Article number	2418.120-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1826 (lm)	1618 (lm)
Beam Angle	26°/36°/45°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable



Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

Accessories




H7-1
Honeycomb louver


BRANKO-B-110P-STF



Article number	2418.114-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1826 (lm)	1618 (lm)
Beam Angle	26°/36°/45°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable



Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

Accessories




H7-1
Honeycomb louver


BRANKO-B-110P-STLF



Article number	2418.205A-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1826 (lm)	1618 (lm)
Beam Angle	26°/36°/45°/54° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable



Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

Accessories



H7-1
Honeycomb louver



EP110-TL-WD
Millwork


BRANKO-A-110P-STA




Article number	2318.153-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1728 (lm)	1597 (lm)
Beam Angle	26°/36°/44°/52° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable

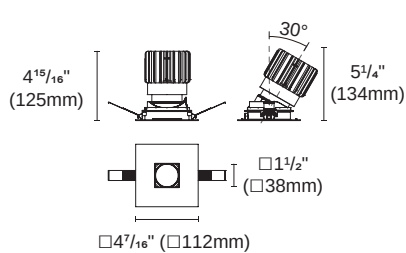
 Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

Accessories

H7-1
Honeycomb louverACSN-17
Snoot


BRANKO-B-110P-STA




Article number	2318.154-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1728 (lm)	1597 (lm)
Beam Angle	26°/36°/44°/52° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable

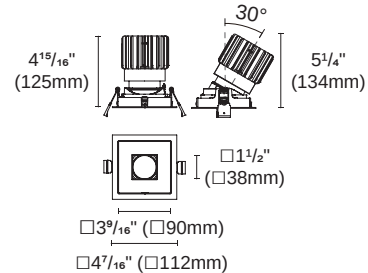
 Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)


Accessories

H7-1
Honeycomb louverACSN-17
Snoot


BRANKO-B-110P-STLA



Article number	2318.218A-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1728 (lm)	1597 (lm)
Beam Angle	26°/36°/44°/52° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	




Dimmable

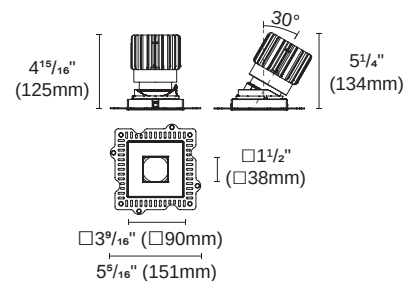
 Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)


Accessories

H7-1
Honeycomb louverACSN-17
SnootEP110-TL-WD
Millwork


INSTALLATION OPTIONS




ACCG-28B-PUP10A-1WMC-350 0/1-10V
 ACCG-28B-PUP10D-1WMC-350 DALI
 ACCG-28B-PUP10T-1LMC-350 TRIAC
 for BRANKO65-2"
 Type: Gear box

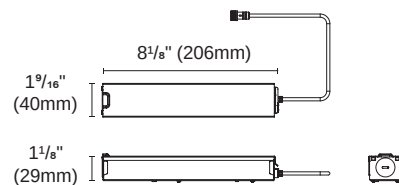

Internal space dimension:
 L 4 1/4" (108mm) X W 1 3/8" (35mm) X H 1" (26mm)




ACCG-22B-PUP20A-1WMC 0/1-10V
 ACCG-22B-PUP20D-1WMC DALI
 ACCG-22B-PUP20T-1LMC TRIAC
 for BRANKO85-2.8"
 BRANKO110-3.5" (18-21W)
 Type: Gear box

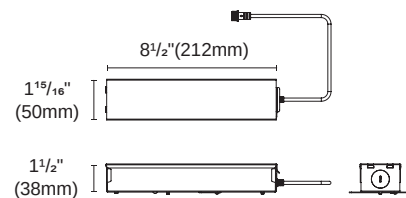

Internal space dimension:
 L 8 1/4" (209mm) X W 1 7/8" (48mm) X H 1 5/16" (33mm)




ACCG-35B-PUP20A-1WMC 0/1-10V
 ACCG-35B-PUP20D-1WMC DALI
 ACCG-35B-PUP20T-1LMC TRIAC
 for BRANKO85-2.8"
 BRANKO110-3.5" (18-21W)
 Type: Gear box

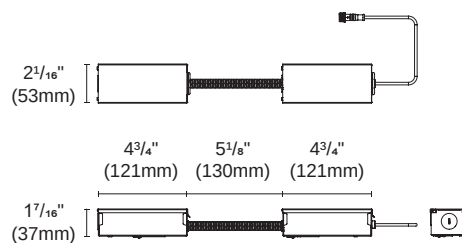

* Use with low ceilings




ACCG-16B-PUP40A-1WMC-850 0/1-10V
 ACCG-16B-PUP40D-1WMC-850 DALI
 ACCG-16B-PUP40T-1LMC-850 TRIAC
 for BRANKO110-3.5" (30W)
 Type: Gear box

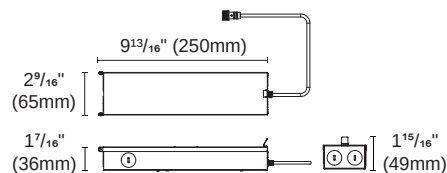

Internal space dimension:
 L 9 13/16" (250mm) X W 2 1/2" (64mm) X H 1 5/16" (34mm)

* For single fixture connection only, not available for parallel multiple connection





ACCH-12-60 for BRANKO65-2"

Type: New construction plate

Cut out:

Round : $\varnothing 2^{12/32}$ " ($\varnothing 60$ mm)

Square : $\square 2^{12/32}$ " ($\square 60$ mm)

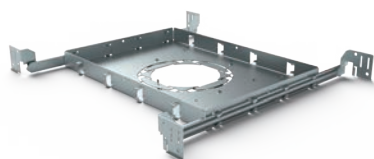

ACCH-12-80 for BRANKO85-2.8"



Type: New construction plate

Cut out:

Round : $\varnothing 3^{5/32}$ " ($\varnothing 80$ mm)

Square : $\square 3^{5/32}$ " ($\square 80$ mm)

Also for Millwork

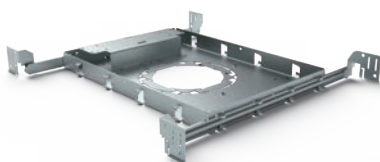

ACCH-12H-100 for BRANKO110-3.5"


Type: New construction plate

Cut out:


Round : $\varnothing 3^{30/32}$ " ($\varnothing 100$ mm)

Square : $\square 3^{30/32}$ " ($\square 100$ mm)

Also for Millwork



INSTALLATION OPTIONS

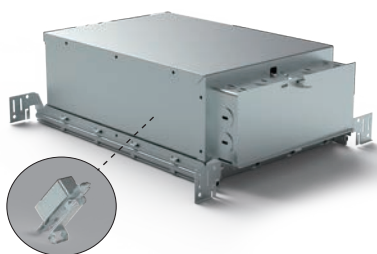

Driver is secured on patent designed bracket


ACCH-12D-60-PUP10A-1WMC-350 0/1-10V
 ACCH-12D-60-PUP10D-1WMC-350 DALI
 ACCH-12D-60-PUP10T-1LMC-350 TRIAC
 for BRANKO65-2"

Type: IC Box

Cut out:

Round : $\varnothing 2\frac{12}{32}$ " ($\varnothing 60$ mm)

Square : $\square 2\frac{12}{32}$ " ($\square 60$ mm)



ACCH-12D-80-PUP20A-1WMC 0/1-10V
 ACCH-12D-80-PUP20D-1WMC DALI
 ACCH-12D-80-PUP20T-1LMC TRIAC
 for BRANKO85-2.8"

Type: IC Box

Cut out:

Round : $\varnothing 3\frac{5}{32}$ " ($\varnothing 80$ mm)

Square : $\square 3\frac{5}{32}$ " ($\square 80$ mm)

Also for Millwork



ACCH-12B-100-PUP20A-1WMC 0/1-10V
 ACCH-12B-100-PUP20D-1WMC DALI
 ACCH-12B-100-PUP20T-1LMC TRIAC
 for BRANKO110-3.5" (18-21W)


Type: IC Box

Cut out:

Round : $\varnothing 3\frac{30}{32}$ " ($\varnothing 100$ mm)

Square : $\square 3\frac{30}{32}$ " ($\square 100$ mm)

Also for Millwork



ACCH-7B-100-PUP40A-1WMC-850 0/1-10V
 ACCH-7B-100-PUP40D-1WMC-850 DALI
 ACCH-7B-100-PUP40T-1LMC-850 TRIAC
 for BRANKO110-3.5" (25W)


Type: IC Box

Cut out:

Round : $\varnothing 3\frac{30}{32}$ " ($\varnothing 100$ mm)


Square : $\square 3\frac{30}{32}$ " ($\square 100$ mm)

Also for Millwork

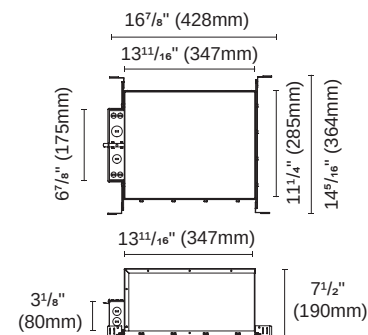




ACCI-3
 Type: Emergency battery holder
 For BillDa emergency led driver-
 Model NO. BLD-HM08D-YYY
 BLD-HM15D-YYY
 BLD-HM20D-YYY
 BLD-HM25D-YYY

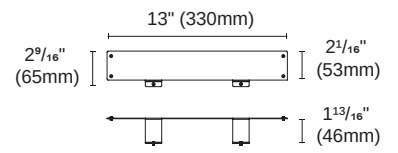

ACCI-5
 Type: Remodel stand



STELLAR SERIES (AM)

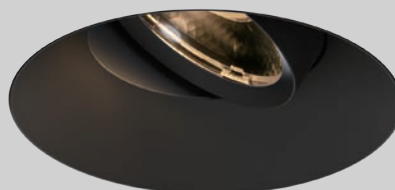

STELLAR_(AM)

STELLAR It can be rotated 355 degrees, swaying various angles to illuminate the display items
This lamp has an accent lighting sleeve accessory design . it can focus more on the lighting display items.
It is the design based on the concept of “light engine modularization”, making STELLAR series possible to
be more flexible, more practical and expandable.

Shape
(Baffle Size)



Round
2.8"



Round
3.5"

Mountings



Recessed
Trim



Recessed
Trimless



Millwork

Light distributions



Adjustable

STELLAR
recessed downlights



LEA-01



LEA-14



LEA-14-DW
Dim To Warm
(ETL pending)



LEA-15



LEA-15-DW
Dim To Warm



ACOT-84-AM

Round

85
Adjustable

85
Adjustable
Snoot

3.5"
Adjustable

3.5"
Adjustable
Snoot

Trim



Trimless



Millwork





Color match



Prevent light leak

STELLAR can be rotated 355 degrees, swaying at various angles to illuminate the display items. Adding an extra component to the fixture prevent people seeing through the fixture a very tender thought from our designer

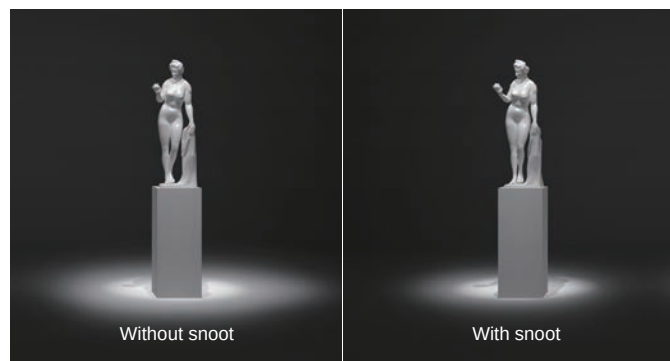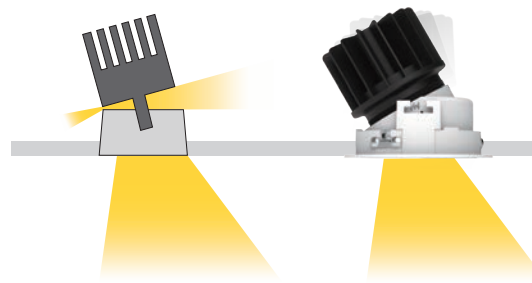


Adding snoot to reduce field angle as much as possible, and more focusing on the object.

STELLAR-2.8"

Adjustable

round

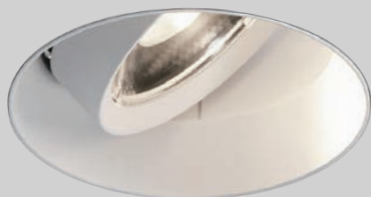

Specification

2700 K, 3000 K, 4000 K,

CRI $\geq$ 90

DALI, TRIAC, 1-10V

Types

	8W	20W/18W
Trim	 3.46" (88mm)	 3.46" (88mm)
Trimless	 2.93" (74mm)	 2.93" (74mm)

Colours

Bezel :			
	Black	White	
Baffle :			
	Black	White	
Snoot :			
	Black	White	Mix

Beam Angle



15°/24°/36°/50° (Lens)





STELLAR-85-RTA1



Article number	2118.582-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable



⊖ Cut out : 3 5/32" (80mm)



STELLAR-85-RTAS1



Article number	2118.583-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable



⊖ Cut out : 3 5/32" (80mm)

Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glass


STELLAR-85-RTLA1



Article number	2118.670F-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable

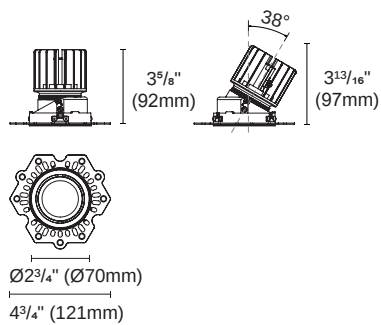

⌀ Cut out : 3 5/32" (80mm)


STELLAR-85-RTLAS1



Article number	2118.671F-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable

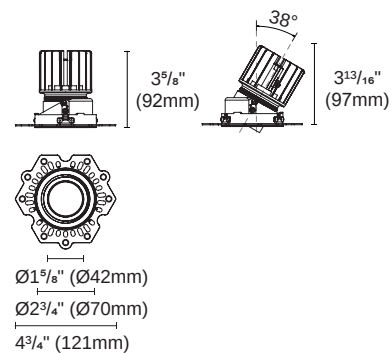

⌀ Cut out : 3 5/32" (80mm)

Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassEP85-TL-WD
Millwork



STELLAR-85-RTA2




Article number	2218.143-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18W
Current	450 (mA)	400 (mA)
Delivered Lumen	1405 (lm)	1270 (lm)
Beam Angle	30°/35°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable



⌀ Cut out : 3 5/32" (80mm)

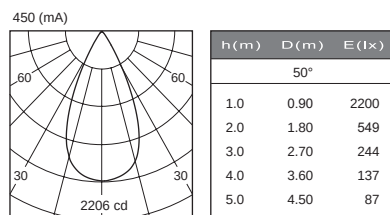



STELLAR-85-RTAS2




Article number	2218.144-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18W
Current	450 (mA)	400 (mA)
Delivered Lumen	1193 (lm)	1081 (lm)
Beam Angle	25°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable



⌀ Cut out : 3 5/32" (80mm)

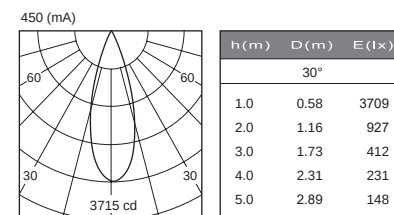

Accessories

ACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glass




STELLAR-85-RTLA2



Article number	2218.216F-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18W
Current	450 (mA)	400 (mA)
Delivered Lumen	1405 (lm)	1270 (lm)
Beam Angle	30°/35°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable

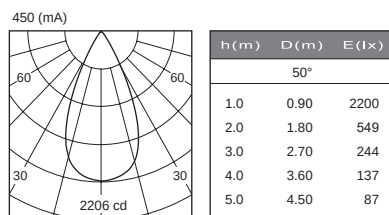
 Cut out : 3⁵/₃₂" (80mm)




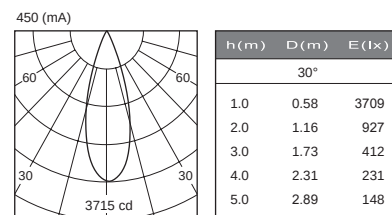
STELLAR-85-RTLAS2



Article number	2218.217F-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18W
Current	450 (mA)	400 (mA)
Delivered Lumen	1193 (lm)	1081 (lm)
Beam Angle	25°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	




Dimmable


 Cut out : 3⁵/₃₂" (80mm)


Accessories

ACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glassEP85-TL-WD
Millwork

STELLAR-3.5" round
Adjustable

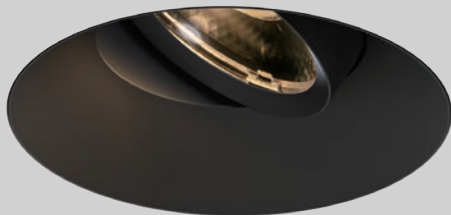

Specification

2700 K, 3000 K, 4000 K,
Dim to Warm
CRI ≥ 90
DALI, TRIAC, 1-10V

Types

	21W/18W	30W/25W
Trim	 4.41" (112mm)	 4.41" (112mm)
Trimless	 3.73" (95mm)	 3.73" (95mm)

Colours

Bezel :			
	Black	White	
Baffle :			
	Black	White	
Snoot :			
	Black	White	Mix

Beam Angle



30°/40°/50°/55° (Lens)




STELLAR can be rotated 355 degrees, swaying at various angles to illuminate the display items.




STELLAR110-RTA1



Article number	2118.192-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1580 (lm)
Beam Angle	20°/30°/45°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2118.192-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	34-1210 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable



Ⓢ Cut out : 3³⁰/₃₂" (100mm)


STELLAR110-RTAS1



Article number	2118.193-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1517 (lm)
Beam Angle	20°/30°/45°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2118.193-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	34-1055 (lm)
Beam Angle	20°/25°/36°/45° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable

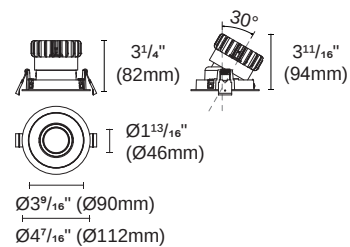

Ⓢ Cut out : 3³⁰/₃₂" (100mm)


Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glass


STELLAR110-RTLA1



Article number	2118.668F-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1580 (lm)
Beam Angle	20°/30°/45°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2118.668F-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	34-1210 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable

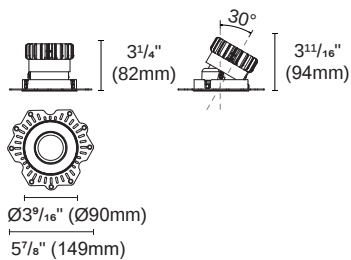

⌀ Cut out : 3³⁰/₃₂" (100mm)


STELLAR110-RTLAS1



Article number	2118.669F-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1517 (lm)
Beam Angle	20°/30°/45°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC
Article number	2118.669F-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	34-1055 (lm)
Beam Angle	20°/25°/36°/45° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable

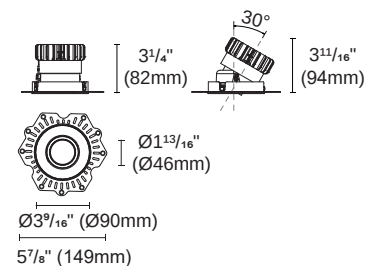

⌀ Cut out : 3³⁰/₃₂" (100mm)

Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassEP110-TL-WD
Millwork



STELLAR110-RTA2



Article number	2118.192-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2257 (lm)	-
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable

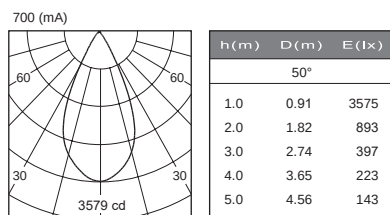
 Cut out : 3³⁰/₃₂" (100mm)



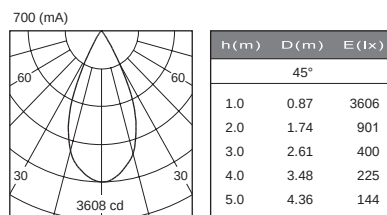
STELLAR110-RTAS2



Article number	2118.193-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2034 (lm)	-
Beam Angle	25°/38°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable


 Cut out : 3³⁰/₃₂" (100mm)


Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glass

STELLAR110-RTLA2





Article number 2118.668F-ACOT-84-AM

	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2257 (lm)	-
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Dimmable

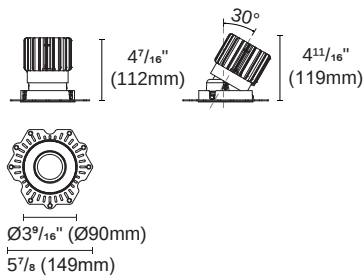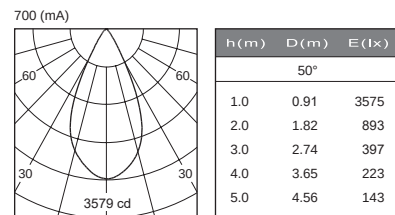
 Cut out : 3³⁰/₃₂" (100mm)


STELLAR110-RTLAS2





Article number 2118.669F-ACOT-84-AM

	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2034 (lm)	-
Beam Angle	25°/38°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	




Dimmable

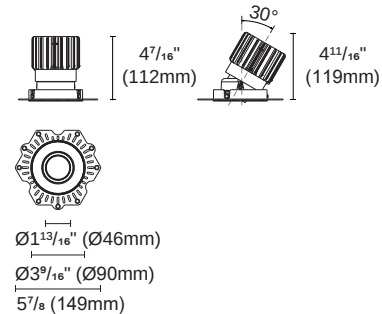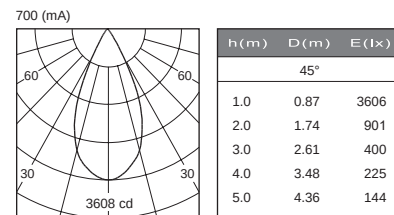
 Cut out : 3³⁰/₃₂" (100mm)


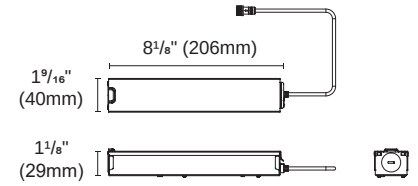
Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassEP110-TL-WD
Millwork


INSTALLATION OPTIONS




ACCG-28B-PUP10A-1WMC-350 0/1-10V
 ACCG-28B-PUP10D-1WMC-350 DALI
 ACCG-28B-PUP10T-1LMC-350 TRIAC
 for STELLAR85-2.8" (8W)
 Type: Gear box



Internal space dimension:
 L 4 1/4" (108mm) X W 1 3/8" (35mm) X H 1" (26mm)




ACCG-22B-PUP20A-1WMC 0/1-10V
 ACCG-22B-PUP20D-1WMC DALI
 ACCG-22B-PUP20T-1LMC TRIAC
 for STELLAR85-2.8" (18-20W)
 STELLAR110-3.5" (18-21W)
 Type: Gear box

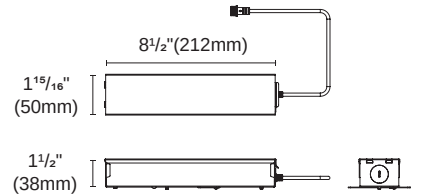

Internal space dimension:
 L 8 1/4" (209mm) X W 1 7/8" (48mm) X H 1 5/16" (33mm)



ACCG-16B-PUP40A-1WMC-850 0/1-10V
 ACCG-16B-PUP40D-1WMC-850 DALI
 ACCG-16B-PUP40T-1LMC-850 TRIAC
 for STELLAR110-3.5" (25-30W)
 Type: Gear box

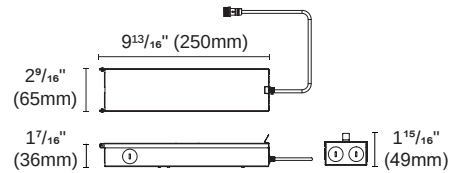


Internal space dimension:
 L 9 13/16" (250mm) X W 2 1/2" (64mm) X H 1 5/16" (34mm)


* For single fixture connection only, not available for parallel multiple connection



ACCG-35B-PUP20A-1WMC 0/1-10V
 ACCG-35B-PUP20D-1WMC DALI
 ACCG-35B-PUP20T-1LMC TRIAC
 for STELLAR85-2.8"
 STELLAR110-3.5" (18-21W)
 Type: Gear box

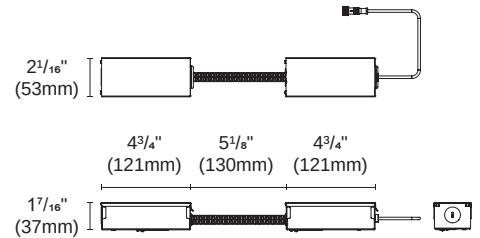



* Use with low ceilings

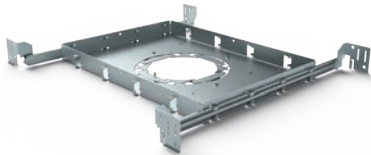

ACCH-12-80 for STELLAR85-2.8"
 Type: New construction plate

Cut out:


Round : $\varnothing 3^{5/32}$ " ($\varnothing 80$ mm)
 Square : $\square 3^{5/32}$ " ($\square 80$ mm)
 Also for Millwork

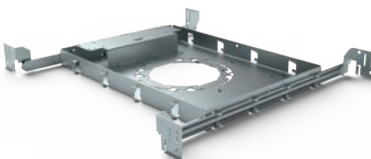


ACCH-12H-100 for STELLAR110-3.5"
 Type: New construction plate

Cut out:

Round : $\varnothing 3^{30/32}$ " ($\varnothing 100$ mm)
 Square : $\square 3^{30/32}$ " ($\square 100$ mm)
 Also for Millwork



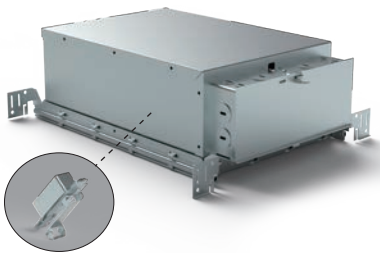

Driver is secured on patent designed bracket

ACCH-12D-80-PUP20A-1WMC 0/1-10V
 ACCH-12D-80-PUP20D-1WMC DALI
 ACCH-12D-80-PUP20T-1LMC TRIAC
 for STELLAR85-2.8"


Type: IC Box

Cut out:

Round : $\varnothing 3^{5/32}$ " ($\varnothing 80$ mm)

Square : $\square 3^{5/32}$ " ($\square 80$ mm)

Also for Millwork

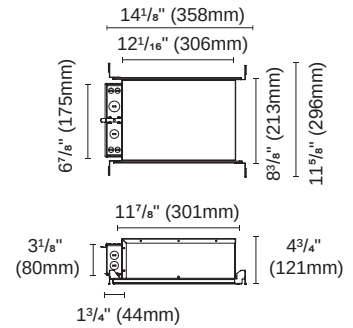

ACCH-12B-100-PUP20A-1WMC 0/1-10V
 ACCH-12B-100-PUP20D-1WMC DALI
 ACCH-12B-100-PUP20T-1LMC TRIAC
 for STELLAR110-3.5" (18-21W)


Type: IC Box

Cut out:

Round : $\varnothing 3^{30/32}$ " ($\varnothing 100$ mm)

Square : $\square 3^{30/32}$ " ($\square 100$ mm)

Also for Millwork

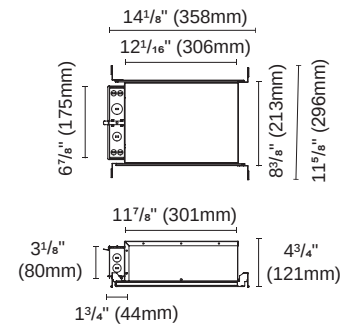

ACCH-7B-100-PUP40A-1WMC-850 0/1-10V
 ACCH-7B-100-PUP40D-1WMC-850 DALI
 ACCH-7B-100-PUP40T-1LMC-850 TRIAC
 for STELLAR110-3.5" (25W)


Type: IC Box

Cut out:

Round : $\varnothing 3^{30/32}$ " ($\varnothing 100$ mm)

Square : $\square 3^{30/32}$ " ($\square 100$ mm)

Also for Millwork

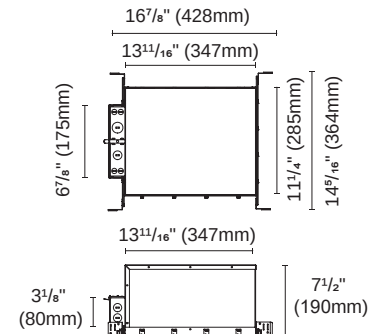

ACCI-3

Type: Emergency battery holder


For BillDa emergency led driver-

Model NO. BLD-HM08D-YYY

BLD-HM15D-YYY

BLD-HM20D-YYY

BLD-HM25D-YYY

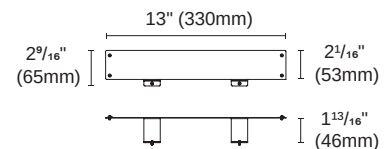

ACCI-5

Type: Remodel stand



FARFALLA SERIES (AM)



FARFALLA (AM)

With the high-performance optical elements and elegant round downlight, the FARFALLA series is impressive for its simplicity and flexibility. Supply by changeable collars; FARFALLA elements in various colors can create an excellent atmosphere.

The FARFALLA series not only provides a comfortable illumination experience but also a stylish decoration for the interior. The space transforms with either subtle or dramatic contrasts.

Shape
(Baffle Size)



Round
2"



Round
2.8"



Round
4.4"

Mountings



Recessed
Trim



Recessed
Trimless



Millwork

Light distributions



Fixed

FARFALLA

recessed downlights



	2" Fixed	2.8" Fixed	4.4" Fixed
Round			
Trim A			
Trim B			
Trim C			
Trimless			
Millwork			

Color available

● Black ● White

Custom collar colours:

● Brass ● Copper ● Satin Nickel

(MOQ is required for custom colours)



RECESSED/ SURFACE All In One

With the ingenious mechanics, FARFALLA achieves to ensure the display effect is highlighted can produce a smooth and mild atmosphere from top to bottom. FARFALLA could adjust the application depend on different environment, it could be surface downlight if you add the collar and recessed without collar, customized color of collar is also available, high efficiency low glare and a comfortable visual experience can be precisely created.


FARFALLA 50 (2") round
fixed



Specification

3000 K
CRI ≥ 90
TRIAC, 1-10V

Types



Colours

Baffle :  
Black White

Collar :  
Black White

Custom collar colours:

  
Brass Copper Satin Nickel

(MOQ is required for custom colours)

Beam Angle



120°/25°/40°/50° (Lens)



Recessed trimless

FARFALLA-50-RTL1






Article number	2318.203-LEA-09B
LED Consumption	10W
Current	500 (mA)
Delivered Lumen	758 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable


TRIAC	1-10V
-------	-------

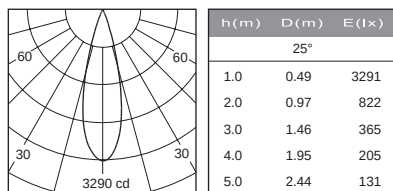
 Cut out : 1²⁸/₃₂" (45mm)


FARFALLA-50-RTL1F






Article number	2318.203F-LEA-09B
LED Consumption	10W
Current	500 (mA)
Delivered Lumen	758 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable

TRIAC	1-10V
-------	-------

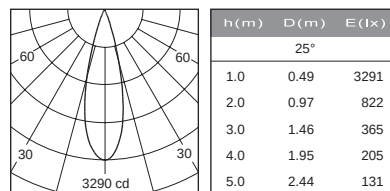
 Cut out : 2¹²/₃₂" (60mm)


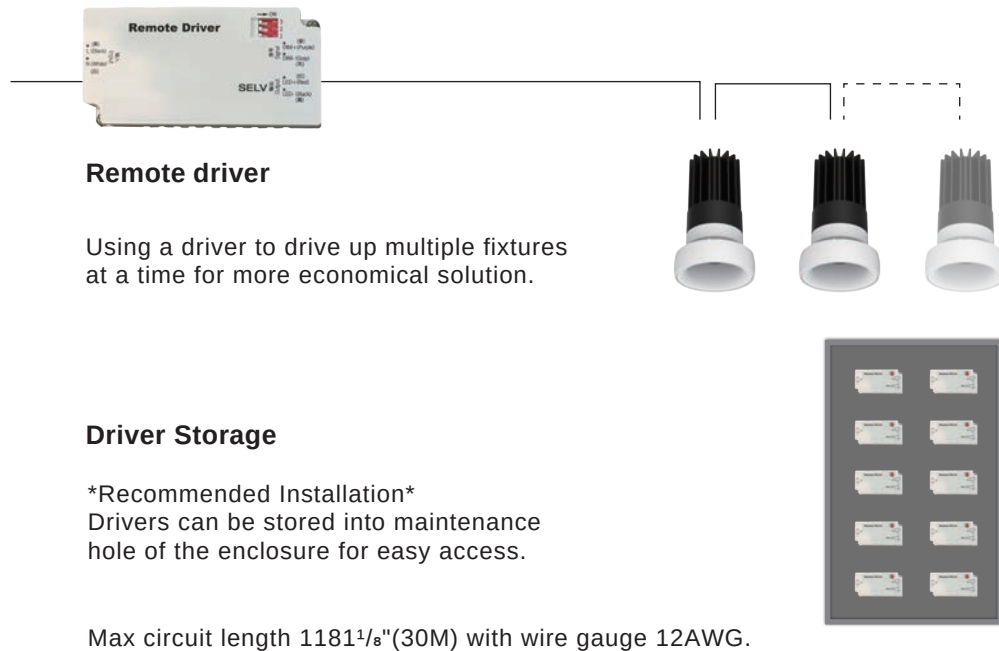
Accessories

ACHO-18
honeycomb louver
+PC sheetSG-002
Striped GlassFA50-COLLAR
Collar

Constant current

1 to multiple fixtures


Rise's FARFALLA 2" are compatible with all common lighting controls; choose from Traic, 0-10V dimming.




Optional driver available

	KIG-040-DW Type: Driver	Triac / 0-10V/1-10V/Potentiometer/10V PWM 5 in 1 Dimmable LED driver Multi-current output series 40W For FARFALLA 50 (2") 1~3T		PUP10A-1WMC-700 Type: Driver	0/1-10V Output: 500mA/2-20V/10W 400mA/2-21V/8.4W For FARFALLA 50 (2") 1T
	PUP20A-1WMC Type: Driver	0/1-10V Output: 500mA/9-40V/20W 400mA/9-45V/18W For FARFALLA 50 (2") 1~2T		PUP10T-1LMC-700 Type: Driver	Triac Output: 500mA/2-20VDC/10W 400mA/2-21VDC/8.4W For FARFALLA 50 (2") 1T
	PUP20T-1LMC Type: Driver	Triac Output: 500mA/9-40V/20W 400mA/9-45V/18W For FARFALLA 50 (2") 1~2T		PUP10D-1WMC-700 Type: Driver	Dali Output: 500mA/2-20V/10W 400mA/2-21V/8.4W For FARFALLA 50 (2") 1T
	PUP20D-1WMC Type: Driver	Dali Output: 500mA/9-40V/20W 400mA/9-45V/18W For FARFALLA 50 (2") 1~2T		ACOT-106 Type: Quick connector	

NON-IC

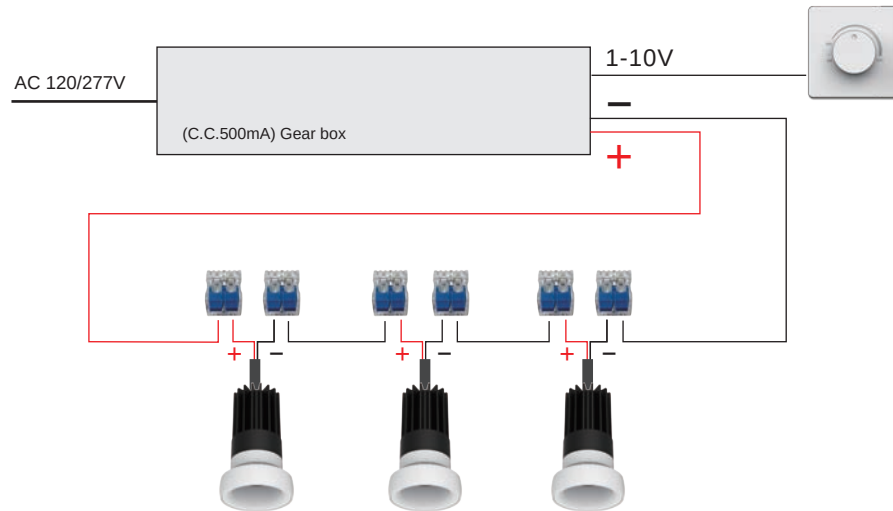

IC-BOX

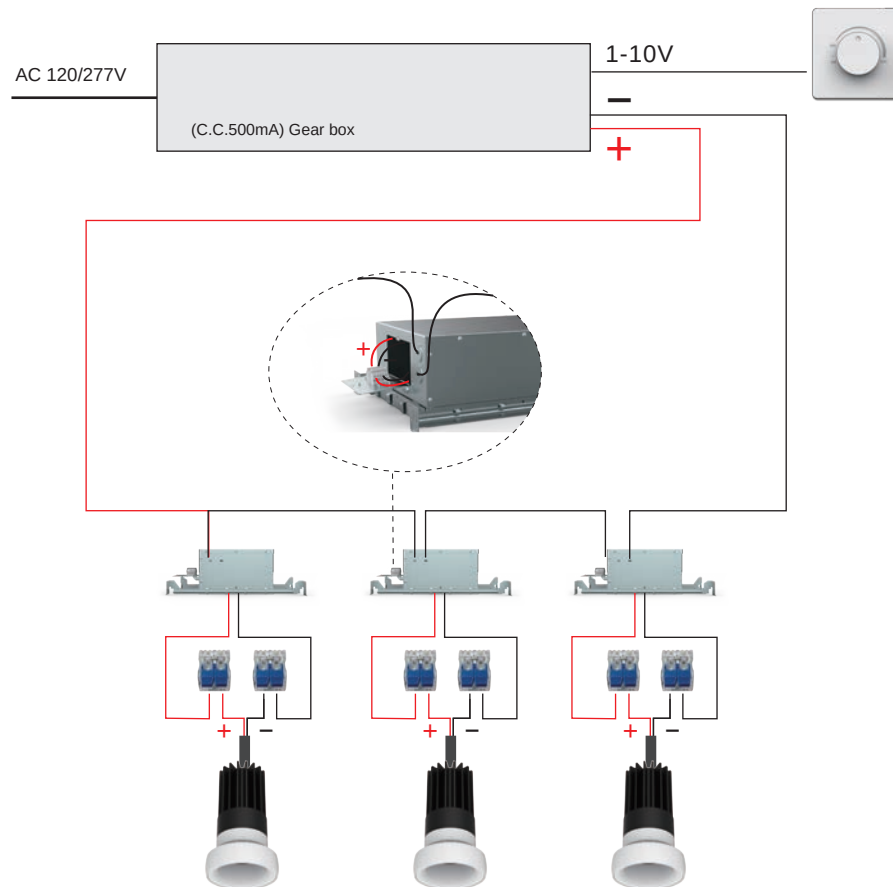

FARFALLA 85 (3.4") round
fixed




1 1/16" (23mm)

Specification

3000 K
CRI ≥ 90
913 lm
DALI, TRIAC, 1-10V

Types

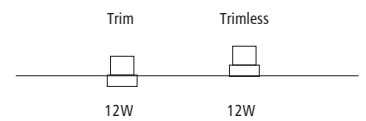

Colours

Baffle :  Black  White

Collar :  Black  White

Custom collar colours:



Brass



Copper



Satin Nickel

(MOQ is required for custom colours)

Beam Angle



15°/24°/36°/50° (Lens)



Recessed trimless




FARFALLA-85-RTF1




Article number	2218.207-LEA-01
Fixture Consumption	12W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable


 Cut out : 2³⁰/₃₂" (75mm)


FARFALLA-85-RTL1

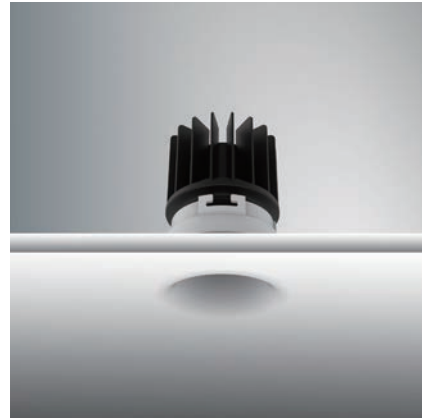


Article number	2218.207F-LEA-01
Fixture Consumption	12W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable


 Cut out : 3⁷/₃₂" (82mm)

Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-34
Collar


FARFALLA A-85-RTF



Article number	2418.209-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18W
Current	450 (mA)	400 (mA)
Lumen	1825 (lm)	1642 (lm)
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable




⌀ Cut out : 3 5/32" (80mm)

Accessories



ACSG-4 Striped glass ACHO-5 Honeycomb louver ACDS-4 Diffusion sheet




ACWG-5 Woven glass ACOT-34 Collar


FARFALLA B-85-RTF



Article number	2418.130-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18W
Current	450 (mA)	400 (mA)
Lumen	1825 (lm)	1642 (lm)
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable



⌀ Cut out : 3 5/32" (80mm)

Accessories




ACSG-4 Striped glass ACHO-5 Honeycomb louver ACDS-4 Diffusion sheet




ACWG-5 Woven glass


FARFALLA B-85-RTL

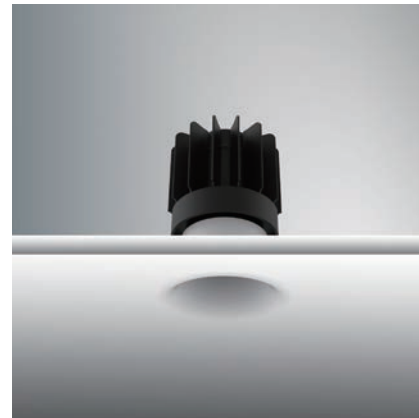

Article number	2418.210F-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18W
Current	450 (mA)	400 (mA)
Lumen	1825 (lm)	1642 (lm)
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable




⌀ Cut out : 3 5/32" (80mm)

Accessories



ACSG-4 Striped glass ACHO-5 Honeycomb louver ACDS-4 Diffusion sheet



ACWG-5 Woven glass EP85-TL-WD Millwork


FARFALLA 110 (4.4") round
fixed



Specification

3000 K
CRI ≥ 90
913 lm
DALI, TRIAC, 1-10V

Types



Colours

Baffle :  Black  White

Collar :  Black  White

Custom collar colours:

 Brass  Copper  Satin Nickel

(MOQ is required for custom colours)

Beam Angle



15°/24°/36°/50° (Lens)



Recessed trimless



FARFALLA-110-RTF1




Article number	2318.223-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Lumen	2004 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2318.223-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Lumen	34-1507 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable




⌀ Cut out : 3³⁰/₃₂" (100mm)

Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassFA110-COLLAR
Collar

FARFALLA-110-RTL1

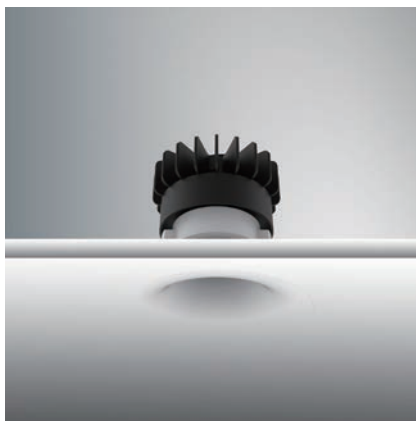

Article number	2318.223F-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Lumen	2004 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC


Article number	2318.223F-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Lumen	34-1507 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable



Ø4⁹/₁₆" (Ø116mm)



⌀ Cut out : 5¹/₃₂" (128mm)

Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glass

FARFALLA-110-RTL1F



Article number	2318.224F-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Lumen	2004 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2318.224F-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Lumen	34-1507 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable



Ø3⁹/₁₆" (Ø90mm)
5⁷/₈" (149mm)

⌀ Cut out : 3³⁰/₃₂" (100mm)

Accessories


SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassEP110-TL-WD
Millwork

FARFALLA-110-RTF1



Article number	2318.223-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Lumen	2873 (lm)	-
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	

FARFALLA-110-RTL1

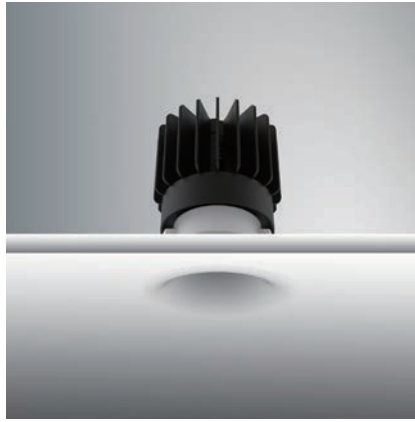


Article number	2318.223F-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Lumen	2873 (lm)	-
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	


FARFALLA-110-RTL1




Article number	2318.224F-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Lumen	2873 (lm)	-
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	






Dimmable



Dimmable



Dimmable


 Cut out : 3³⁰/₃₂" (100mm)

 Cut out : 5¹/₃₂" (128mm)

 Cut out : 3³⁰/₃₂" (100mm)

Accessories



Accessories



Accessories





INSTALLATION OPTIONS

Conforms to UL STD. 2108
Certified to CSA STD.C22.2 NO.9




KIG-040-DWJ
Triac/Phase, 0-10V, 1-10V, Potentiometer,
10V PWM 5 in 1 dimming
40W 1~3T
for FARFALLA50-2"
Type: Gear box

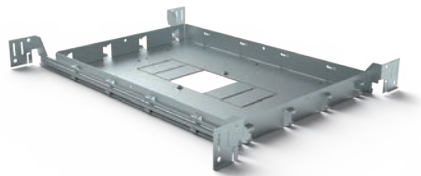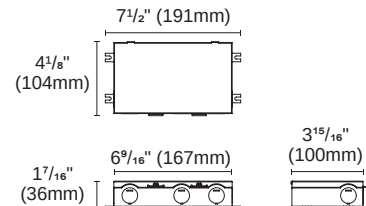


* Need to match the cutout accessories

ACCH-12-61X181 + ACCI-10-R45-R60
for FARFALLA50-2" both trim & trimless
Cut out:
Round : $1^{25/32}$ " (45mm)
Round : $2^{12/32}$ " (60mm)




* Need to match the cutout accessories

ACCH-12G-61X181 + ACCI-10-R45-R60
Cut out:
Round : $1^{25/32}$ " (45mm)
Round : $2^{12/32}$ " (60mm)

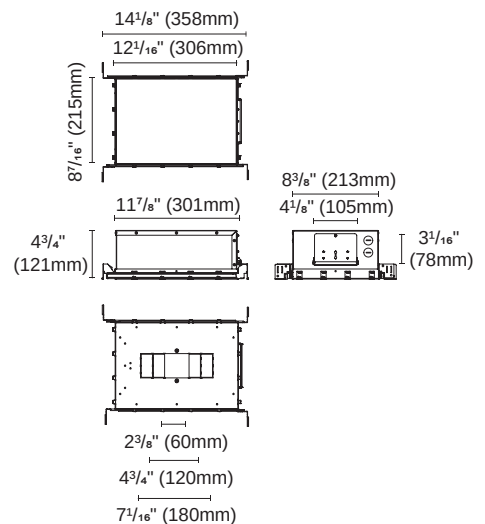


Cutout accessories



ACCI-10-R45-R60
for FARFALLA50-2" both trim & trimless
Cut out:
Round : $1^{25/32}$ " (45mm)
Round : $2^{12/32}$ " (60mm)


INSTALLATION OPTIONS

Conforms to UL STD. 1598
Certified to CSA STD.C22.2 NO.250.0




ACCG-28B-PUP10A-1WMC-350 0/1-10V
ACCG-28B-PUP10D-1WMC-350 DALI
ACCG-28B-PUP10T-1LMC-350 TRIAC
for FARFALLA85-3.4" (12W)

Type: Gear box

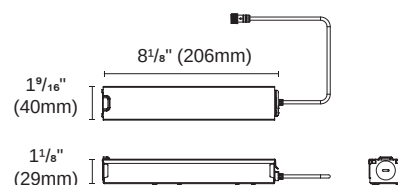


Internal space dimension:
L 4 1/4" (108mm) X W 1 3/8" (35mm) X H 1" (26mm)



ACCG-22B-PUP20A-1WMC 0/1-10V
ACCG-22B-PUP20D-1WMC DALI
ACCG-22B-PUP20T-1LMC TRIAC
for FARFALLA85-2.8" (18-21W)
FARFALLA110-4.4" (18-21W)

Type: Gear box

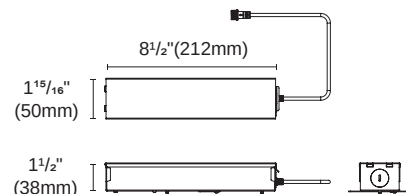


Internal space dimension:
L 8 1/4" (209mm) X W 1 7/8" (48mm) X H 1 1/16" (33mm)



ACCG-35B-PUP20A-1WMC 0/1-10V
ACCG-35B-PUP20D-1WMC DALI
ACCG-35B-PUP20T-1LMC TRIAC
for FARFALLA85-2.8"
FARFALLA110-3.5" (18-21W)

Type: Gear box

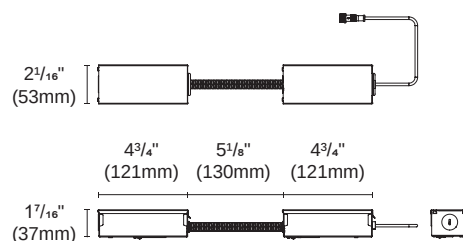


* Use with low ceilings



ACCG-16B-PUP40A-1WMC-850 0/1-10V
ACCG-16B-PUP40D-1WMC-850 DALI
ACCG-16B-PUP40T-1LMC-850 TRIAC
for FARFALLA110-4.4" (25-30W)

Type: Gear box

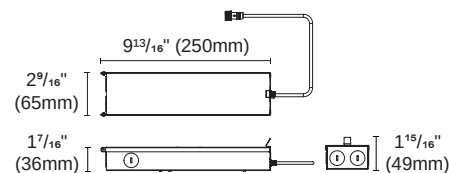


Internal space dimension:
L 9 13/16" (250mm) X W 2 1/2" (64mm) X H 1 5/16" (34mm)

* For single fixture connection only, not available for parallel multiple connection

INSTALLATION OPTIONS

Conforms to UL STD. 1598

Certified to CSA STD.C22.2 NO.250.0



ACCH-12-R75-R85



for FARFALLA85-3.4" both trim & trimless

Type: New construction plate

Cut out:

Round : $2\frac{30}{32}$ " (75mm)

Round : $3\frac{11}{32}$ " (85mm)

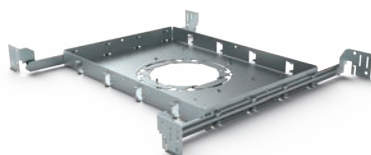

ACCH-12-80



for FARFALLA85-2.8" both trim & trimless

Type: New construction plate

Cut out:

Round : $\varnothing 3\frac{5}{32}$ " ($\varnothing 80$ mm)

Also for Millwork

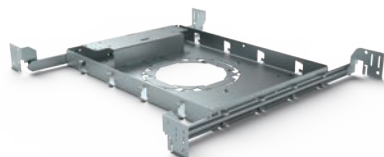

ACCH-12H-100


for FARFALLA110-4.4" trim

Type: New construction plate

Cut out:

Round : $3\frac{30}{32}$ " (100mm)

Also for Millwork




ACCH-12H-128


for FARFALLA110-4.4" trimless

Type: New construction plate

Cut out:

Round : $5\frac{1}{32}$ " (128mm)



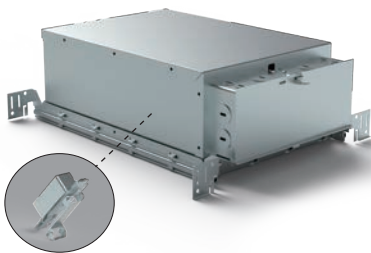

Driver is secured on patent designed bracket

ACCH-12D-80-PUP20A-1WMC 0/1-10V
ACCH-12D-80-PUP20D-1WMC DALI
ACCH-12D-80-PUP20T-1LMC TRIAC


for FARFALLA85-2.8"

Type: IC Box

Cut out:

Round : $\varnothing 3^{5/32}$ " ($\varnothing 80$ mm)

Also for Millwork



ACCH-12B-100-PUP20A-1WMC 0/1-10V
ACCH-12B-100-PUP20D-1WMC DALI
ACCH-12B-100-PUP20T-1LMC TRIAC


for FARFALLA110-3.5" (18-21W)

Type: IC Box

Cut out:

Round : $\varnothing 3^{30/32}$ " ($\varnothing 100$ mm)

Also for Millwork




ACCH-12B-128-PUP20A-1WMC 0/1-10V
ACCH-12B-128-PUP20D-1WMC DALI
ACCH-12B-128-PUP20T-1LMC TRIAC

for FARFALLA110-4.4" trimless (18-21W)

Type: IC Box

Cut out:

Round : $5^{1/32}$ " (128mm)

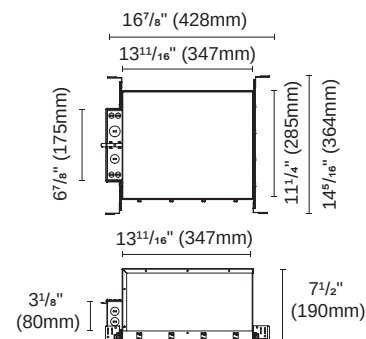

ACCH-7B-100-PUP40A-1WMC-850 0/1-10V
ACCH-7B-100-PUP40D-1WMC-850 DALI
ACCH-7B-100-PUP40T-1LMC-850 TRIAC


for STELLAR110-3.5" (25W)

Type: IC Box

Cut out:

Round : $\varnothing 3^{30/32}$ " ($\varnothing 100$ mm)

Also for Millwork

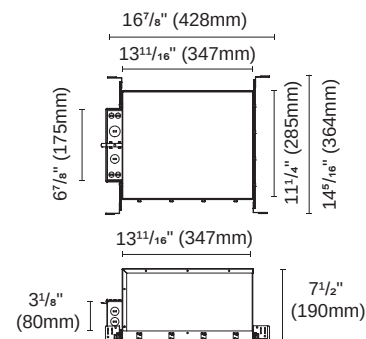

ACCH-7B-125-PUP40A-1WMC-850 0/1-10V
ACCH-7B-125-PUP40D-1WMC-850 DALI
ACCH-7B-125-PUP40T-1LMC-850 TRIAC

for FARFALLA110-4.4" trimless (25W)

Type: IC Box

Cut out:

Round : $5^{1/32}$ " (128mm)



ACCI-3

Type: Emergency battery holder


For BillDa emergency led driver-

Model NO. BLD-HM08D-YYY


BLD-HM15D-YYY

BLD-HM20D-YYY

BLD-HM25D-YYY



BRAVO SERIES (AM)

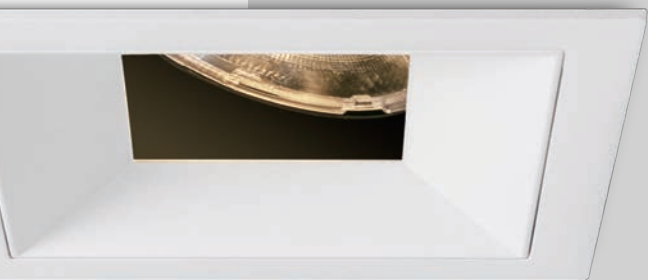

BRAVO (AM)

The full range of recessed LED downlights with their compact tapered design provides excellent visual comfort, energy efficiency, easy installation and good architectural integration.

The most advanced LED modules on the market are installed to ensure reliable, quality lighting. Full range of optics with 30 degree cut-off angle and a variety of mounting solutions to meet any lighting need, even in double-height ceilings, in any material and environment. The adjustable BRAVO also features a precise and reliable tilt and rotation system, even when the product is already in place.

Shape
(Baffle Size)



Round
2.8"



Square
2.8"

Mountings



Recessed
Trim



Recessed
Trimless

Light distributions



Adjustable





Cone baffle

It is a multifunctional accent light that can highlight a single object or architectural element.

Available in fixed and adjustable versions, while the adjustable version can be precisely set to tilt at an angle of up to 30 degrees, so the light will be emitted exactly where you want it.

There are also different accessories to choose from, adding more flexibility and freedom for lighting designers. Suitable for hotels and residences.

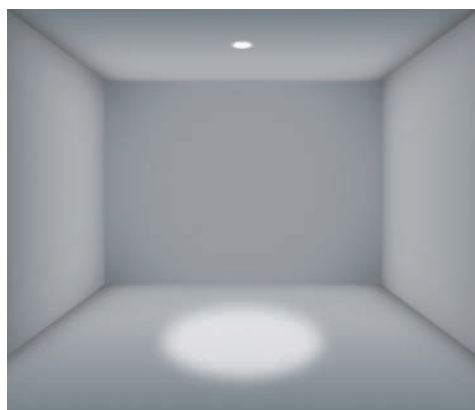
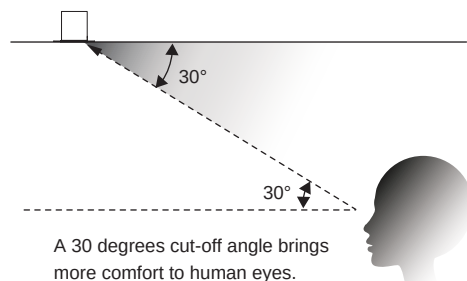


Pinhole baffle

It is a multifunctional accent light that can highlight a single object or architectural element. To further reduce the visual impact on the ceiling, the pin hole baffle is used to bring the luminaire flush with the ceiling for added glare protection and a 40 degree cut-off angle.

Fixed and adjustable functions are available, while the adjustable version can be precisely set to a tilt angle of up to 30 degrees, so the light will be emitted exactly where you want it.

There are also different accessories to choose from, adding more flexibility and freedom for lighting designers. Suitable for hotels and residences.


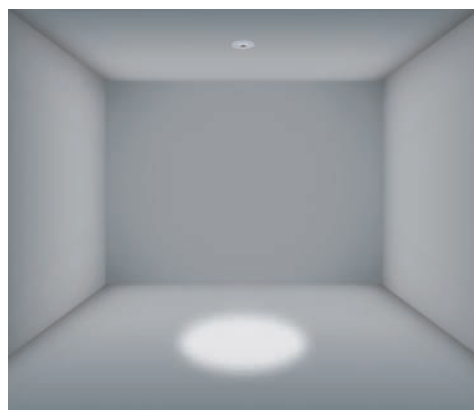
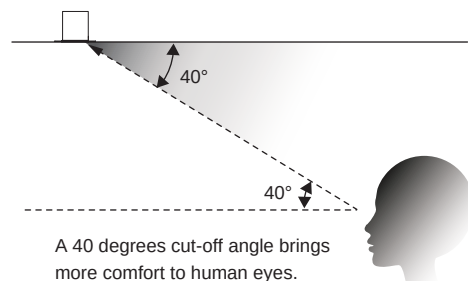




Pinhole baffle
Suitable for hotels, restaurants, residences,
Karaoke rooms and other low Angle-adjustable
accent lighting for small spaces.

BRAVO
adjustable

round / square

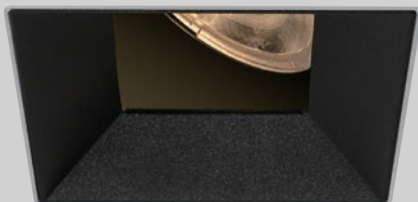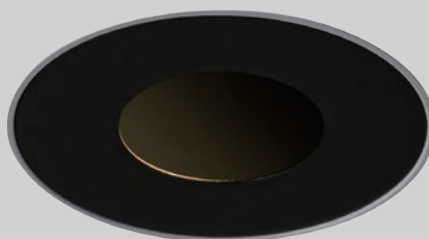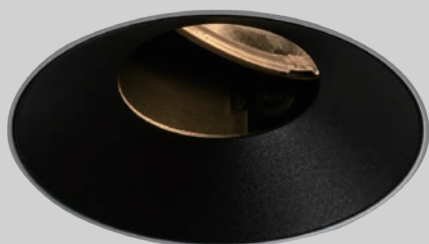



Specification

3000 K

CRI $\geq$ 90

DALI, TRIAC, 1-10V

Types (round & square)



Colours

Bezel :  Black  White

Baffle :  Black  White

Beam Angle



15°/24°/36°/50° (Lens)


NON-IC




BRAVO-85-RTA3



Article number	2218.139-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18W
Current	450 (mA)	400 (mA)
Lumen	1825 (lm)	1642 (lm)
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable

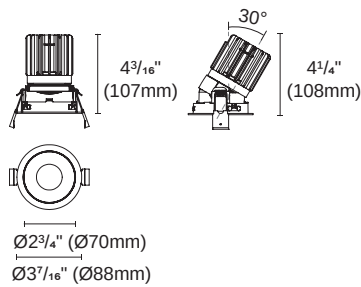

Cut out : 3 5/32" (80mm)


BRAVO-85-RTA4



Article number	2218.140-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Lumen	1825 (lm)	1642 (lm)
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable

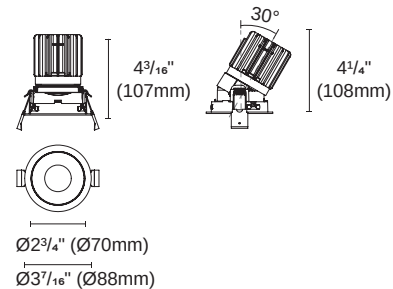

Cut out : 3 5/32" (80mm)

Accessories

ACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glass



BRAVO-85-RTLA3



Article number	2218.212F-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18W
Current	450 (mA)	400 (mA)
Lumen	1825 (lm)	1642 (lm)
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable


 Cut out : 3⁵/₃₂" (80mm)



BRAVO-85-RTLA4



Article number	2218.213F-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Lumen	1825 (lm)	1642 (lm)
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	




Dimmable


 Cut out : 3⁵/₃₂" (80mm)

Accessories

ACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glass


BRAVO-85-STA3

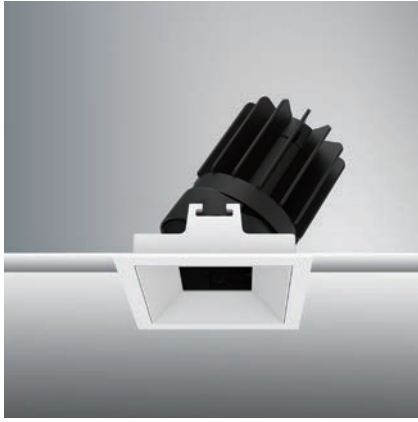

Article number	2218.141-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Lumen	1825 (lm)	1642 (lm)
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable

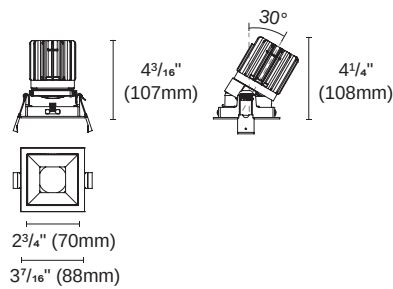
 Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)


BRAVO-85-STA4



Article number	2218.142-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Lumen	1825 (lm)	1642 (lm)
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable

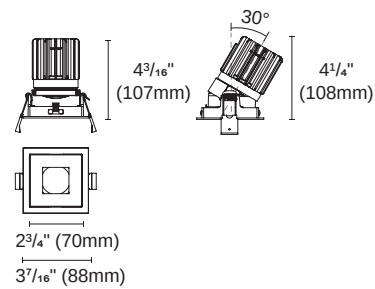
 Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)

Accessories

ACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glass


BRAVO-85-STLA3



Article number	2218.214A-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Lumen	1825 (lm)	1642 (lm)
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable

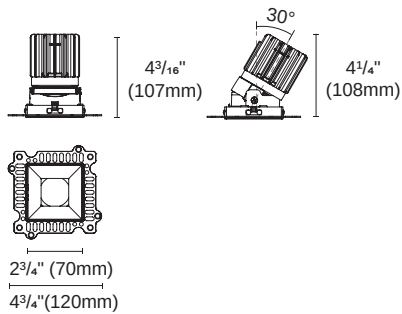
 Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)


BRAVO-85-STLA4



Article number	2218.215A-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Lumen	1825 (lm)	1642 (lm)
Beam Angle	15°/24°/36°/50° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	



Dimmable


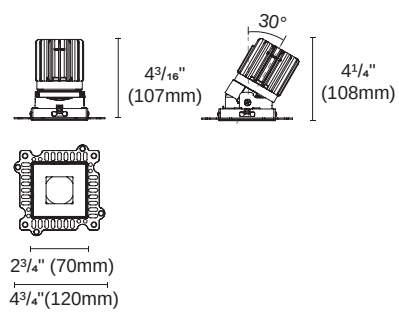

 Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)

Accessories

ACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glass

BRAVO
adjustable



round / square

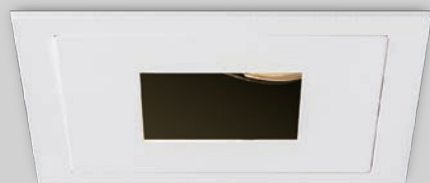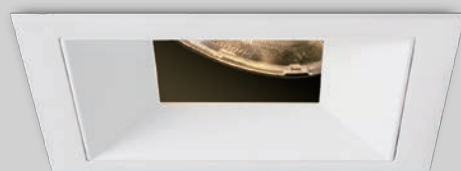

Specification

3000 K
CRI ≥ 90
DALI, TRIAC, 1-10V

Types (round & square)



Colours

Bezel :  
Black White

Baffle :  
Black White

Beam Angle



15°/24°/36°/50° (Lens)






BRAVO-85-RTA1



Article number	2118.549-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable

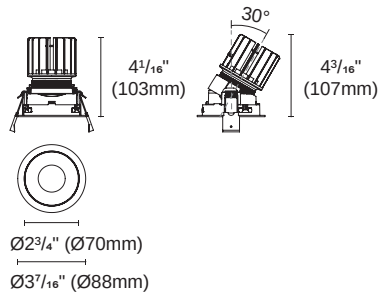
 Cut out : 3⁵/₃₂" (80mm)


BRAVO-85-RTA2



Article number	2118.550-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable

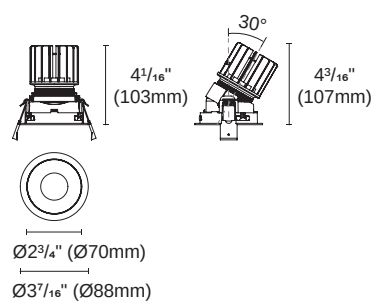
 Cut out : 3⁵/₃₂" (80mm)

Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glass


BRAVO-85-RTLA1



Article number	2118.650F-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable

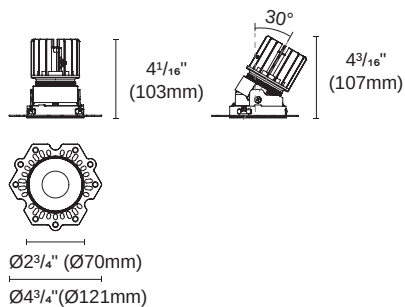

⌀ Cut out : 3 5/32" (80mm)


BRAVO-85-RTLA2



Article number	2118.651F-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable

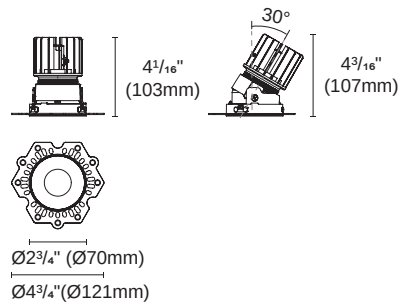

⌀ Cut out : 3 5/32" (80mm)


Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glass


BRAVO-85-STA1



Article number	2118.552-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable

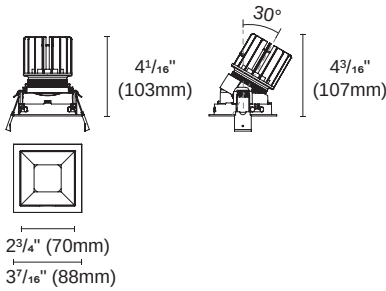


Cut out : 3 5/32"X3 5/32" (80X80mm)


BRAVO-85-STA2



Article number	2118.562-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable

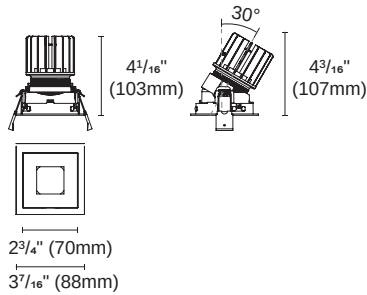

Cut out : 3 5/32"X3 5/32" (80X80mm)

Accessories

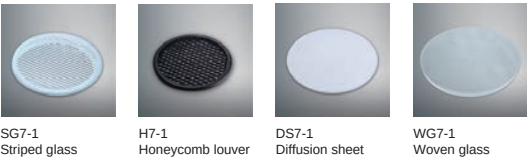


BRAVO-85-STLA1



Article number	2118.653A-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable

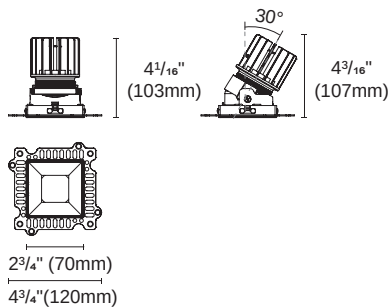
 Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)


BRAVO-85-STLA2



Article number	2118.658A-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable

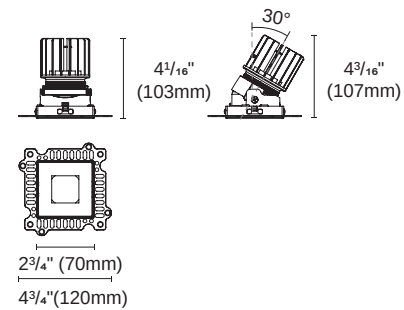
 Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)


Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glass

INSTALLATION OPTIONS




ACCG-28B-PUP10A-1WMC-350 0/1-10V
ACCG-28B-PUP10D-1WMC-350 DALI
ACCG-28B-PUP10T-1LMC-350 TRIAC
for BRAVO-2.8" round / square (8W)
Type: Gear box

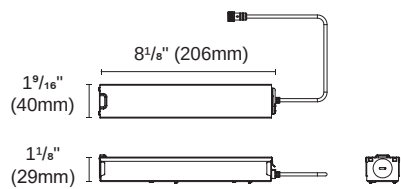


Internal space dimension:
L 4 3/4" (108mm)X W 1 3/8" (35mm)X H 1" (26mm)




ACCG-22B-PUP20A-1WMC 0/1-10V
ACCG-22B-PUP20D-1WMC DALI
ACCG-22B-PUP20T-1LMC TRIAC
for BRAVO-2.8" round / square (20W)
Type: Gear box

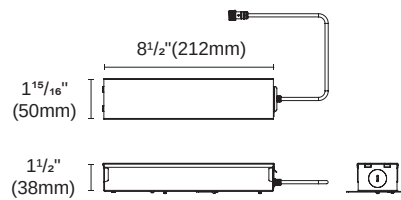

Internal space dimension:
L 8 3/4" (209mm)X W 1 7/8" (48mm)X H 1 5/16" (33mm)

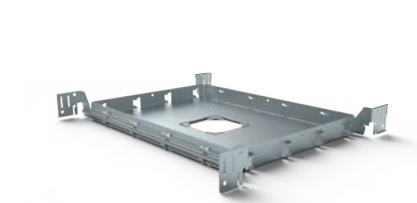


ACCH-12-80
for BRAVO-2.8" round / square (8W / 20W)
Type: New construction plate




ACCI-5
Type: Remodel stand



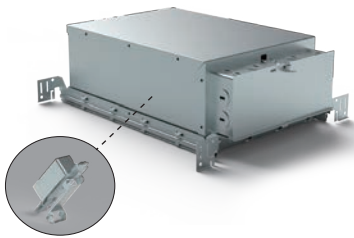


Driver is secured on patent designed bracket

ACCH-12D-80-PUP20A-1WMC 0/1-10V
 ACCH-12D-80-PUP20D-1WMC DALI
 ACCH-12D-80-PUP20T-1LMC TRIAC
 for BRAVO-2.8" round / square (20W)
 Type: IC Box



ACCI-3
 Type: Emergency battery holder
 For BillDa emergency led driver-
 Model NO. BLD-HM08D-YYY
 BLD-HM15D-YYY
 BLD-HM20D-YYY
 BLD-HM25D-YYY

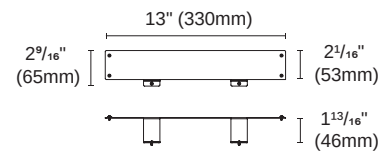

LOTUS SERIES (AM)



LOTUS (AM)

The conical-shaped design of the LOTUS fixtures and its deeper placed light source make sure that glare is reduced to a minimum . LOTUS has 4 different beam angles to choose from and can be fixed or adjustable . The small trim gives a refined touch to this elegant luminaire.

Material: Aluminum forging heatsink with anodized black finish, aluminum die casting trim with powder coating finish.

Application: Residential, shopping mall, shop, hotel room, restaurant & bar, museum,art gallery, showroom, office.

Shape
(Baffle Size)



Round
3.4"

Mountings



Recessed
Trim

Light distributions




Adjustable

LOTUS round
Adjustable




Article number	2118.523-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350

Bezel :  
 Black White




Dimmable

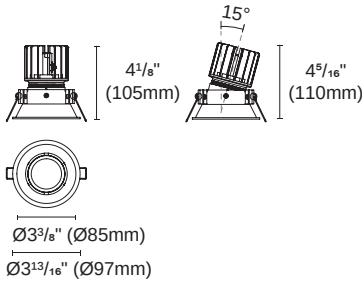


 Cut out : 3¹⁷/₃₂" (90mm)

Accessories

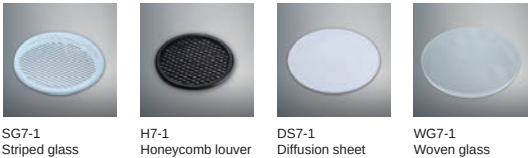


SG7-1 Striped glass H7-1 Honeycomb louver DS7-1 Diffusion sheet WG7-1 Woven glass







ACCG-28B-PUP10A-1WMC-350 0/1-10V
ACCG-28B-PUP10D-1WMC-350 DALI
ACCG-28B-PUP10T-1LMC-350 TRIAC
Type: Gear box

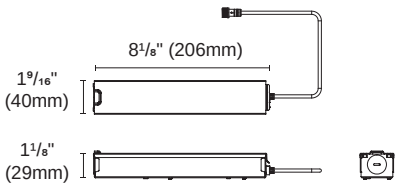

Internal space dimension:
L 4 1/4" (108mm)X W 1 3/8" (35mm)X H 1" (26mm)



ACCH-12-R90
Type: New construction plate





GAGA SERIES (AM)



GAGA (AM)

The GAGA series is a fixture designed with a removable light engine. The light engine can be assembled / disassembled by twisting the light engine. The tool-free fraction is convenient for fixed type and adjustable trim accessory are its advantage.

Accessories include honeycomb, strip glass, a diffusion sheet, clear glass. Parts can be bought separately for easy stocking purposes.

Suitable in the shopping mall, shop, hotel corridor, guest room, bathroom, etc.

Shape
(Baffle Size)



Round
1.7"

Mountings



Recessed
Trim



Recessed
Trimless

Light distributions



Fixed



Adjustable

GAGA (AM)

Light source
CRI 90
2700 or 3000 or 4000 Kelvin

Lens
For LEA-01
ACOT-76-15R
ACOT-76-24R
ACOT-76-36R
ACOT-76-50R

Baffle
ACBF-1
Colours :

Black White Gold

Round

RT-GA-1B
Fixed

RT-GA-1A
Adjustable

Accessories

SG7-1 Striped glass

WG7-1 Woven glass

DS7-1 Diffusion sheet

H7-1 Honeycomb louver



Material
Aluminum die cast

Trimless

For a minimalist design, RISE also offers a trimless design that allows the luminaire to sit flush with the ceiling.



RTL-GA-1



Baffle colour

GAGA provide available in many different colour variations to complement custom designs and colour concepts. The select housing colours (white, black) combine beautifully with white, black, or gold baffle, delivering a harmonious, high-quality overall design.

Color available - A



GAGA round
fixed / adjustable





Specification

2700 K, 3000 K, 4000 K,
CRI ≥ 90

non DIM, TRIAC, 1-10V

Types (round)



Colours

Bezel :  
Black White

Baffle :   
Black White Gold

Beam Angle



15°/24°/36°/50° (Lens)







GAGA-75-RTF2



Article number	2118.573-LEA-01
Fixture Consumption	12W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable




Cut out : 2 24/32" (70mm)



GAGA-75-RTA2



Article number	2118.574-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable



Cut out : 2 24/32" (70mm)

Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glass



GAGA-75-RTL2



Article number	2118.661-LEA-01
Fixture Consumption	12W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable




Cut out : 3 11/32" (85mm)



GAGA-75-RTLA2



Article number	2118.662-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350





Dimmable




Cut out : 3 11/32" (85mm)

Accessories


SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glass



ACCG-28B-PUP10A-1WMC-350 0/1-10V
ACCG-28B-PUP10D-1WMC-350 DALI
ACCG-28B-PUP10T-1LMC-350 TRIAC
Type: Gear box

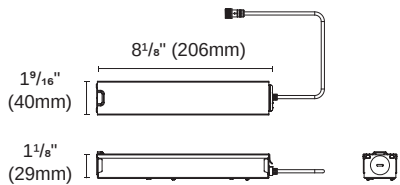


Internal space dimension:
L 4 1/4" (108mm)X W 1 3/8" (35mm)X H 1" (26mm)

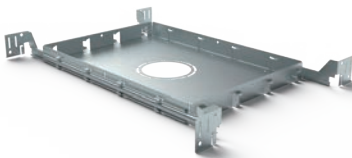

ACCH-12-R70XR85
for GAGA both trim & trimless
Type: New construction plate

Cut out:
Round : 2 24/32" (70mm)
Round : 3 11/32" (85mm)



Suitable in hotel corridor, guest room, bathroom, etc.



NANIA SERIES (AM)



NANIA (AM)

The specially designed thin trim, and low glare modules, make less existence of the fixture to the area.

Easy change module from the front for more convenience during installation.

Suitable for residential and shop applications.

Material: Aluminum forging heatsink , aluminum die casting trim.

Shape
(Baffle Size)




Round
3.5"

Mountings



Recessed Trim Recessed Trimless


Light distributions



Fixed Adjustable


NANIA (AM)



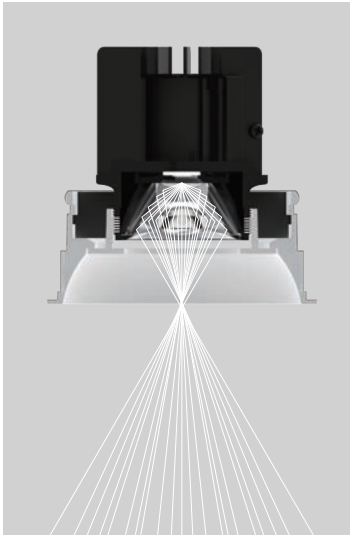

Light distribution


NANIA is highly flexible and adapts to evolving conditions in shops. The high-quality lens produces precise beam characteristics with three different beam angles. Excellent colour rendering value (CRI ≥ 90) at 2700 K, 3000 K, or 4000 K ensures outstanding product presentation. NANIA is simply mounted without tool used.

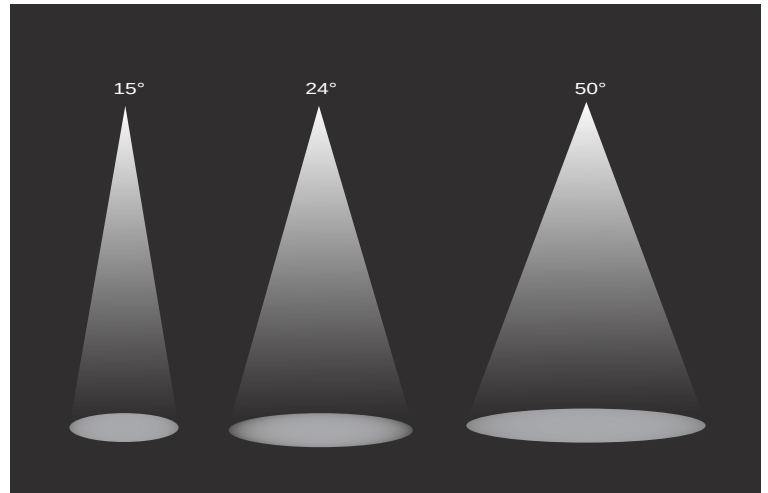

optics

equipped with special selected lens, the light is evenly spread towards the centre to achieve the beam angles needed

Trimless combinations

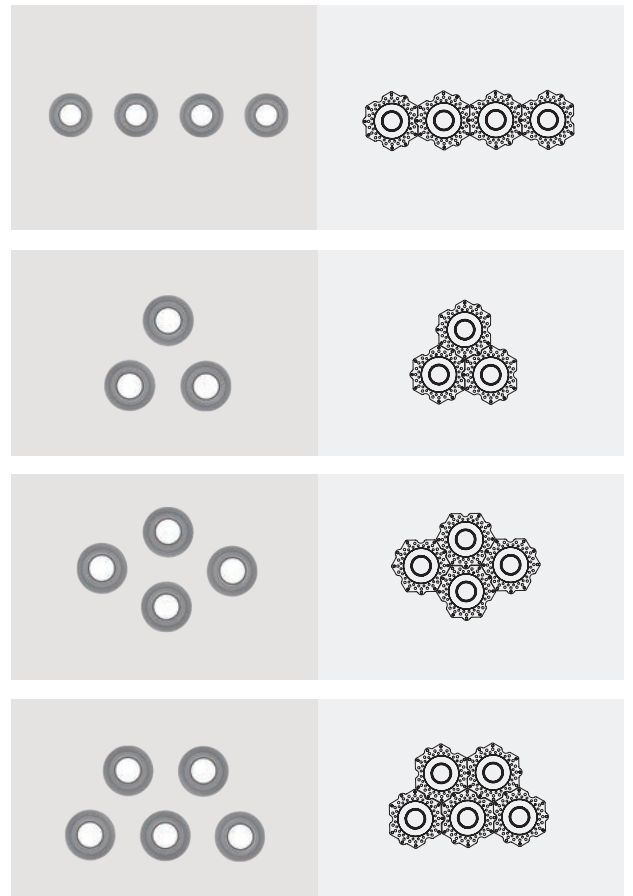


NANIA round
fixed / adjustable



Specification

2700 K, 3000 K, 4000 K,
CRI ≥ 90
TRIAC, 1-10V , DALI

Types (round)



Colours

Bezel :  Black  White

Baffle :  Black  White

Beam Angle

15°/24°/36°/50° (Lens)






NANIA-100-RTF



Article number	2118.575-LEA-01
Fixture Consumption	12W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable




⌀ Cut out : 3 21/32" (93mm)


NANIA-100-RTA



Article number	2118.576-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable

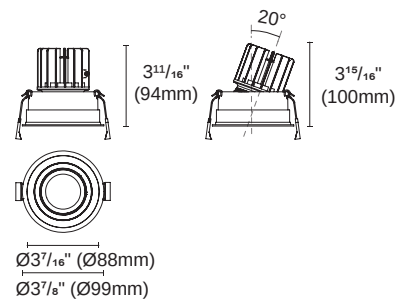

⌀ Cut out : 3 21/32" (93mm)

Accessories



SG7-1
Striped glass



H7-1
Honeycomb louvre



DS7-1
Diffusion sheet



WG7-1
Woven glass


NANIA-100-RTLF



Article number	2118.663-LEA-01
Fixture Consumption	12W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable


 Cut out : 3²¹/₃₂" (93mm)


NANIA-100-RTLA




Article number	2118.664-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable

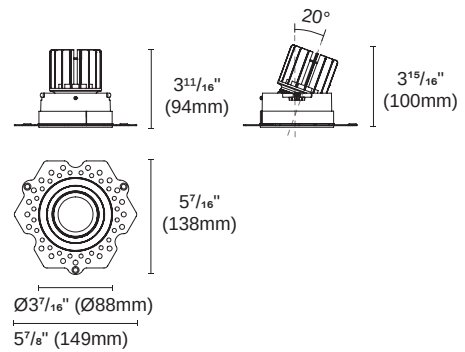

 Cut out : 3²¹/₃₂" (93mm)

Accessories


SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glass




ACCG-28B-PUP10A-1WMC-350 0/1-10V
ACCG-28B-PUP10D-1WMC-350 DALI
ACCG-28B-PUP10T-1LMC-350 TRIAC
Type: Gear box

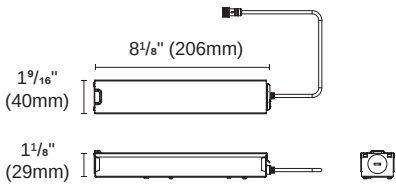

Internal space dimension:
L $4\frac{1}{4}"$ (108mm) X W $1\frac{3}{8}"$ (35mm) X H 1" (26mm)


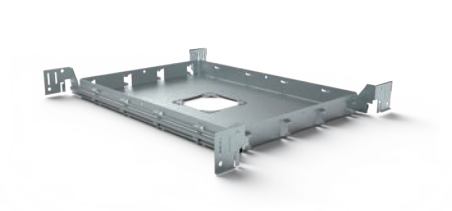


ACCH-12-R93
Type: New construction plate





ESB SERIES (AM)

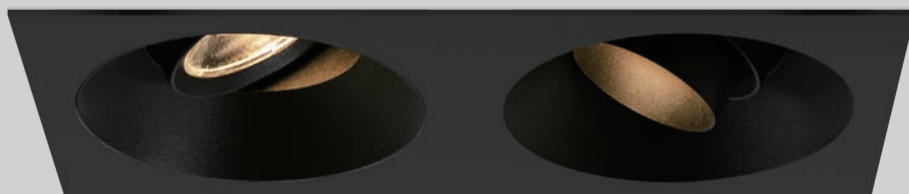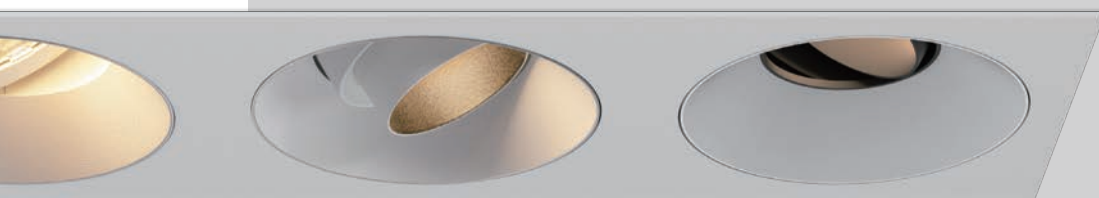

ESB (AM)

The ESB series is designed to be multi-function and with modular concept. It is highly versatile, with 8 different functions and 3 light engines to choose from, ESB series can be applied to different spaces, such as shopping mall, high-end stores, offices, restaurants & bars, exhibition centers, etc.

Materials: Aluminum forged heatsink, aluminum die-cast trim & baffle.

Shape
(Baffle Size)



1 lamp
3.5"

2 lamp
3.5"

3 lamp
3.5"

Mountings



Recessed
Trim

Recessed
Trimless

Light distributions



Fixed

Adjustable

Wallwash

ESB (AM)



Select trimless
ESB110-TLS-1
ESB110-TLS-2
ESB110-TLS-3



Select trim
ESB110-TS-1
ESB110-TS-2
ESB110-TS-3



Select light engine



LEA-15
21W Heatsink



LEA-15-DW
20W Heatsink
Dim to warm



ACOT-84-AM
30W Heatsink

Baffle (module) from series of
Stellar, Epic, Branko, Farfalla



SL110-BRA-D
Gimbal adjustable



SL110-BRA-D
+ ACSN-17
Snoot adjustable



FA90-BRF-D
Farfalla fixed



ACOT-56D
Downlight fixed



ACOT-57D
Adjustable



ACOT-60
Wallwash fixed



BK110-BRCF-D
Cone fixed



BK110-BRCA-D
Cone adjustable



BK110-BRPF-D
Pinhole fixed



BK110-BRPA-D
Pinhole adjustable



Gimbal adjustable

A multifunctional tiltable module is a highly adaptable optical adjustment fixture that can incorporate snoot accessories to isolate the light source, creating an intensely focused beam of light. It enables you to craft the dramatic aesthetics you desire while minimizing light spill and achieving clear beam edges.



Farfalla fixed

A soft, edgeless design aesthetic that seems to gently disappear into the ceiling, creating a more gentle ambiance throughout the space.



Adjustable

The adjustable module can point light wherever it is needed to achieve a range of directional illumination. Its adjustable downlight flexibility makes it ideal for task and accent lighting.



Wallwash fixed

Fixed wall wash modules can illuminate vertical surfaces to make a room look more spacious or to focus attention on objects on the wall. Unlike spot lights, wall washes can brighten larger areas and provide a soft, diffused light to a space.



Downlight fixed

As the name implies, this is a static light, directed downwards, with a choice of beam angles, super easy to install, this option provides uniform illumination and is a common option for general lighting.



Cone adjustable

Featuring a unique light-shielding effect, it can tilt within the fixture without protruding below the ceiling, blocking any line of sight to the ceiling gap from below. The swing angle can be precisely adjusted, tilting up to a maximum of 30 degrees, ensuring the light is accurately directed to your desired location.



Pinhole adjustable







It is a multifunctional accent light that can highlight a single object or architectural element. To further reduce the visual impact on the ceiling, the pin hole baffle is used to bring the luminaire flush with the ceiling for added glare protection and a 40 degree cut-off angle.













Cone fixed

It is a multifunctional accent light that can highlight a single object or architectural element. 35 degree cut-off angle.

Recessed trim

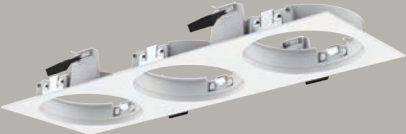ESB110-TS-1	ESB110-TS-2	ESB110-TS-3
		
  	  	  
 Cut out : 4 ¹ / ₃₂ "X4 ¹ / ₃₂ " (102X102mm)	 Cut out : 4 ¹ / ₃₂ "X8 ¹¹ / ₃₂ " (102X212mm)	 Cut out : 4 ¹ / ₃₂ "X12 ²³ / ₃₂ " (102X323mm)
Colours   Black White	Colours   Black White	Colours   Black White

Recessed trimless

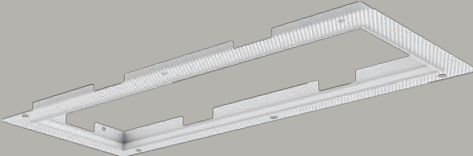ESB110-TLS-1	ESB110-TLS-2	ESB110-TLS-3
		
  	  	  
 Cut out : 4 ²³ / ₃₂ "X4 ²³ / ₃₂ " (120X120mm)	 Cut out : 4 ²³ / ₃₂ "X9 ⁴ / ₃₂ " (120X232mm)	 Cut out : 4 ²³ / ₃₂ "X13 ¹⁵ / ₃₂ " (120X342mm)
Colours  White	Colours  White	Colours  White



ESB35-1-RTFGA1



Article number
ESB35-TF1-WH-RGA0000-WH-LEA15

Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1580 (lm)
Beam Angle	20°/30°/45°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC


Article number
ESB35-TF1-WH-RGA0000-WH-LEA15DW

Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	34-1210 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC

Colours  
Black White



Dimmable

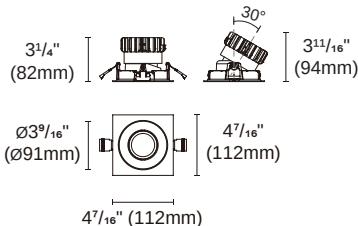

 Cut out : 4 1/32" X 4 1/32" (102X102mm)

ESB35-2-RTFGA1



Article number
ESB35-TF2-WH-RGAGA00-WH-LEA15

	NON-IC	IC
Fixture Consumption	42W	--W
Current	500 (mA)	400 (mA)
Delivered Lumen	3700 (lm)	- (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	


Article number
ESB35-TF2-WH-RGAGA00-WH-LEA15DW

Fixture Consumption	18W X2
Current	450 (mA)
Delivered Lumen	34-1210 (lm) X2
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC

Colours  
Black White



Dimmable



 Cut out : 4 1/32" X 8 11/32" (102X212mm)

ESB35-3-RTFGA1



Article number
ESB35-TF3-WH-RGAGAGA-WH-LEA15

	NON-IC	IC
Fixture Consumption	63W	--W
Current	500 (mA)	400 (mA)
Delivered Lumen	5550 (lm)	- (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	


Article number
ESB35-TF3-WH-RGAGAGA-WH-LEA15DW

Fixture Consumption	18W X3
Current	450 (mA)
Delivered Lumen	34-1210 (lm) X3
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC

Colours  
Black White



Dimmable

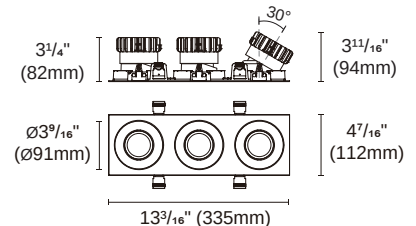

 Cut out : 4 1/32" X 12 23/32" (102X323mm)

Accessories



SG7-1
Striped glass



H7-1
Honeycomb louver



DS7-1
Diffusion sheet



WG7-1
Woven glass



ACSN-17
Snoot

ESB35-1-RTLGA1




Article number
ESB35-TL1-WH-RGA0000-WH-LEA15

Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1580 (lm)
Beam Angle	20°/30°/45°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC


Article number
ESB35-TL1-WH-RGA0000-WH-LEA15DW

Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	34-1210 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC

Colours  
Black White



Dimmable

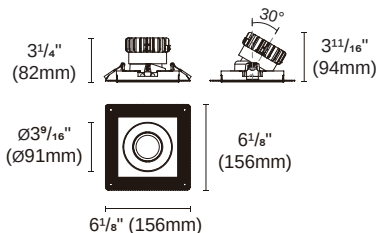

⚠ Cut out : 4²³/₃₂"X4²³/₃₂" (120X120mm)

Accessories



SG7-1
Striped glass



H7-1
Honeycomb louver



DS7-1
Diffusion sheet



WG7-1
Woven glass



ACSN-17
Snoot

ESB35-2-RTLGA1



Article number
ESB35-TL2-WH-RGAGA00-WH-LEA15

	NON-IC	IC
Fixture Consumption	42W	--W
Current	500 (mA)	400 (mA)
Delivered Lumen	3700 (lm)	- (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	


Article number
ESB35-TL2-WH-RGAGA00-WH-LEA15DW

Fixture Consumption	18W X2
Current	450 (mA)
Delivered Lumen	34-1210 (lm) X2
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC

Colours  
Black White



Dimmable

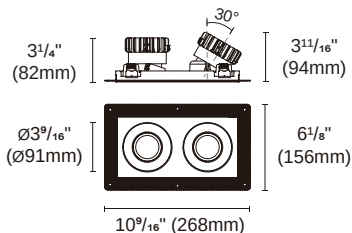

⚠ Cut out : 4²³/₃₂"X9⁹/₃₂" (120X232mm)

ESB35-3-RTLGA1




Article number
ESB35-TL3-WH-RGAGAGA-WH-LEA15

	NON-IC	IC
Fixture Consumption	63W	--W
Current	500 (mA)	400 (mA)
Delivered Lumen	5550 (lm)	- (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	


Article number
ESB35-TL3-WH-RGAGAGA-WH-LEA15DW

Fixture Consumption	18W X3
Current	450 (mA)
Delivered Lumen	34-1210 (lm) X3
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC

Colours  
Black White



Dimmable

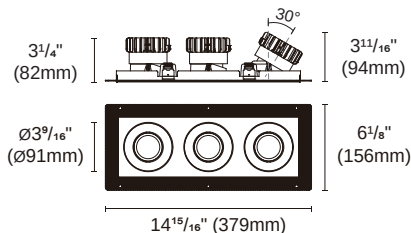

⚠ Cut out : 4²³/₃₂"X13¹⁵/₃₂" (120X342mm)

ESB35-1-RTFGA




Article number
ESB35-TF1-WH-RGA0000-WH-ACOT84AM

	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2257 (lm)	- (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	

Colours  
Black White



Dimmable

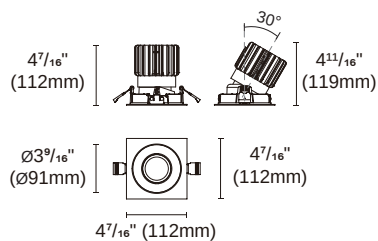

 Cut out : 4¹/₃₂"X4¹/₃₂" (102X102mm)

ESB35-2-RTFGA




Article number
ESB35-TF2-WH-RGAGA00-WH-ACOT84AM

	NON-IC
Fixture Consumption	30W X2
Current	700 (mA)
Delivered Lumen	2257 (lm) X2
Beam Angle	30°/40°/50°/60° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP40A-1WMC-850

Colours  
Black White



Dimmable



 Cut out : 4¹/₃₂"X8¹¹/₃₂" (102X212mm)

ESB35-3-RTFGA




Article number
ESB35-TF3-WH-RGAGAGA-WH-ACOT84AM

	NON-IC
Fixture Consumption	30W X3
Current	700 (mA)
Delivered Lumen	2257 (lm) X3
Beam Angle	30°/40°/50°/60° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP40A-1WMC-850

Colours  
Black White



Dimmable

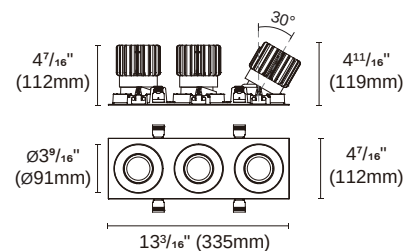

 Cut out : 4¹/₃₂"X12²³/₃₂" (102X323mm)

Accessories



SG7-1
Striped glass



H7-1
Honeycomb louver



DS7-1
Diffusion sheet



WG7-1
Woven glass



ACSN-17
Snoot

ESB35-1-RTLGA



Article number
ESB35-TL1-WH-RGA0000-ACOT84AM


	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2257 (lm)	- (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	

Colours  
Black White



*IC box only for 1T

Dimmable

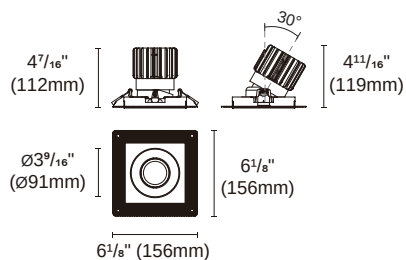

 Cut out : 4²³/₃₂"X4²³/₃₂" (120X120mm)

ESB35-2-RTLGA




Article number
ESB35-TL2-WH-RGAGA00-WH-ACOT84AM

	NON-IC
Fixture Consumption	30W X2
Current	700 (mA)
Delivered Lumen	2257 (lm) X2
Beam Angle	30°/40°/50°/60° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP40A-1WMC-850

Colours  
Black White



Dimmable

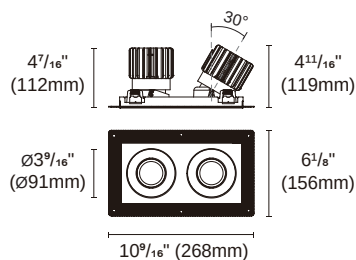

 Cut out : 4²³/₃₂"X9⁴/₃₂" (120X232mm)

ESB35-3-RTLGA




Article number
ESB35-TL3-WH-RGAGAGA-WH-ACOT84AM

	NON-IC
Fixture Consumption	30W X3
Current	700 (mA)
Delivered Lumen	2257 (lm) X3
Beam Angle	30°/40°/50°/60° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP40A-1WMC-850

Colours  
Black White



Dimmable

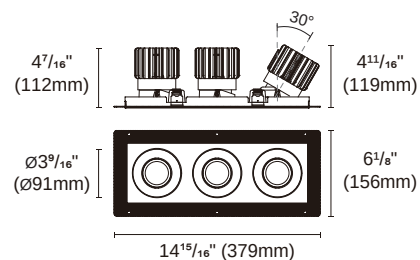

 Cut out : 4²³/₃₂"X13¹⁵/₃₂" (120X342mm)

Accessories



SG7-1
Striped glass



H7-1
Honeycomb louver



DS7-1
Diffusion sheet



WG7-1
Woven glass



ACSN-17
Snoot



ORDERING INFORMATION

SELECT MOUNTING OF LIGHT

Trim or Trimless.



TF1



TF2



TF3



TL1



TL2



TL3

SELECT MODULE

8 modules from EPIC, STELLAR, BRANKO, FARFALLA.



GA

Gimbal adjustable



DF

Downlight fixed



CF

Cone fixed



PF

Pinhole fixed



FF

Farfalla fixed



AA

Adjustable



CA

Cone adjustable



PA

Pinhole adjustable



WF

Wallwash fixed

SELECT LIGHT ENGINE

*IC box only for 1T



ACOT84AM

30W / 700mA / NON-IC
25W / 600mA / IC



LEA15

17W / 500mA / NON-IC
17W / 500mA / IC



LEA15DW

Dim to warm
16W / 450mA / NON-IC
16W / 450mA / IC

MOUNTING		#OF LIGHT		COLOURS		BAFFLE SHAPE		MODULE 1		MODULE 2		MODULE 3	
TF	Trim	1	1-Light	WH	White	R	Round	GA	Gimbal	GA	Gimbal	GA	Gimbal
TL	Trimless	2	2-Light	BK	Black			DF	Downlight fixed	DF	Downlight fixed	DF	Downlight fixed
		3	3-Light					AA	Adjustable	AA	Adjustable	AA	Adjustable
								WF	Wallwash	WF	Wallwash	WF	Wallwash
								CF	Cone fixed	CF	Cone fixed	CF	Cone fixed
								CA	Cone adjustable	CA	Cone adjustable	CA	Cone adjustable
								PF	Pinhole fixed	PF	Pinhole fixed	PF	Pinhole fixed
								PA	Pinhole adjustable	PA	Pinhole adjustable	PA	Pinhole adjustable
								FF	Farfalla fixed	FF	Farfalla fixed	FF	Farfalla fixed
								00	None			00	None

LIGHT ENGINE		CCT		CRI		BEAM ANGLE		ACCESSORIES	
LEA15	LEA-15	27	2700K	80	80+	T	13°-20°	SG7-1	Striped glass
ACOT84AM	ACOT-84-AM	30	3000K	90	90+	S	21°-30°	H7-1	Honeycomb louver
		35	3500K			M	31°-40°	DS7-1	Diffusion sheet
		40	4000K			L	46°-60°	WG7-1	Woven glass
						W	Wallwash	ACSN-17	Snoot (for GA module)
LEA15DW	LEA-15-DW	DW	Dim to warm	90	90+				

*IC box only for 1-Light

ESB35	-	TL	3	-	WH	-	R	DF	PF	DF	-	WH	-	LEA15
SERIES		MOUNTING	#OF LIGHT		COLOURS		BAFFLE SHAPE	MODULE 1	MODULE 2	MODULE 3		BAFFLE COLOURS		LIGHT ENGINE
							-	30	90	-	S			
								CCT	CRI		Beam Angle			

ORDERING EXAMPLE 1 :

ESB35 / Trim / 1-Light / White /

Gimbal / White Baffle /

30 Watt / 3000K / 40° Beam Angle

CODE : ESB35-TF1-WH-RGA0000-WH-ACOT84AM-3090-M

ORDERING EXAMPLE 2 :

ESB35 / Trimless / 2-Light / White /

Gimbal And Gimbal / White Baffle /

16 Watt / Dim To Warm / 30° Beam Angle

CODE : ESB35-TL2-WH-RGAGA00-WH-LEA15DW-TW00-S

ORDERING EXAMPLE 3 :

ESB35 / Trim / 3-Light / Black /

Adjustable And Downlight Fixed And Adjustable /


Black Baffle / 17 Watt / 3000K / 50° Beam Angle

CODE : ESB35-TL2-BK-RAADFAA-BK-LEA15-3090-L

INSTALLATION OPTIONS




ACCG-22B-PUP20A-1WMC 0/1-10V
 ACCG-22B-PUP20D-1WMC DALI
 ACCG-22B-PUP20T-1LMC TRIAC
 for light engine LEA-15 (21W)
 LEA-15-DW (18W)
 Type: Gear box

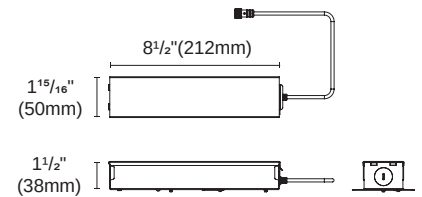

Internal space dimension:
 L 8 1/4" (209mm) X W 1 7/8" (48mm) X H 1 5/16" (33mm)



ACCG-16B-PUP40A-1WMC-850 0/1-10V
 ACCG-16B-PUP40D-1WMC-850 DALI
 ACCG-16B-PUP40T-1LMC-850 TRIAC
 for light engine ACOT-84-AM (30W)
 Type: Gear box

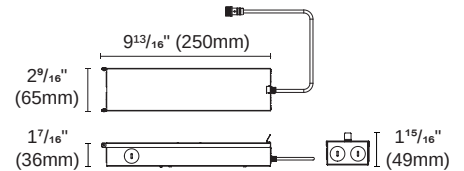


Internal space dimension:
 L 9 13/16" (250mm) X W 2 1/2" (64mm) X H 1 5/16" (34mm)

* For single fixture connection only, not available for parallel multiple connection




ACCG-35B-PUP20A-1WMC 0/1-10V
 ACCG-35B-PUP20D-1WMC DALI
 ACCG-35B-PUP20T-1LMC TRIAC
 for EPIC85-2.8"
 EPIC110-3.5" (18-21W)
 Type: Gear box

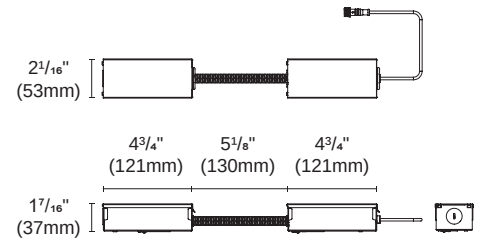


* Use with low ceilings




ACCG-32B-PUP20A-1WMC 0/1-10V
 ACCG-32B-PUP20D-1WMC DALI
 ACCG-32B-PUP20T-1LMC TRIAC
 for light engine LEA-15 (21W)
 LEA-15-DW (18W)
 ACCG-32B-PUP40A-1WMC-850 0/1-10V
 ACCG-32B-PUP40D-1WMC-850 DALI
 ACCG-32B-PUP40T-1LMC-850 TRIAC
 for light engine ACOT-84-AM (30W)
 Type: Gear box

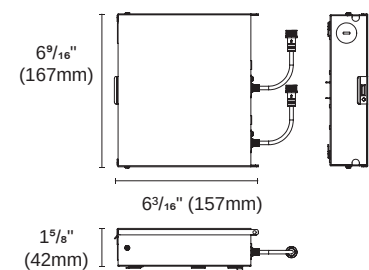

ACCG-33B-PUP20A-1WMC 0/1-10V
 ACCG-33B-PUP20D-1WMC DALI
 ACCG-33B-PUP20T-1LMC TRIAC
 for light engine LEA-15 (21W)
 LEA-15-DW (18W)
 ACCG-33B-PUP40A-1WMC-850 0/1-10V
 ACCG-33B-PUP40D-1WMC-850 DALI
 ACCG-33B-PUP40T-1LMC-850 TRIAC
 for light engine ACOT-84-AM (30W)
 Type: Gear box

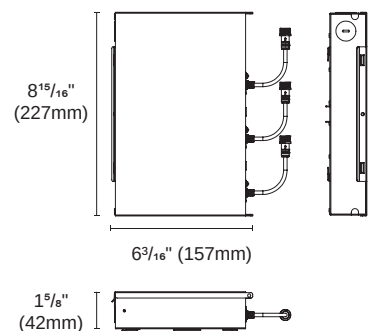





ACCH-12H-S102-S128 for 1-Light
Type: New construction plate

Cut out:

Trim : $4\frac{1}{32}$ " X $4\frac{1}{32}$ " (102X102mm)

Trimless : $4\frac{23}{32}$ " X $4\frac{23}{32}$ " (120X120mm)

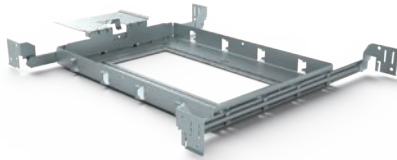



ACCH-12J-102X212 for 2-Light
Type: New construction plate

Cut out:

Trim : $4\frac{1}{32}$ " X $8\frac{11}{32}$ " (102x212mm)

Trimless : $4\frac{23}{32}$ " X $9\frac{1}{8}$ " (120x232mm)

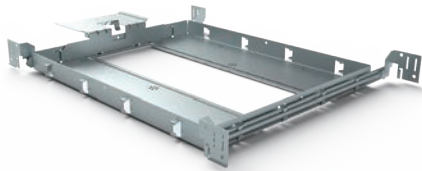


ACCH-7F-102X323 for 3-Light
Type: New construction plate

Cut out:

Trim : $4\frac{1}{32}$ " X $8\frac{11}{32}$ " (102X323mm)

Trimless : $4\frac{23}{32}$ " X $13\frac{15}{32}$ " (120X342mm)



INSTALLATION OPTIONS




ACCH-12B-S102-S128-PUP20A-1WMC 0/1-10V
 ACCH-12B-S102-S128-PUP20D-1WMC DALI
 ACCH-12B-S102-S128-PUP20T-1LMC TRIAC
 for light engine LEA-15 (21W)
 LEA-15-DW (18W)

Type: IC Box for 1-Light

Cut out:

Trim : $4\frac{1}{32}$ " X $4\frac{1}{32}$ " (102X102mm)

Trimless : $4\frac{23}{32}$ " X $4\frac{23}{32}$ " (120X120mm)




ACCH-7B-S102-S128-PUP40A-1WMC-850 0/1-10V
 ACCH-7B-S102-S128-PUP40D-1WMC-850 DALI
 ACCH-7B-S102-S128-PUP40T-1LMC-850 TRIAC
 for light engine ACOT-84-AM (30W)

Type: IC Box for 1-Light

Cut out:

Trim : $4\frac{1}{32}$ " X $4\frac{1}{32}$ " (102X102mm)

Trimless : $4\frac{23}{32}$ " X $4\frac{23}{32}$ " (120X120mm)

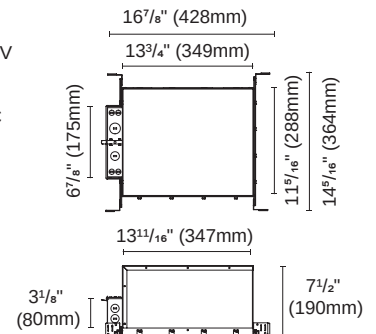


ACCH-7G-102X212-PUP20A-1WMC 0/1-10V
 ACCH-7G-102X212-PUP20D-1WMC DALI
 ACCH-7G-102X212-PUP20T-1LMC TRIAC
 for light engine LEA-15 (21W)

Type: IC Box for 2-Light

Cut out:

Trim : $4\frac{1}{32}$ " X $8\frac{11}{32}$ " (102X212mm)

Trimless : $4\frac{23}{32}$ " X $9\frac{4}{32}$ " (120X232mm)

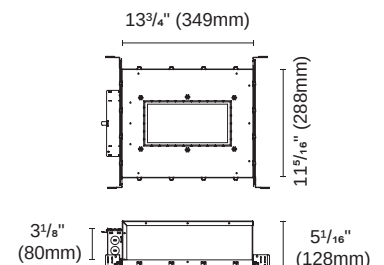


ACCH-15C-101X323-PUP20A-1WMC 0/1-10V
 ACCH-15C-101X323-PUP20D-1WMC DALI
 ACCH-15C-101X323-PUP20T-1LMC TRIAC
 for light engine LEA-15 (21W)

Type: IC Box for 3-Light

Cut out:

Trim : $4\frac{1}{32}$ " X $12\frac{23}{32}$ " (102X323mm)

Trimless : $4\frac{23}{32}$ " X $13\frac{15}{32}$ " (120X342mm)

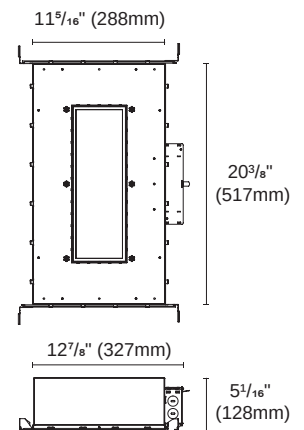



ACCI-3

Type: Emergency battery holder


For BillDa emergency led driver-

Model NO. BLD-HM08D-YYY

BLD-HM15D-YYY

BLD-HM20D-YYY

BLD-HM25D-YYY

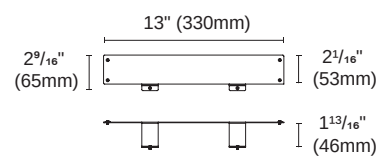

SHELL-S SERIES (AM)




SHELL-S_(AM)

With the ingenious mechanics, optimized thermal management, and multiple free-form surface reflectors, SHELL brings a new picture to display lighting solutions. The wall wash system creates a glowing transition between wall and ceiling, and avoids stripes and shadows across the wall, offering a harmonious visual experience.

Shape



7T



14T



21T

Linear

Mountings



Recessed
Trim

Light distributions



Wallwash

SHELL-S 7T/14T/21T recessed downlights
fixed Wallwash



Specification

2700 K, 3000 K, 4000 K,

CRI ≥ 90

SHELL-S 7T to 390 lm

(3000 K) 14T to 760 lm

21T to 1091 lm

1-10V

Types

Recessed

Trim

A 7T

B 14T

C 21T

Colours

Bezel : ☒ Black ☐ White

Beam Angle



Wallwash (Reflector)







SHELL-S

Wallwash

Thanks to asymmetric light distribution and high-performance optical elements, SHELL achieves to ensure the display effect is highlighted can produce a smooth wall gradient from top to bottom. The reflector integrates precise light control, high efficiency low glare and a comfortable visual experience can be precisely created.

X lamp to wall
Y lamp to lamp
Z lamp to floor

$X : Y : Z = 1 : 1 : 2$ (M)

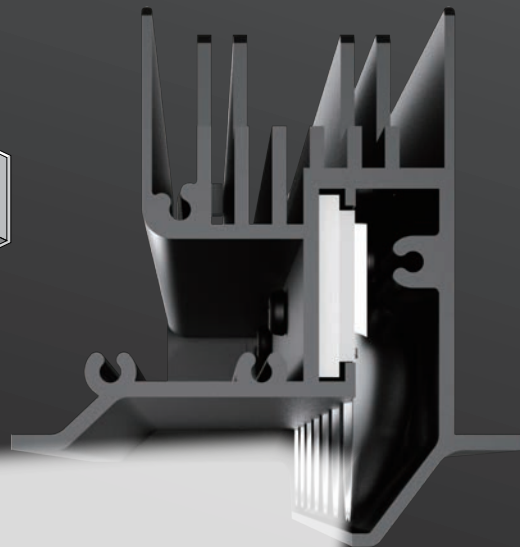



The wall is an excellent carrier of light display, washing the wall with light is one of the most common facade lighting techniques in lighting design: the target wall is evenly "washed" to achieve an overall brightening effect, suitable for hotel lobby, public facilities, presenting the texture of the wall itself.


SHELL-S-7-TW




Article number	2114.418A-AM
Fixture Consumption	9W
Voltage	120-277 V
Delivered Lumen	390 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS12W-48-C0180-RD



Dimmable



Cut out : 1 18/32"X5 31/32" (40X152mm)

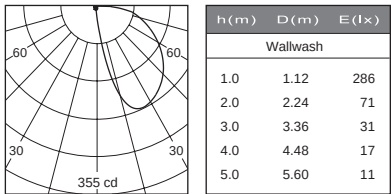


SHELL-S-14-TW




Article number	2114.418B-AM
Fixture Consumption	17W
Voltage	120-277 V
Delivered Lumen	760 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC



Dimmable



Cut out : 1 18/32"X11 16/32" (40X292mm)

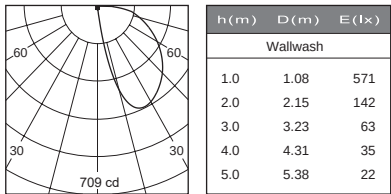


SHELL-S-21-TW




Article number	2114.418C-AM
Fixture Consumption	24W
Voltage	120-277 V
Delivered Lumen	1091 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+
Driver Model	PSB50W-0850-56




Dimmable

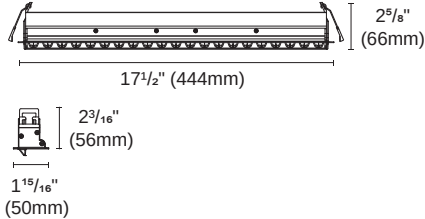


Cut out : 1 18/32"X17" (40X432mm)

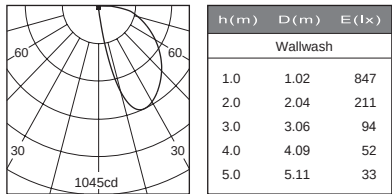




ACCG-20A-LBS12W-48-C0180-RD non dim
For (SHELL-S-7T)
Type: Gear box

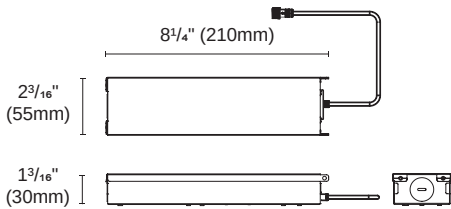

Internal space dimension:
L 7 7/8" (200mm)X W 2 1/16" (53mm)X H 1 1/16" (27mm)





ACCG-22A-PUP20A-1WMC 0/1-10V
For (SHELL-S-14T)
ACCG-22A-PSB50W-0850-56 0/1-10V, TRIAC
For (SHELL-S-21T)
Type: Gear box

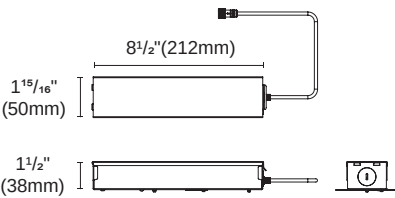


Internal space dimension:
L 8 1/4" (209mm)X W 1 7/8" (48mm)X H 1 5/16" (33mm)



ACCG-25-40X148 For (SHELL-S-7T)
Type: New construction plate

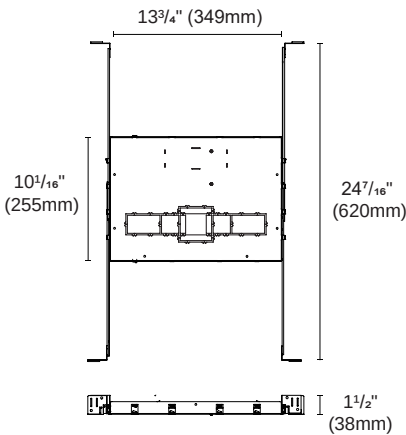


ACCH-1-40X428 For (SHELL-S-14T)
(SHELL-S-21T)
Type: New construction plate

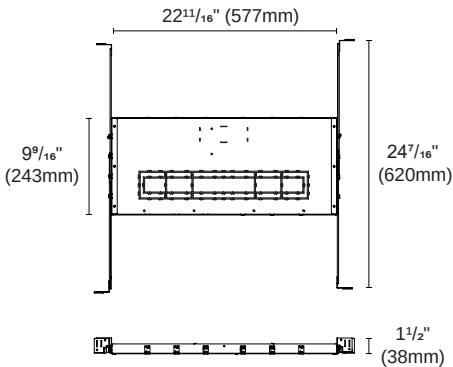



SHELL SERIES (AM)

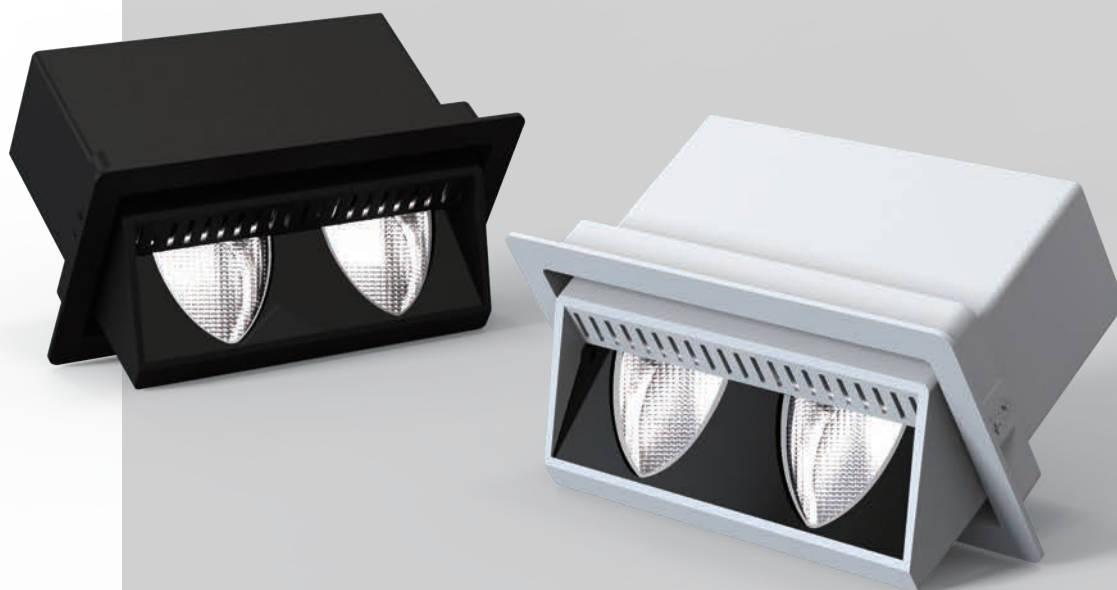

SHELL (AM)

With the ingenious mechanics, optimized thermal management, and multiple free-form surface reflectors, SHELL brings a new picture to display lighting solutions. The wall wash system creates a glowing transition between wall and ceiling, and avoids stripes and shadows across the wall, offering a harmonious visual experience.

Shape



Single-sided
2T

Mountings



Recessed
Trim

Light distributions



Wallwash



Floor




The SHELL light is available in three variants with different beam characteristics to suit different space layouts and requirements. Perfect alignment ensures that as much light as possible is directed at the product with the minimum of luminaires. SHELL lights can be adapted to a variety of conditions and illuminated selectively without loss of light dispersion. As a result, all products are presented in an attractive manner, regardless of the size of the shop or the interior design.





Shelf floor wallwash

Suggested height to ceiling:300cm
Distance between fixtures:150cm
Distance from wall:100cm




X lamp to wall
Y lamp to lamp
Z lamp to floor

X:Y:Z= 1 : 1.5 : 2 m (Low)

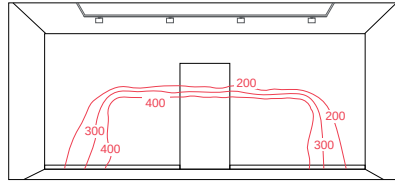




High ceiling wallwash

Suggested height to ceiling:500cm
Distance between fixtures:1.20cm
Distance from wall:100cm




X lamp to wall
Y lamp to lamp
Z lamp to floor

X:Y:Z= 1 : 1.2 : 5 m

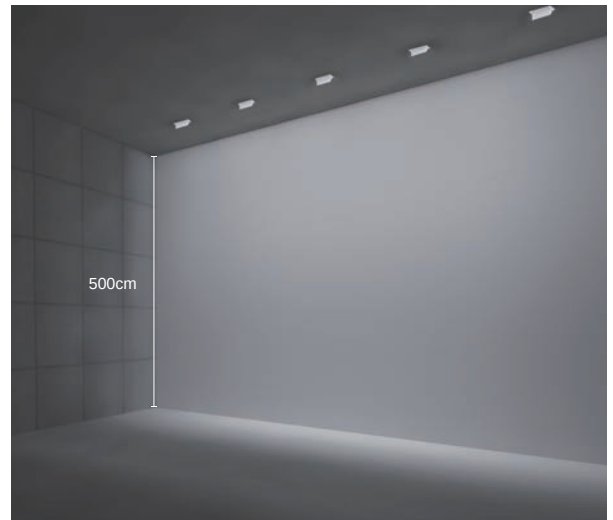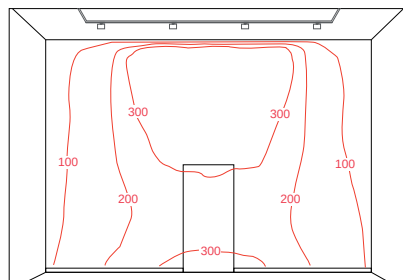



Wide wallwash

Suggested height to ceiling:300cm
Distance between fixtures:200cm
Distance from wall:100cm



X lamp to wall
Y lamp to lamp
Z lamp to floor


X:Y:Z= 1 : 2 : 3 m

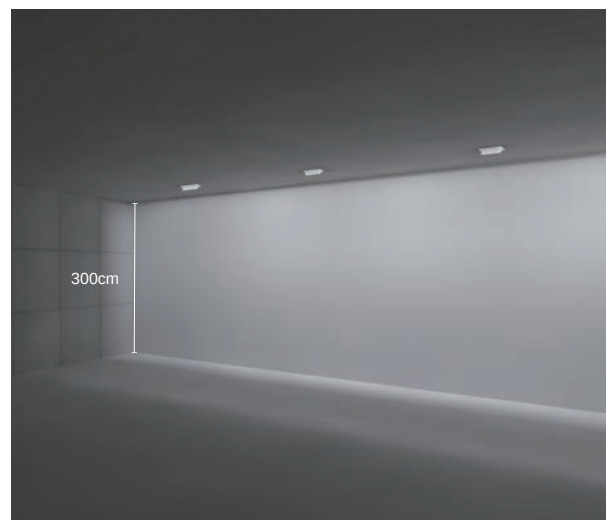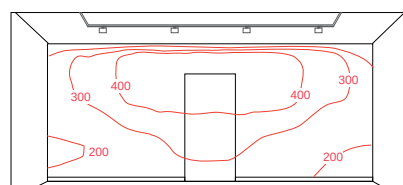





SHELL-D recessed downlights
wallwash

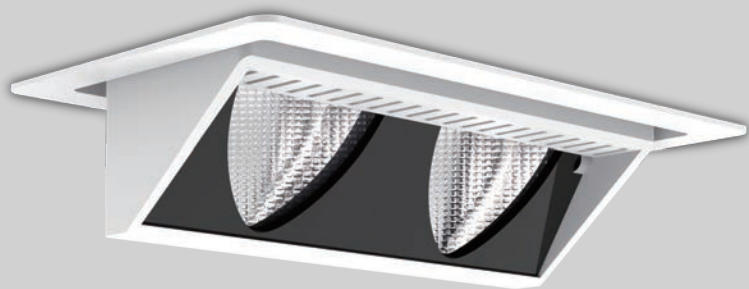

Specification

2700 K, 3000 K, 4000 K,


CRI $\geq$ 90

SHELL-D 38W to 2509 lm

(3000 K) 38W to 2779 lm

38W to 2570 lm

Types



Colours

Colours :  
Black White

Beam Angle





SHELL-D-SF2





Article number	2114.429-AM
Fixture Consumption	38W
Current	900 (mA)
Delivered lumen	2509 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+
Driver	PUP40A-1WMC-1200

Shelf floor wallwash



Dimmable

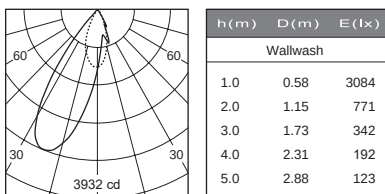
 Cut out : 3²/₃₂"X6²⁸/₃₂" (78X175mm)


SHELL-D-HC2





Article number	2114.429A-AM
Fixture Consumption	38W
Current	900 (mA)
Delivered lumen	2779 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+
Driver	PUP40A-1WMC-1200

High ceiling wallwash



Dimmable

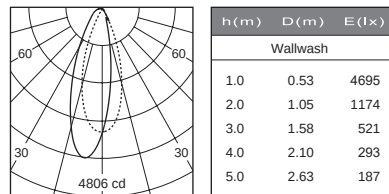
 Cut out : 3²/₃₂"X6²⁸/₃₂" (78X175mm)


SHELL-D-W2





Article number	2114.429B-AM
Fixture Consumption	38W
Current	900 (mA)
Delivered lumen	2570 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+
Driver	PUP40A-1WMC-1200

Wide wallwash



Dimmable

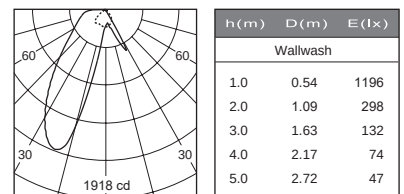

 Cut out : 3²/₃₂"X6²⁸/₃₂" (78X175mm)







* For single fixture connection only, not availalbe for parallel multiple connection


ACCG-16B-PUP40A-1WMC-1200 0/1-10V
ACCG-16B-PUP40D-1WMC-1200 DALI
ACCG-16B-PUP40T-1LMC-1200 TRIAC
Type: Gear box

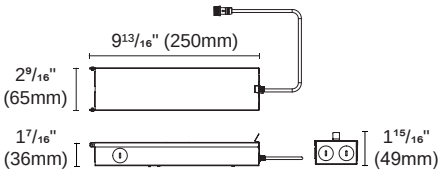


Internal space dimension:
L 9 13/16" (250mm)X W 2 1/2" (64mm)X H 1 5/16" (34mm)



ACCH-12H-78X174
Type: New construction plate



ACCH-7B-78X174
Type: IC Box

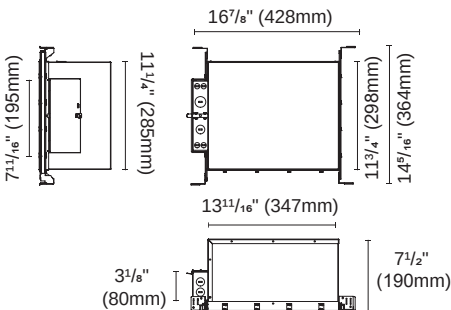



KANO SERIES (AM)



KANO (AM)

KANO is designed to improve the concept of downlight with high power LED and low glare baffle design. Therefore, it provides comfort, circular and anti glare distribution. Overall appearance shows neat and elegant for interior area. In other words, KANO is able to use as primary or decorative illumination for widely applications; such as office, restaurant, hotel, highend store, residential housing and so on.

Shape



1T

2T

4T

5T

10T

15T

Mountings



Recessed
Trim

Recessed
Trimless

Light distributions



Fixed

Adjustable

Wallwash

KANO recessed downlights
fixed / adjustable / wallwash




Specification

2700 K, 3000 K, 4000 K,
CRI ≥ 90
IP20

Types



fixed		1T/2T/4T/5T/10T/15T
adjustable		5T/10T/15T
wallwash		5T/10T/15T

Colours

Bezel :  Black  White

Baffle :  Black

Custom baffle colour
 White  Gold  Chrome  Rosegold
(MOQ is required for custom colours)

Beam Angle

  
15°/30°/40° (Reflector)


Wallwash




Light engine installation









KANO-II-1-TF

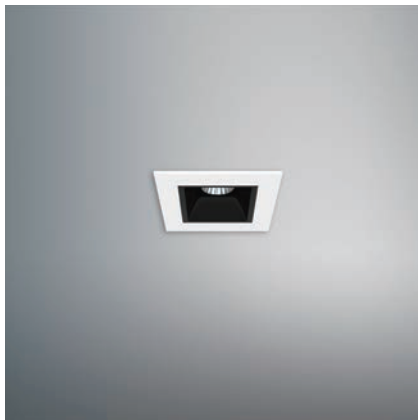

Article number	1814.400-1-AM
Fixture Consumption	4.5W
Voltage	120-277 V
Delivered Lumen	171 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LSC4W700PUNI




Cut out : 1¹⁸/₃₂"X1¹⁸/₃₂" (40X40mm)

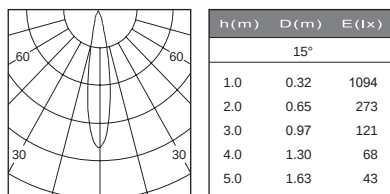


KANO-II-2-TF




Article number	1814.400-2-AM
Fixture Consumption	7W
Voltage	120-277 V
Delivered Lumen	326 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LSC4W700PUNI



Cut out : 1¹⁷/₃₂"X2¹⁸/₃₂" (39X65mm)

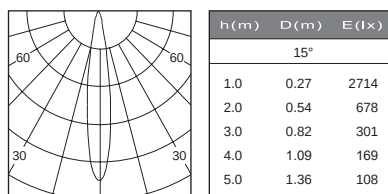

KANO-II-4-TF

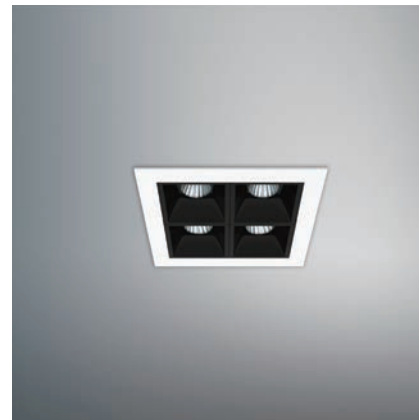


Article number	1814.413-4-AM
Fixture Consumption	11W
Voltage	120-277 V
Delivered Lumen	656 (lm)
Beam Angle	15°/30°/45° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS12W-16-C0700-RD




Dimmable

0-10V



Cut out : 2²⁰/₃₂"X2²³/₃₂" (67X69mm)

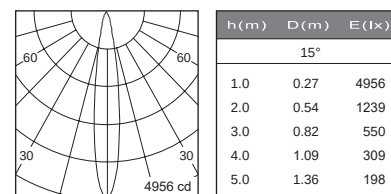

1TF, 2TF & 4TF are not modulate models

KANO-III-5-TF





Article number	2114.412-5-AM
Fixture Consumption	12W
Voltage	120-277 V
Delivered Lumen	679 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS12W-16-C0600-RD



Dimmable

0-10V

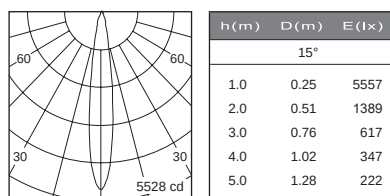
 Cut out : 1¹⁷/₃₂"X5¹⁴/₃₂" (39X138mm)


KANO-III-10-TF





Article number	2114.412-10-AM
Fixture Consumption	21W
Voltage	120-277 V
Delivered Lumen	1370 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS30W-42-C0600-RD



Dimmable

0-10V

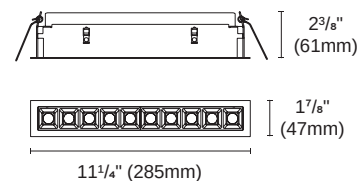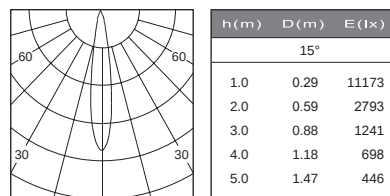
 Cut out : 1²⁰/₃₂"X10²³/₃₂" (41X272mm)


KANO-III-15-TF





Article number	2114.412-15-AM
Fixture Consumption	28W
Voltage	120-277 V
Delivered Lumen	1969 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS30W-48-C0550-RD



Dimmable

0-10V

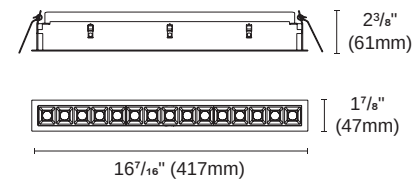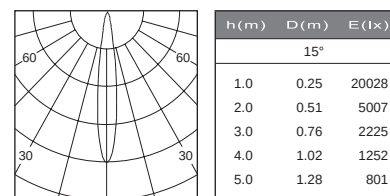
 Cut out : 1²⁰/₃₂"X15²⁹/₃₂" (41X404mm)


KANO-II-1-TLF



Article number	1814.402-1-AM
Fixture Consumption	4.5W
Voltage	120-277 V
Delivered Lumen	171 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LSC4W700PUNI



KANO-II-2-TLF



Article number	1814.402-2-AM
Fixture Consumption	7W
Voltage	120-277 V
Delivered Lumen	326 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LSC4W700PUNI



KANO-II-4-TLF




Article number	1814.402-4-AM
Fixture Consumption	11W
Voltage	120-277 V
Delivered Lumen	656 (lm)
Beam Angle	15°/30°/45° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS12W-16-C0700-RD




Dimmable

0-10V





Locking Type : Push

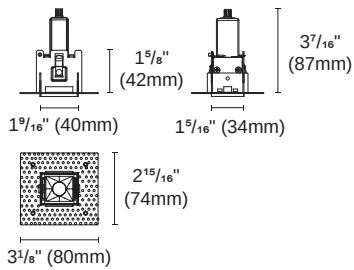
 Cut out : 1²⁵/₃₂"X1³¹/₃₂" (45X50mm)

Locking Type : Push

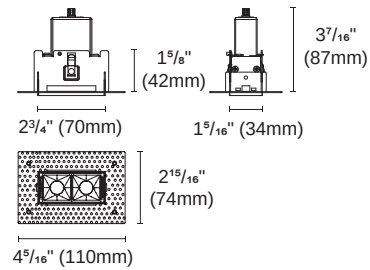
 Cut out : 1²⁵/₃₂"X3⁵/₃₂" (45X80mm)

Locking Type : Push

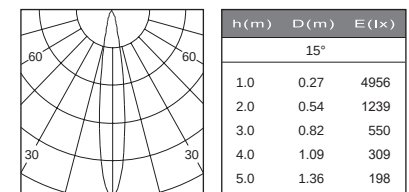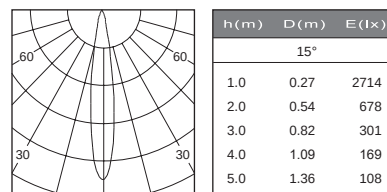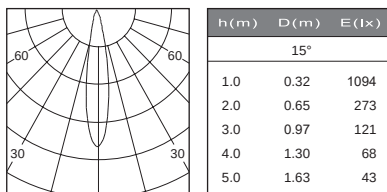
 Cut out : 2³⁰/₃₂"X3⁵/₃₂" (75X80mm)


KANO-III-5-TLF





Article number	2114.409-5-AM
Fixture Consumption	12W
Voltage	120-277 V
Delivered Lumen	679 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS12W-16-C0600-RD



Dimmable

0-10V

Locking Type : Push

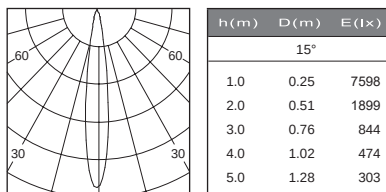
 Cut out : 1²⁶/₃₂"X6¹/₃₂" (46X153mm)


KANO-III-10-TLF





Article number	2114.409-10-AM
Fixture Consumption	21W
Voltage	120-277 V
Delivered Lumen	1370 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS30W-42-C0600-RD



Dimmable

0-10V

Locking Type : Push

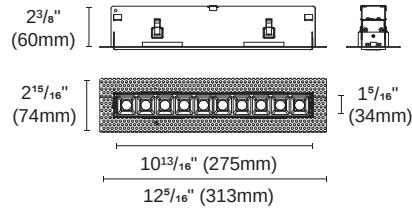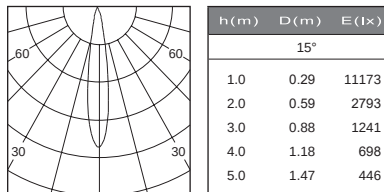
 Cut out : 1²⁶/₃₂"X11⁹/₃₂" (46X286mm)


KANO-III-15-TLF





Article number	2114.409-15-AM
Fixture Consumption	28W
Voltage	120-277 V
Delivered Lumen	1969 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS30W-48-C0550-RD



Dimmable

0-10V

Locking Type : Push

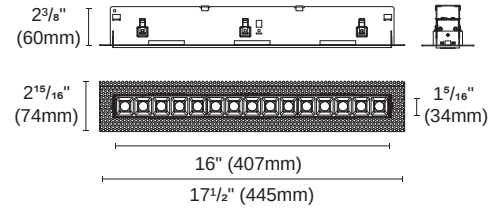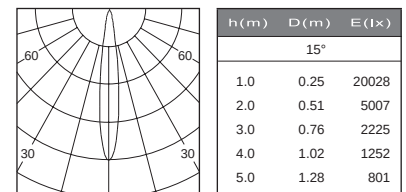
 Cut out : 1²⁶/₃₂"X16¹⁵/₃₂" (46X418mm)


KANO-II-5-TA





Article number	1814.401-5-AM
Fixture Consumption	12W
Voltage	120-277 V
Delivered Lumen	679 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS12W-16-C0600-RD



Dimmable

0-10V

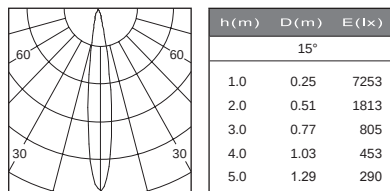
 Cut out : 2²⁴/₃₂"X6¹⁹/₃₂" (70X160mm)


KANO-II-10-TA





Article number	1814.401-10-AM
Fixture Consumption	21W
Voltage	120-277 V
Delivered Lumen	1370 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS30W-42-C0600-RD



Dimmable

0-10V

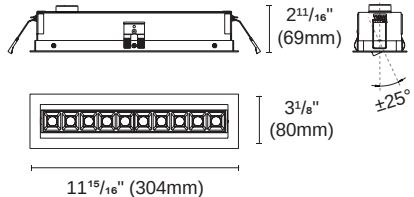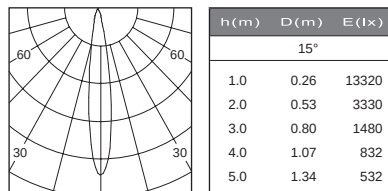
 Cut out : 2²⁴/₃₂"X11¹⁷/₃₂" (70X293mm)


KANO-II-15-TA





Article number	1814.401-15-AM
Fixture Consumption	28W
Voltage	120-277 V
Delivered Lumen	1969 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS30W-48-C0550-RD



Dimmable

0-10V

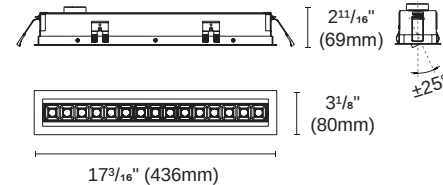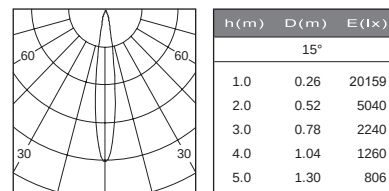
 Cut out : 2²⁴/₃₂"X16²³/₃₂" (70X425mm)


5TA, 10TA & 15TA are not modulate models

KANO-II-5-TLA





Article number	1914.429-5-AM
Fixture Consumption	12W
Voltage	120-277 V
Delivered Lumen	679 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS12W-16-C0600-RD



Dimmable


0-10V

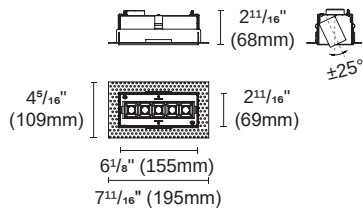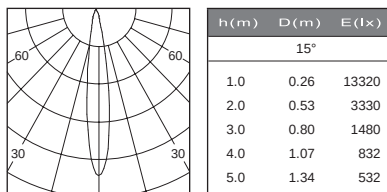
 Cut out : 3²/₃₂"X6²⁹/₃₂" (78X168mm)


KANO-II-10-TLA





Article number	1914.429-10-AM
Fixture Consumption	21W
Voltage	120-277 V
Delivered Lumen	1370 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS30W-42-C0600-RD



Dimmable

0-10V

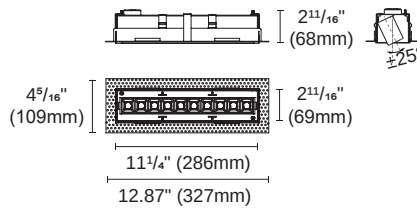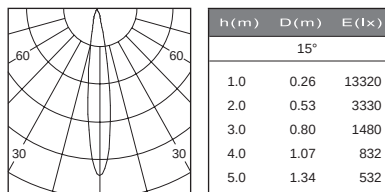
 Cut out : 3²/₃₂"X11²⁶/₃₂" (78X300mm)


KANO-II-15-TLA





Article number	1914.429-15-AM
Fixture Consumption	28W
Voltage	120-277 V
Delivered Lumen	1969 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS30W-48-C0550-RD



Dimmable


0-10V

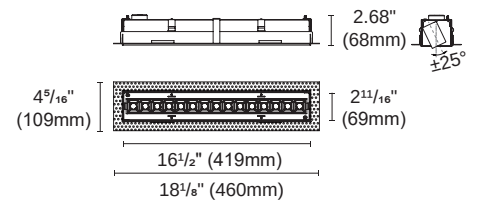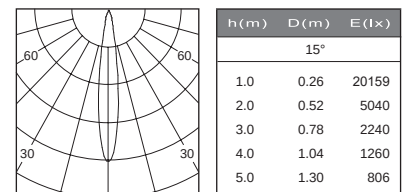
 Cut out : 3²/₃₂"X17²/₃₂" (78X433mm)


KANO-III-5-TW




Article number	2114.413-5-AM
Fixture Consumption	12W
Voltage	120-277 V
Delivered Lumen	431 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS12W-16-C0600-RD




Dimmable

0-10V




Cut out : 1 17/32"X5 15/32" (39X138mm)

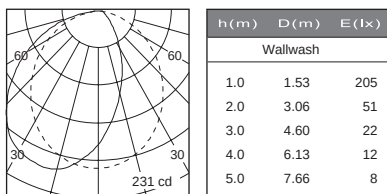

KANO-III-10-TW




Article number	2114.413-10-AM
Fixture Consumption	21W
Voltage	120-277 V
Delivered Lumen	834 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS30W-42-C0600-RD




Dimmable

0-10V

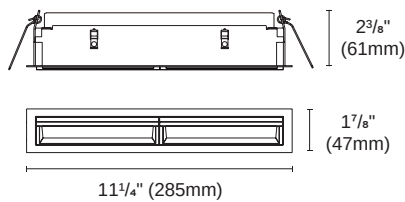


Cut out : 1 20/32"X10 23/32" (41X272mm)

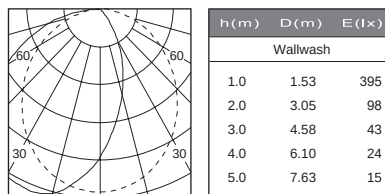

KANO-III-15-TW




Article number	2114.413-15-AM
Fixture Consumption	28W
Voltage	120-277 V
Delivered Lumen	1217 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+
Driver Model	PSB50W-0850-56




Dimmable

0-10V

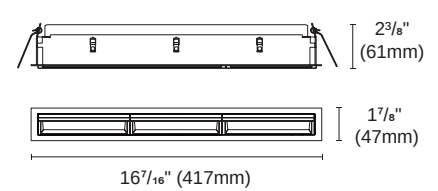

Cut out : 1 20/32"X15 29/32" (41X404mm)

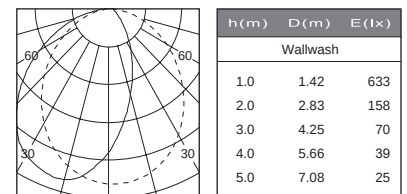


KANO-II-5-TLW




Article number	2114.411-5-AM
Fixture Consumption	12W
Voltage	120-277 V
Delivered Lumen	431 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS12W-16-C0600-RD



Dimmable



Cut out : 1 26/32"X6 1/32" (46X153mm)

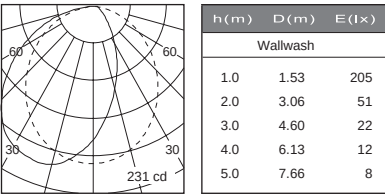


KANO-II-10-TLW




Article number	2114.411-10-AM
Fixture Consumption	21W
Voltage	120-277 V
Delivered Lumen	834 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+
Driver Model	LBS30W-42-C0600-RD



Dimmable

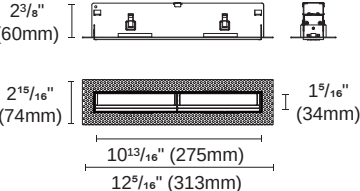


Cut out : 1 26/32"X11 8/32" (46X286mm)

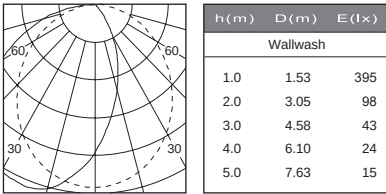


KANO-II-15-TLW




Article number	2114.411-15-AM
Fixture Consumption	28W
Voltage	120-277 V
Delivered Lumen	1217 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+
Driver Model	PSB50W-0850-56




Dimmable


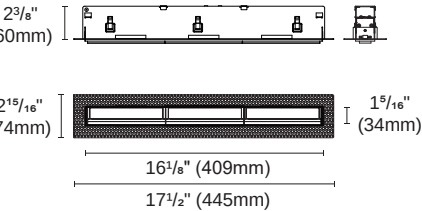


Cut out : 1 26/32"X16 15/32" (46X418mm)


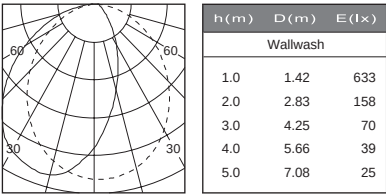


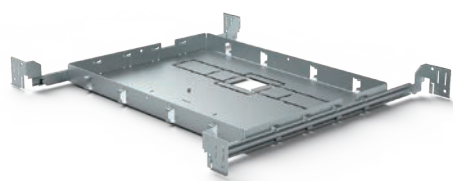



ACCG-25-69x272
Type: New construction plate
Trim Fixed (1T/2T/4T/5T/10T)
Trim Wallwash (5T/10T)

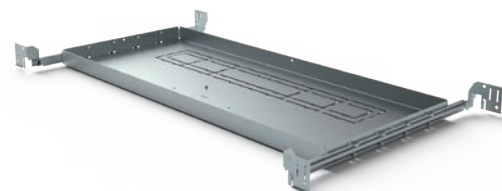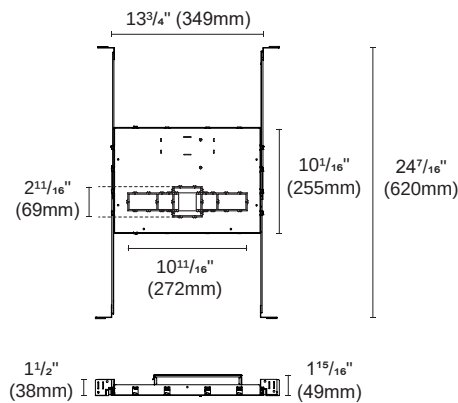


ACCH-1-70x426
Type: New construction plate
Trim Fixed (15T) ,
Trim Adjustable (5T/10T/15T),
Trim Wallwash (15T)

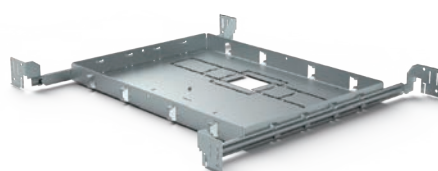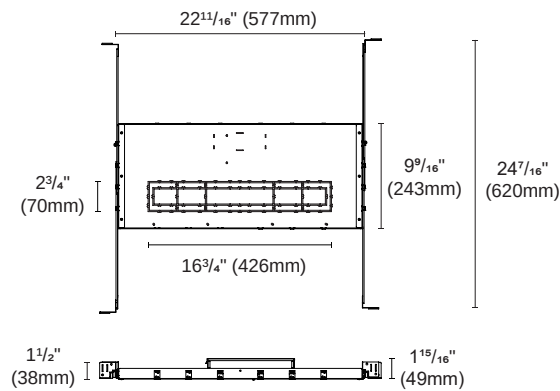

ACCG-25-75X284
Type: New construction plate
Trimless Fixed (1TL/2TL/4TL/5TL/10TL)
Trimless Wallwash (5TL/10TL)

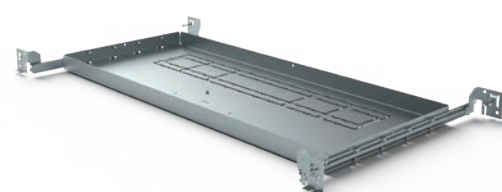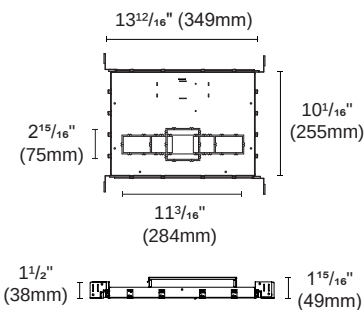


ACCH-1-78X432
Type: New construction plate
Trimless Fixed (15TL) ,
Trimless Adjustable (5TL/10TL/15TL)
Trimless Wallwash (15TL)

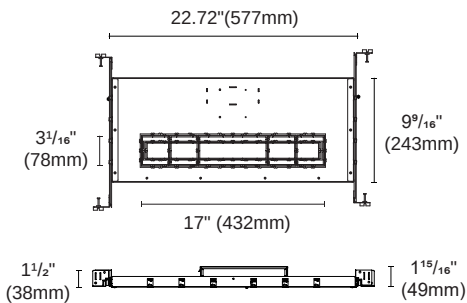




ACCG-26A-LSC4W700P UNI non dim
Type: Gear box and Driver
for 1T / 2T

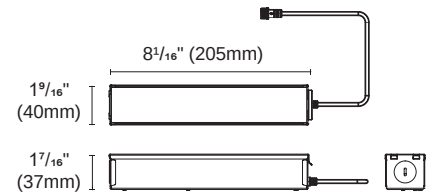

Inside: L 7 3/4" (197mm)X W 1 1/2" (38mm)X H 1 5/16" (34mm)




ACCG-20A-LBS12W-16-C0700-RD for 4T
ACCG-20A-LBS12W-16-C0600-RD for 5T
ACCG-20A-LBS30W-42-C0600-RD for 10T
ACCG-20A-LBS30W-48-C0550-RD for 15T
ACCG-20A-PSB50W-0850-56 for 15TW
Type: Gear box and Driver
0-10V

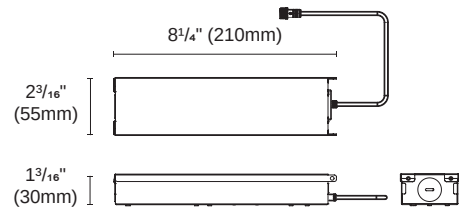

Inside: L 7 7/8" (200mm)X W 2 1/16" (53mm)X H 1 1/16" (27mm)

SKYRIM SERIES (AM)

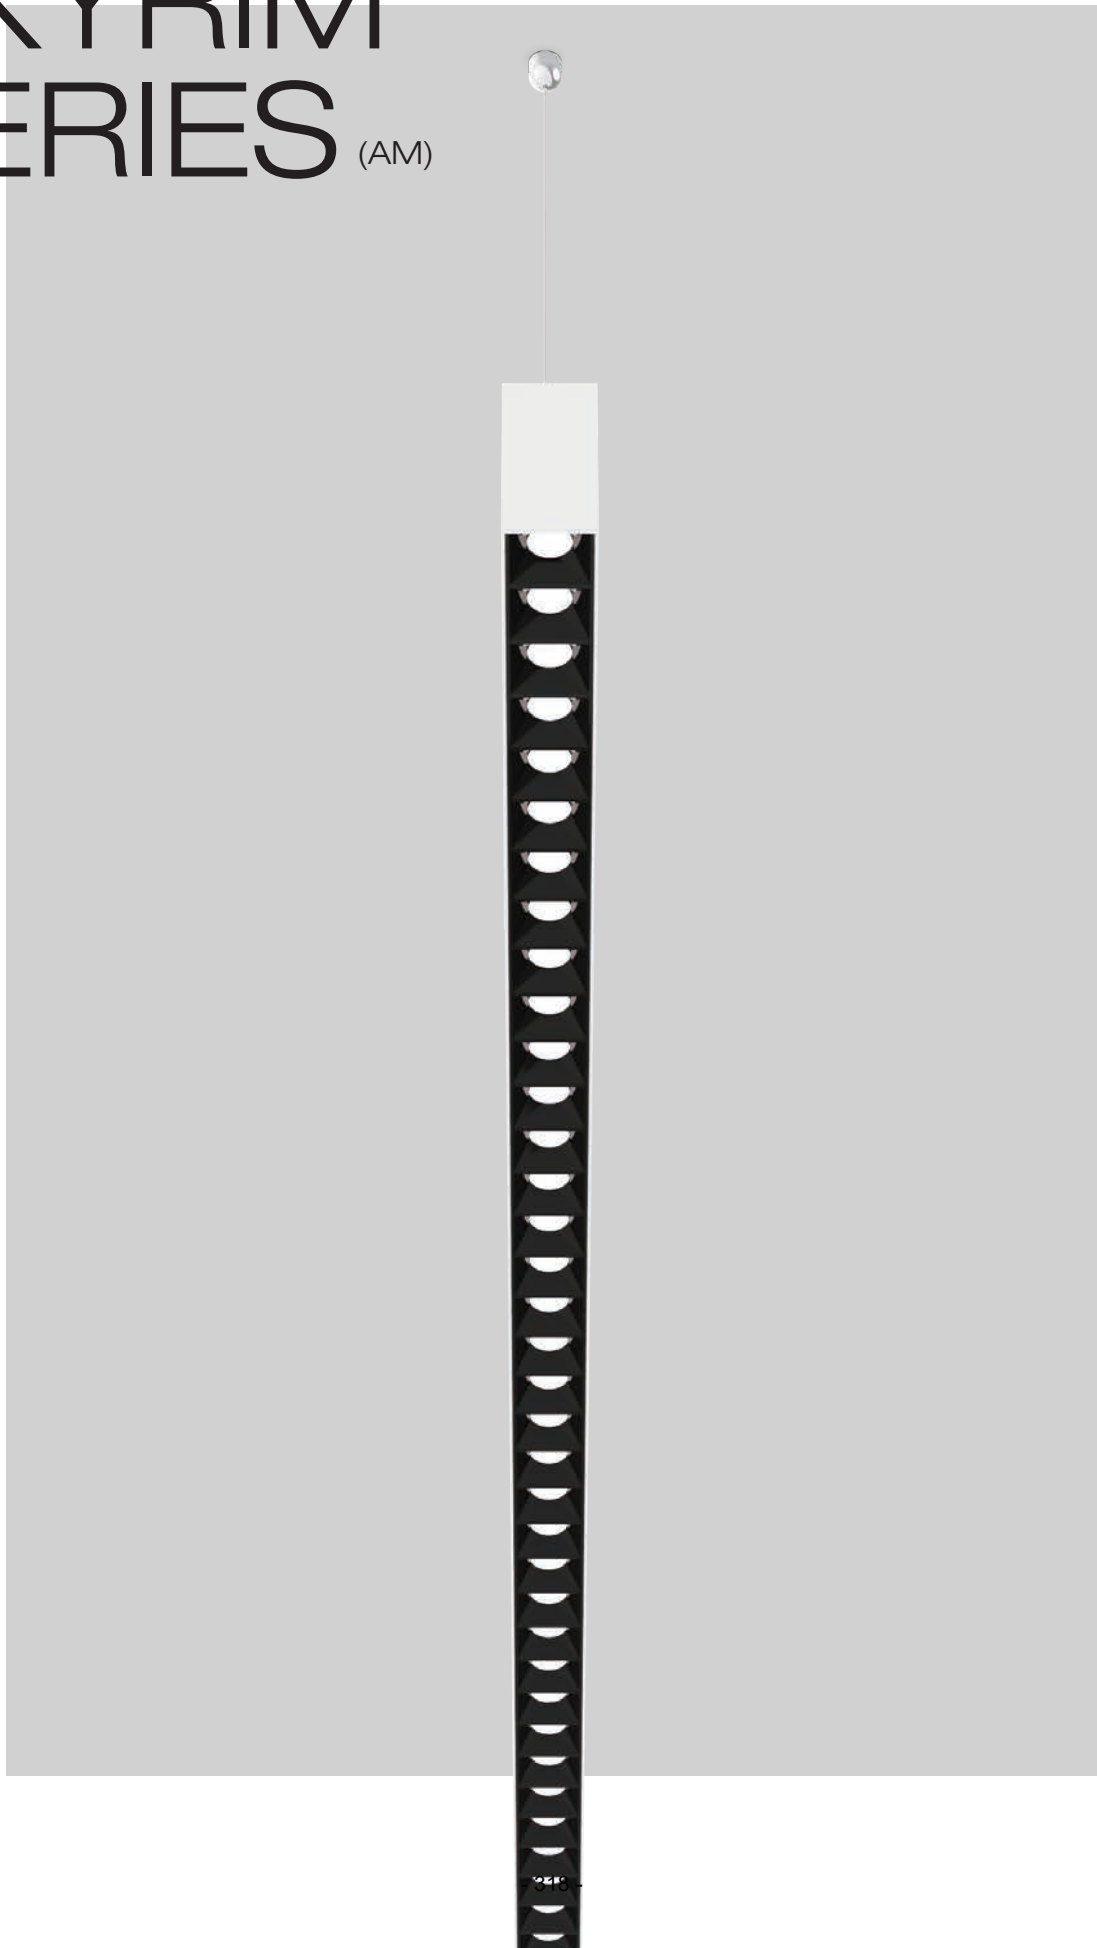

SKYRIM (AM)

SKYRIM is a versatile, elegant and slim office luminaire. Two different mounting options, surface-mounted, and suspended. The series is designed as a lighting solution for upscale offices and commercial interiors.

They ensure uniform illumination and provide pleasing ceiling lighting, creating a friendly working environment.

Shape



Linear

Mountings



Pendant

Light distributions



Downlight


SKYRIM pendant lights
linear

SKYRIM-42-P





Article number	2016.115-AM
Fixture Consumption	28W
Voltage	120V/277V
Delivered Lumen	2381 (lm)
Beam Angle	45° (Lens)
CCT	3000K
CRI	90+
Driver Model	PSB30W-0700-42-S

Colours :  
Black White





Dimmable

0-10V	TRIAC	Driver Built-in
-------	-------	-----------------

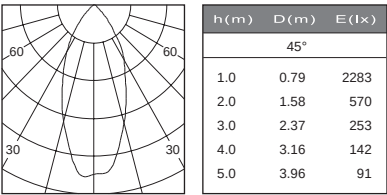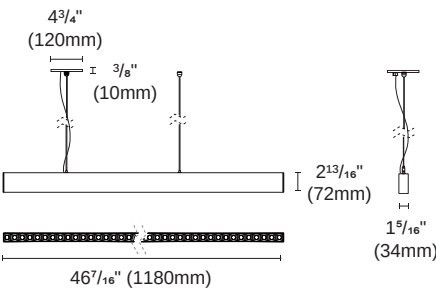



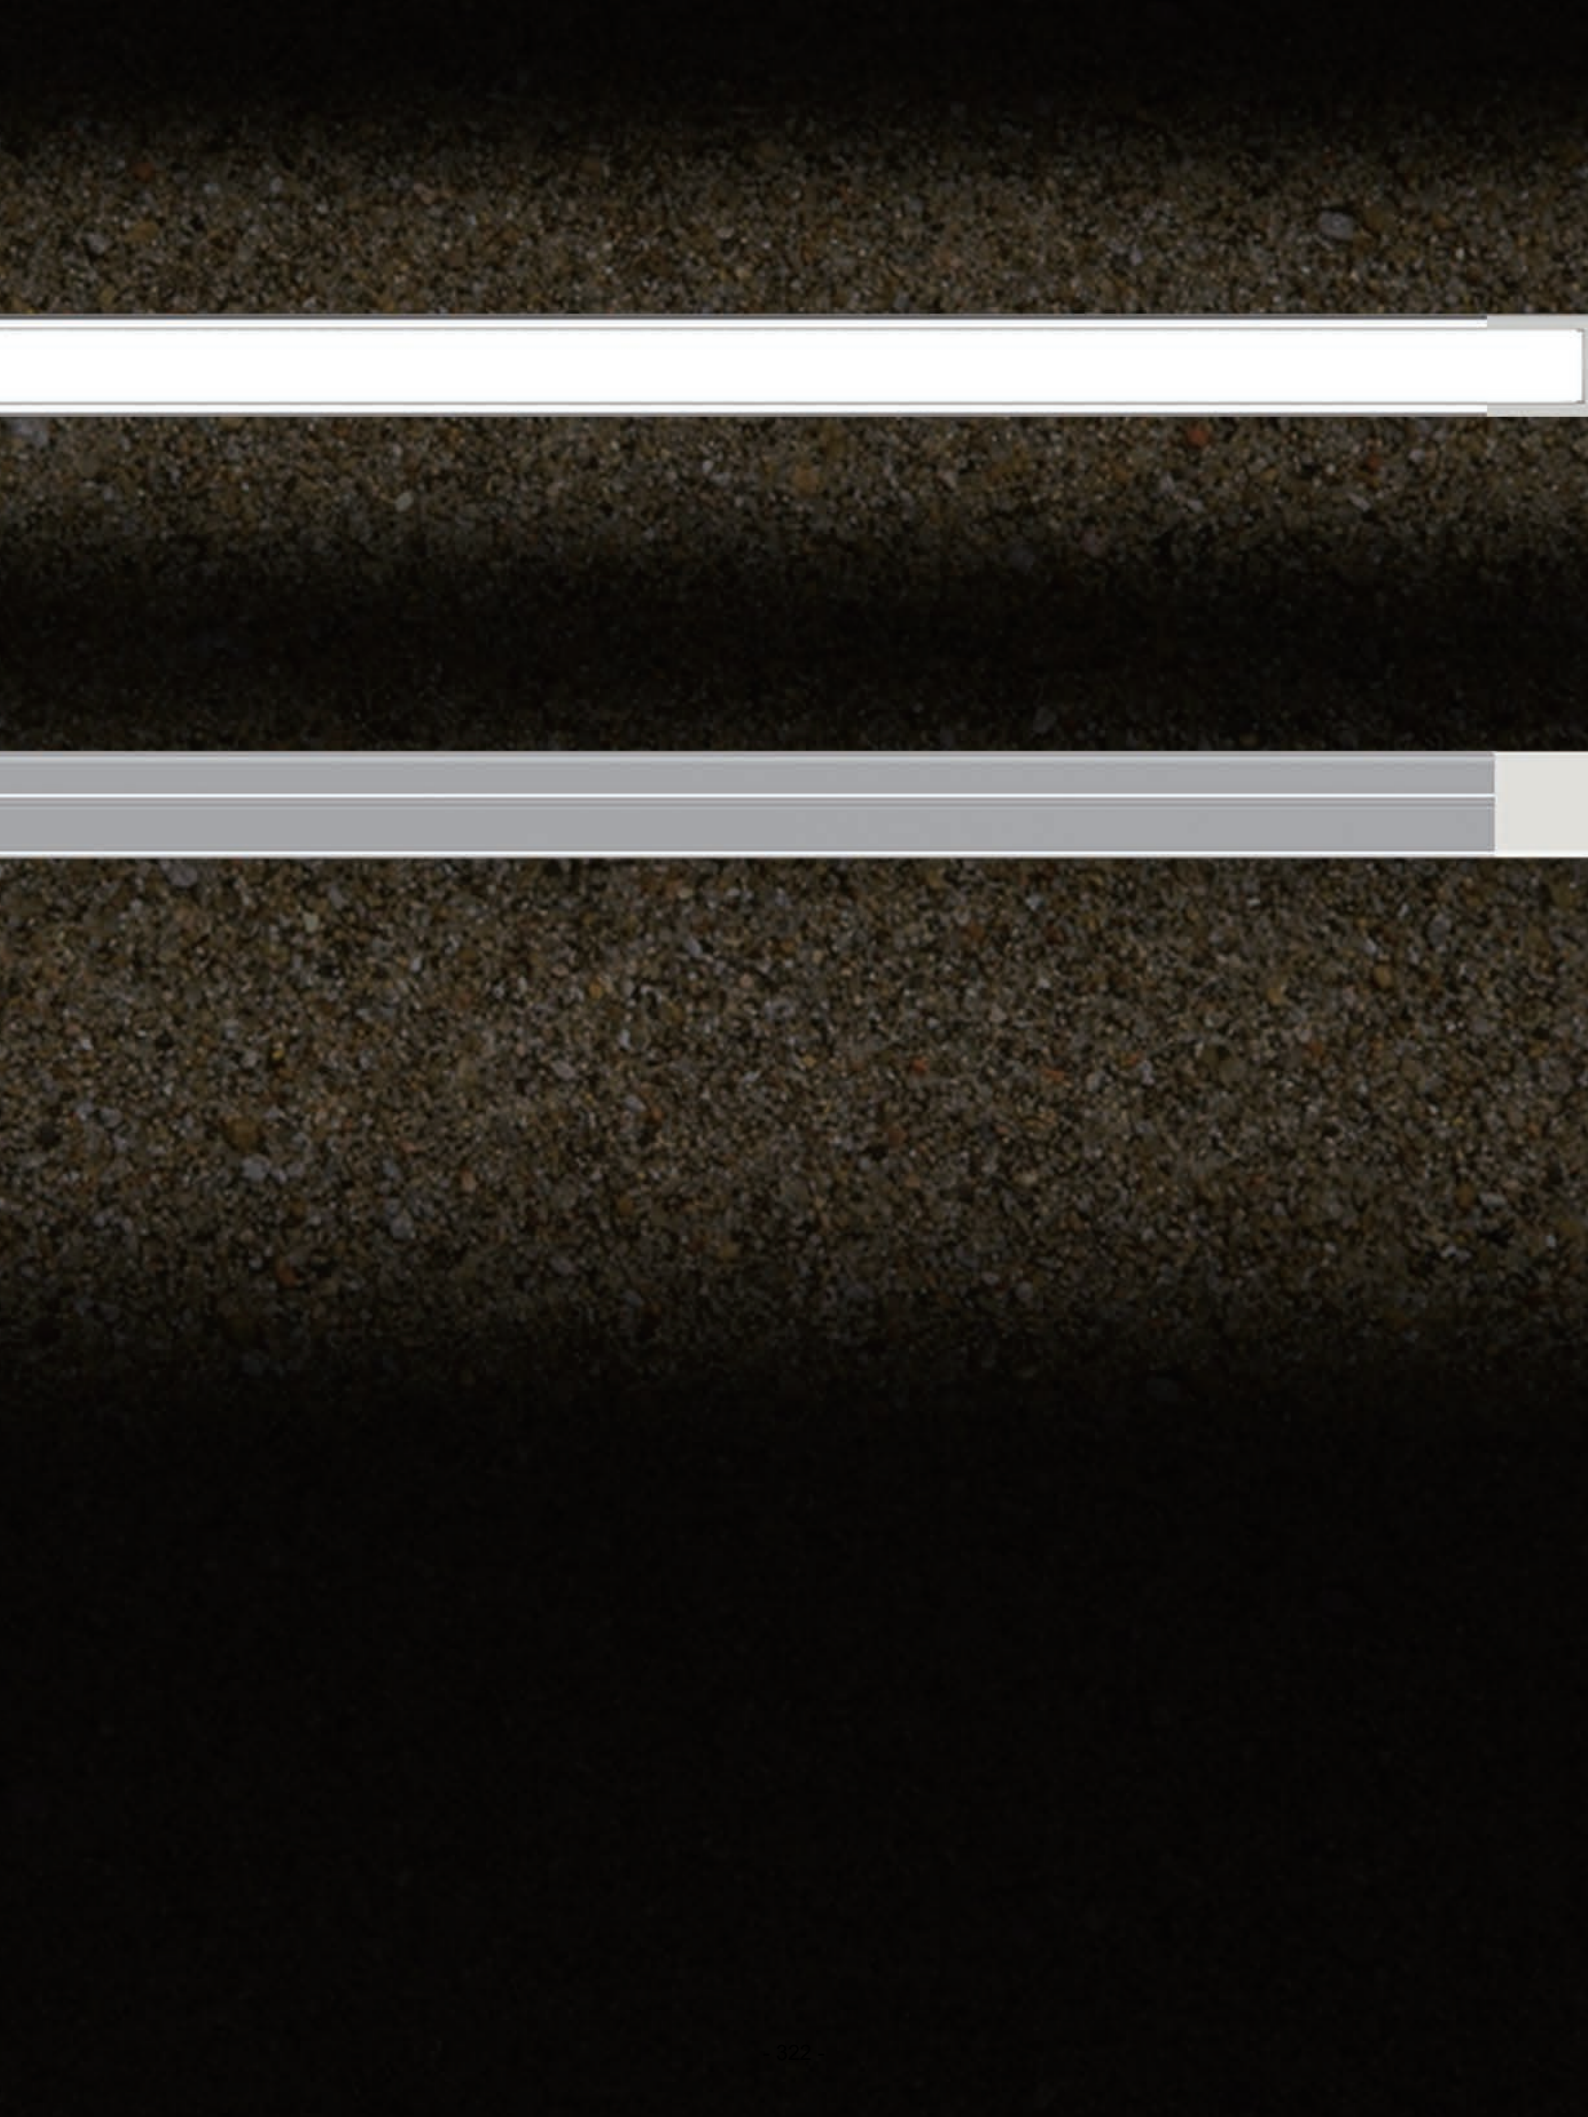

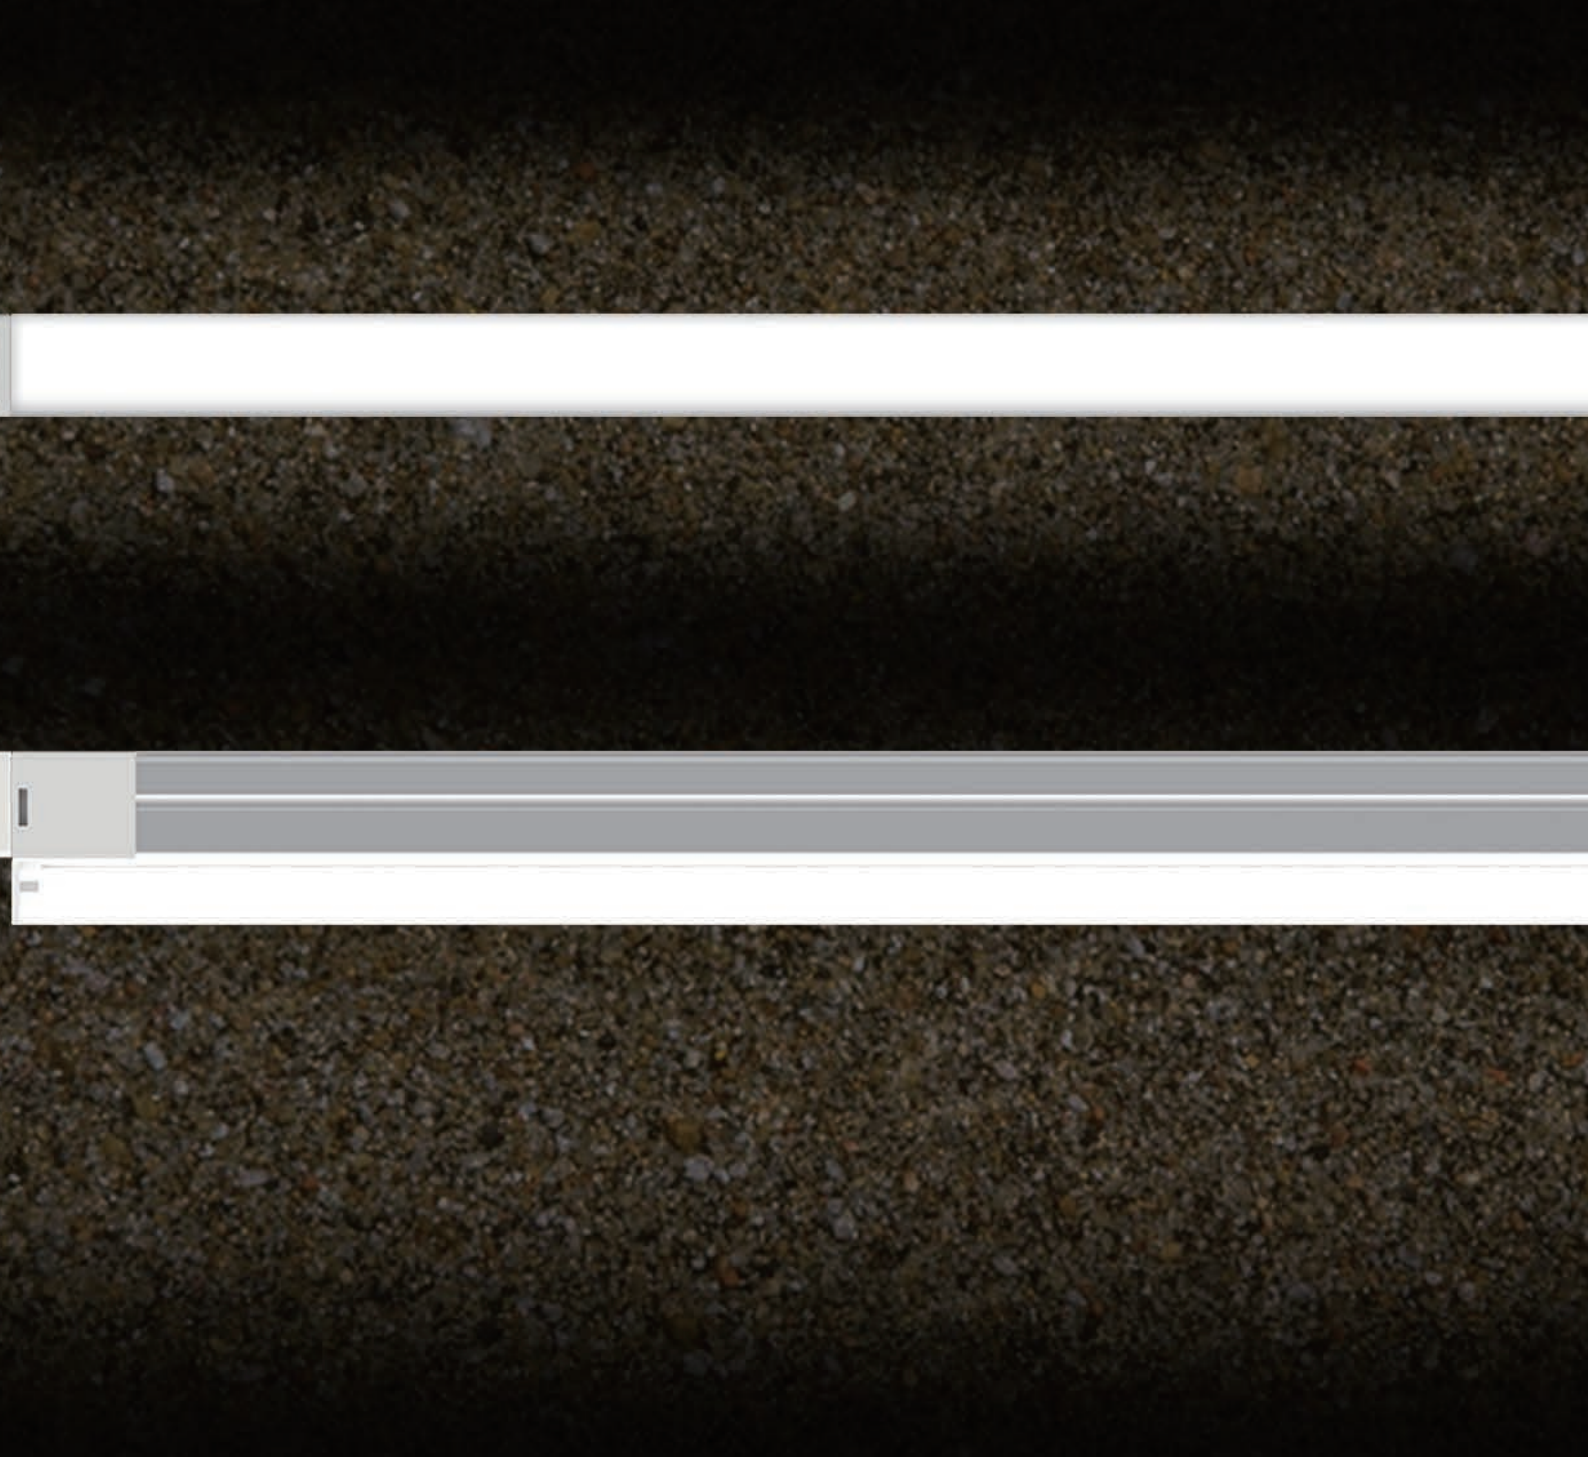

NAHHO

Using male and female connector to speed up the installation, creates continuous seamless light distribution.

With external driver, the fixture is thinner and lighter than standard T5 fixtures, making it cheaper when multiple fixtures are used.

Installation : ceiling and wall mounted.

Insulation : Class III, 24VDC.

Protection : IP20


Approval : CE, ETL




2 mounting methods to secure the fixture, using clips or magnetic, both methods are easy and simple.

Surface mounted installation:

The easiest and quickest way to install the fixtures, suitable for cabinet, cove lighting and DIY.

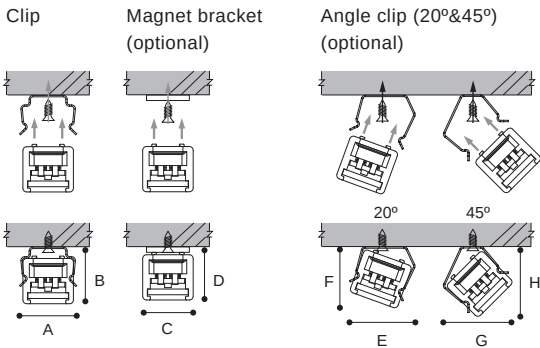


	A	B	C	D	E	F	G	H
NAHHO-SS (Flat type)	0.47" (12mm)	0.47" (12mm)	0.43" (11mm)	0.47" (12mm)	0.55" (14mm)	0.55" (14mm)	0.59" (15mm)	0.59" (15mm)
NAHHO-SS-S (Square type)	0.47" (12mm)	0.71" (18mm)	0.43" (11mm)	0.71" (18mm)	0.63" (16mm)	0.79" (20mm)	0.79" (20mm)	0.79" (20mm)
NAHHO-SS-R (Round type)	0.47" (12mm)	0.71" (18mm)	0.43" (11mm)	0.71" (18mm)	0.63" (16mm)	0.79" (20mm)	0.79" (20mm)	0.79" (20mm)

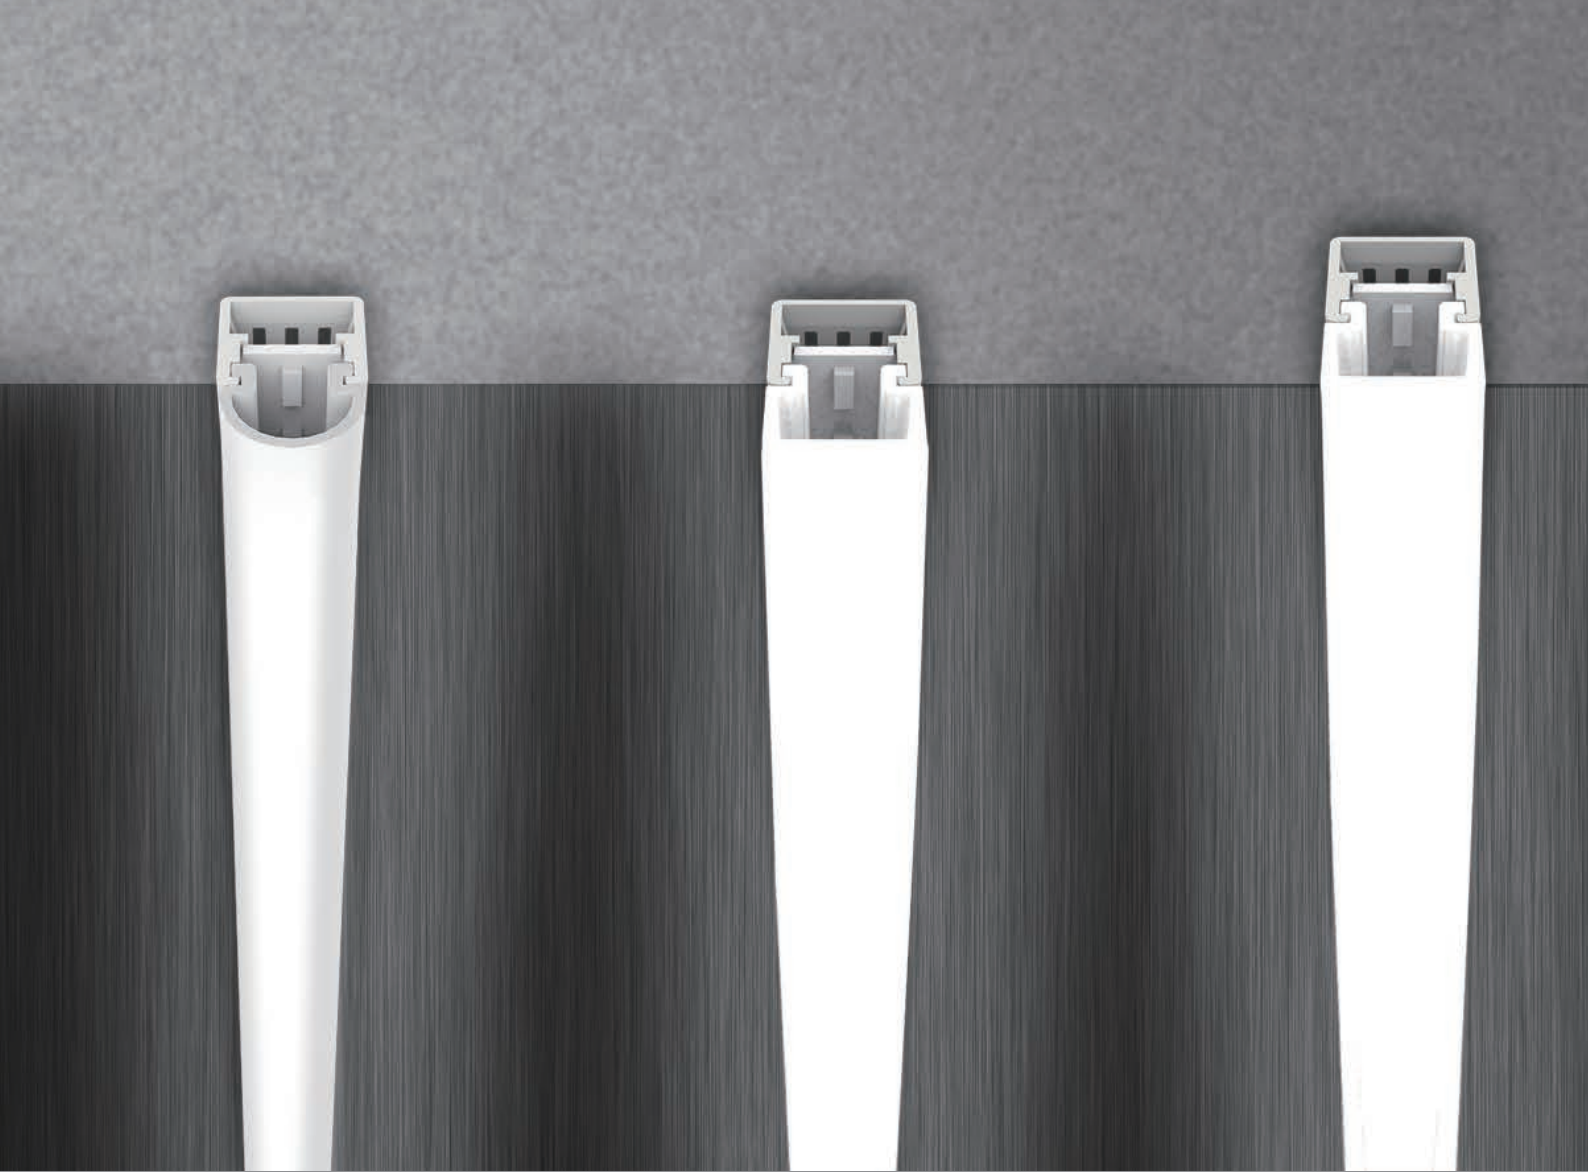


Semi recessed installation:

Only sees the PC cover, suitable for visible linear lighting on ceilings and walls.

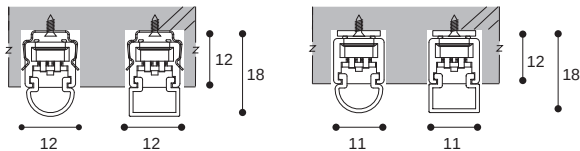

Recessed installation:


Best installation method for square type, making the fixture into the interior design.






Luminaire : aluminum extruded
Diffuser : UV plastic-PC
Clips : 301 stainless steel
CCT range : 3 step MacAdam
Energy efficiency : >75 lm/W(HAHHO-SS)
>95 lm/W(HAHHO-SS-R / HAHHO-SS-S)
Max. connection : 55W

Power cord




CPA-MOL-26-200 for AM
CPE-MOL-26-200 for EU
 Length:200cm with Molex connector



CPA-26-200 for AM
CPE-26-200 for EU
Length:200cm without connector

Connection Cord




CSA-26-15 for AM
CSE-26-15 for EU
Connection cord length:15cm

CSA-26-30 for AM
CSE-26-30 for EU
Connection cord length:30cm

Colours  Anodized alum.

Junction Box



PC-0127P
Molex 4 way parallel connection-

PC-0128P
Molex 6 way parallel connection

PC-1154P
Molex 12 way parallel connection

Chips



NS-0579
Clip (Included in fixture)

Chips




Angle clip (20°&45°)
NS-0592




Magnet bracket
NH-0947



NAHHO-SS

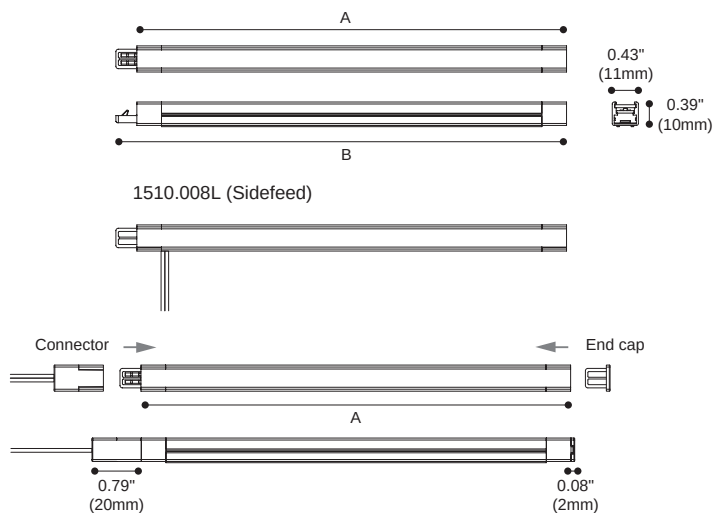

Wattage	A (inch / mm)	B (inch / mm)
1.5W	3.94"(100mm)	4.29"(109mm)
4W	11.22"(285mm)	11.57"(294mm)
8W	22.24"(565mm)	22.6"(574mm)
12W	33.27"(845mm)	33.62"(854mm)
16W	44.21"(1123mm)	44.57"(1132mm)

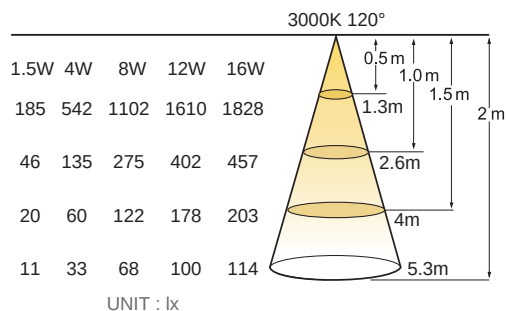


Colours  Anodized alum.

Article Number	LED Consumption	Voltage	Delivered Lumen	Beam Angle	LED Type	LED q'ty	CCT/CRI
1510.008F	1.5 W	24V DC	129 (lm)	120°	SMD	14	30/80+
1510.008F	1.5 W	24V DC	135 (lm)	120°	SMD	14	40/80+
1510.008H	4 W	24V DC	373 (lm)	120°	SMD	42	30/80+
1510.008H	4 W	24V DC	390 (lm)	120°	SMD	42	40/80+
1510.008I	8 W	24V DC	705 (lm)	120°	SMD	84	30/80+
1510.008I	8 W	24V DC	740 (lm)	120°	SMD	84	40/80+
1510.008J	12 W	24V DC	1027 (lm)	120°	SMD	126	30/80+
1510.008J	12 W	24V DC	1078 (lm)	120°	SMD	126	40/80+
1510.008K	16 W	24V DC	1248 (lm)	120°	SMD	168	30/80+
1510.008K	16 W	24V DC	1310 (lm)	120°	SMD	168	40/80+



Sidefeed

1510.008L (with AM cord)	4 W	24V DC	373 (lm)	120°	SMD	42	30/80+
1510.008L (with EU cord)	4 W	24V DC	373 (lm)	120°	SMD	42	30/80+






NAHHO-SS-R

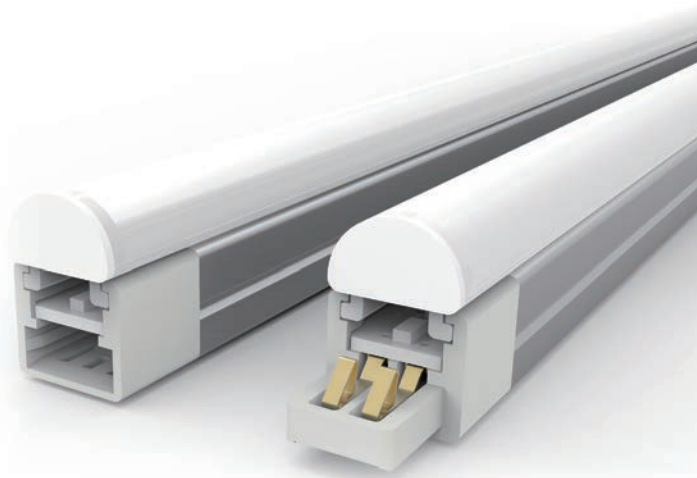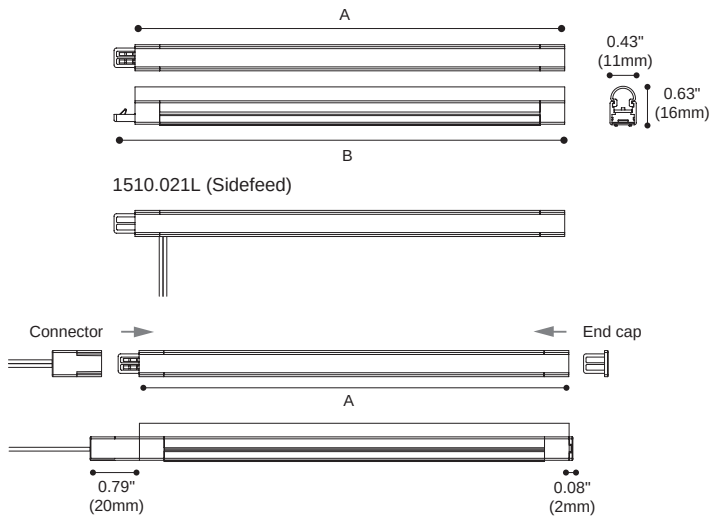

Wattage	A (inch / mm)	B (inch / mm)
1.5W	3.94"(100mm)	4.29"(109mm)
4W	11.22"(285mm)	11.57"(294mm)
8W	22.24"(565mm)	22.6"(574mm)
12W	33.27"(845mm)	33.62"(854mm)
16W	44.21"(1123mm)	44.57"(1132mm)

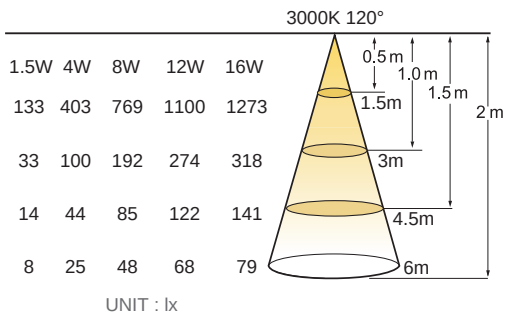


Colours  Anodized alum.

Article Number	LED Consumption	Voltage	Delivered Lumen	Beam Angle	LED Type	LED q'ty	CCT/CRI
1510.021F	1.5 W	24V DC	150 (lm)	120°	SMD	14	30/80+
1510.021F	1.5 W	24V DC	157 (lm)	120°	SMD	14	40/80+
1510.021H	4 W	24V DC	430 (lm)	120°	SMD	42	30/80+
1510.021H	4 W	24V DC	450 (lm)	120°	SMD	42	40/80+
1510.021I	8 W	24V DC	850 (lm)	120°	SMD	84	30/80+
1510.021I	8 W	24V DC	890 (lm)	120°	SMD	84	40/80+
1510.021J	12 W	24V DC	1140 (lm)	120°	SMD	126	30/80+
1510.021J	12 W	24V DC	1200 (lm)	120°	SMD	126	40/80+
1510.021K	16 W	24V DC	1520 (lm)	120°	SMD	168	30/80+
1510.021K	16 W	24V DC	1590 (lm)	120°	SMD	168	40/80+



Sidefeed

1510.021L (with AM cord)	4W	24V DC	430 (lm)	120°	SMD	42	30/80+
1510.021L (with EU cord)	4W	24V DC	430 (lm)	120°	SMD	42	30/80+






NAHHO-SS-S

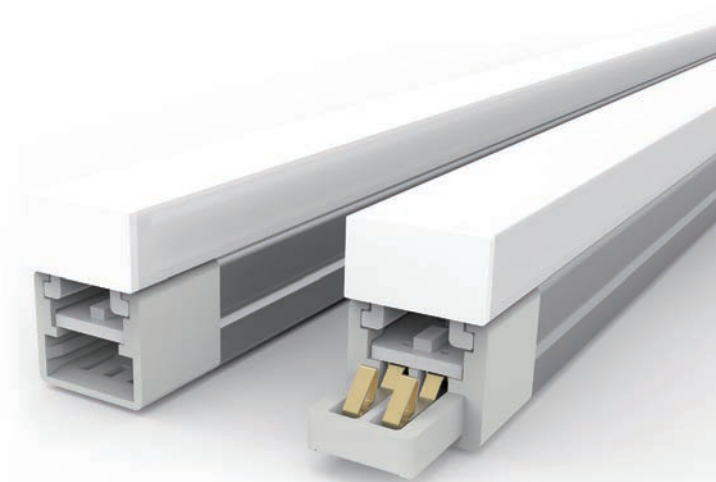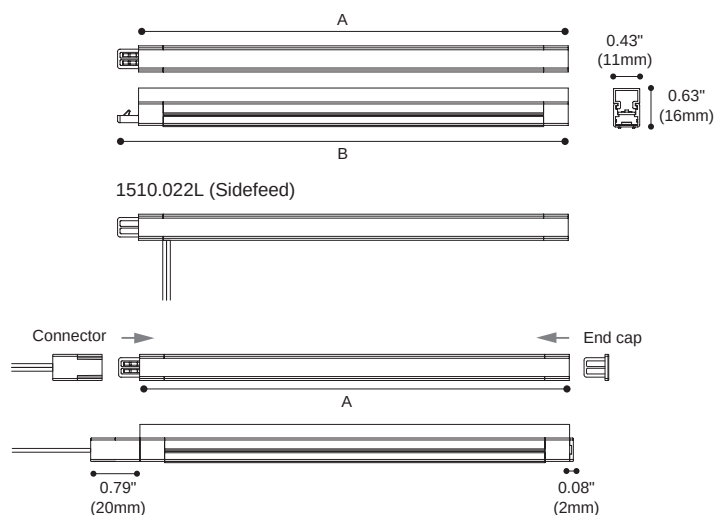

Wattage	A (inch / mm)	B (inch / mm)
1.5W	3.94"(100mm)	4.29"(109mm)
4W	11.22"(285mm)	11.57"(294mm)
8W	22.24"(565mm)	22.6"(574mm)
12W	33.27"(845mm)	33.62"(854mm)
16W	44.21"(1123mm)	44.57"(1132mm)

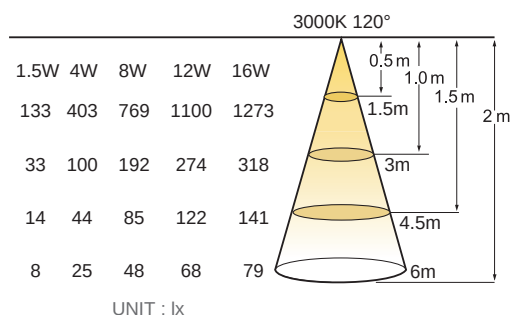

UNIT : lx

Colours Anodized alum.

Article Number	LED Consumption	Voltage	Delivered Lumen	Beam Angle	LED Type	LED q'ty	CCT/CRI
1510.022F	1.5 W	24V DC	150 (lm)	120°	SMD	14	30/80+
1510.022F	1.5 W	24V DC	157 (lm)	120°	SMD	14	40/80+
1510.022H	4 W	24V DC	430 (lm)	120°	SMD	42	30/80+
1510.022H	4 W	24V DC	450 (lm)	120°	SMD	42	40/80+
1510.022I	8 W	24V DC	850 (lm)	120°	SMD	84	30/80+
1510.022I	8 W	24V DC	890 (lm)	120°	SMD	84	40/80+
1510.022J	12 W	24V DC	1140 (lm)	120°	SMD	126	30/80+
1510.022J	12 W	24V DC	1200 (lm)	120°	SMD	126	40/80+
1510.022K	16 W	24V DC	1520 (lm)	120°	SMD	168	30/80+
1510.022K	16 W	24V DC	1590 (lm)	120°	SMD	168	40/80+

Sidefeed

1510.022L (with AM cord)	4 W	24V DC	430 (lm)	120°	SMD	42	30/80+
1510.022L (with EU cord)	4 W	24V DC	430 (lm)	120°	SMD	42	30/80+

